



FTXG-E/RXG-E CTXG-E/RXG-E

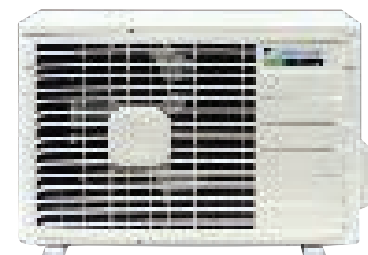


RXG25,35E

Comfort mode:

The new wide-angle distribution flap reassures draught free operation. During cooling operation the flap angle turns horizontally to prevent cold air blowing directly on the body, while during heating operation it turns downward vertically to send the warm air directly to the feet.




Cooling mode



Heating mode

3-D Air flow:

This function combines Vertical and Horizontal auto-swing to circulate a stream of cool/warm air right to the corners of even large spaces.

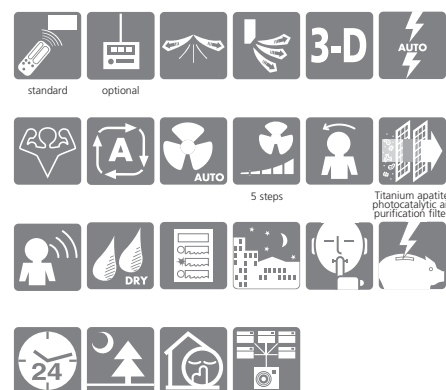

HEAT PUMP

INDOOR UNIT (air cooled)				FTXG25E-W/S	FTXG35E-W/S	CTXG50E-W/S
Cooling capacity		min ~ nom ~ max	kW	130 ~ 250 ~ 300	140 ~ 350 ~ 380	For more detailed information about capacities, power input, EER/COP, Energy label and Annual energy consumption, please refer to our Multi Model catalogue/combination tables/Super Multi Plus catalogue or check with your local dealer.
Heating capacity		min ~ nom ~ max	kW	130 ~ 340 ~ 450	140 ~ 420 ~ 500	
Nominal input	cooling	min ~ nom ~ max	kW	0.30 ~ 0.62 ~ 0.95	0.30 ~ 1.06 ~ 1.29	
	heating	min ~ nom ~ max	kW	0.29 ~ 0.82 ~ 1.42	0.31 ~ 1.13 ~ 1.56	
EER				4.03	3.30	
COP				4.15	3.72	
Energy label	cooling			A	A	
	heating			A	A	
Annual energy consumption		cooling	kWh	310	530	
Dimensions		HxWxD	mm	275x840x150		
Weight			kg	9		
Air flow rate	cooling	H/L/SL	m ³ /min	7.7/4.7/3.8	8.1/4.9/4.1	11.3/7.1/6.7
	heating	H/L/SL	m ³ /min	9.0/6.7/5.4	9.6/6.7/5.9	12.6/8.7/7.7
Sound pressure level	cooling	H/L/SL	dB(A)	38/25/22	39/26/23	47/35/32
	heating	H/L/SL	dB(A)	38/28/25	39/29/26	47/35/32
Sound power level	cooling	H	dB(A)	56	57	64
Refrigerant type				R-410A		
Power supply			V1	1 ~, 220 ~ 240V, 50Hz		
Infrared remote control				ARC433A41		

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT				RXG25E	RXG35E	2,3,4,5MXS-D/E / RMXS-EV
Dimensions		HxWxD	mm	550x765x285		For more specifications, please refer to page 89 and 92 of this catalogue.
Weight			kg			
Sound pressure level	cooling	H/L	dB(A)	46/43	47/44	
	heating	H/L	dB(A)	47/44	48/45	
Sound power level	cooling	H	dB(A)	61	62	
Operation range	cooling	from ~ to	°CDB	-10 ~ 46		
	heating	from ~ to	°CWB	-15 ~ 20		
Refrigerant type				R-410A		
Power supply			V1	1 ~, 220 ~ 240V, 50Hz		
Piping connections	liquid/gas	mm	ø6.4/ø9.5		ø6.4/ø12.7	
Max. piping length/Max. level difference			m	20/15 30/20		