



FTXG-E / RXG-E

Wall mounted unit




ARC 433A41

FTXG 25,35E-S

FTXG 25,35E-W

RXG25,35E

- State of the art design: sleek, compact and stylish outlook
- Available in 2 colour variations: matt crystal white and matt crystal silver
- Lightweight and compact
- Easy to clean flat suction grille
- Superb energy efficiency
- Movement sensor saves power consumption in unoccupied rooms
- Comfort mode for draught free operation thanks to the new wide angle distribution flap
- The new titanium apatite photocatalytic air purification filter increases the active surface area for effective purification and deodorisation
- Horizontal and vertical auto-swing 3D-air flow ensure efficient air and temperature distribution.
- Powerful mode can be selected for rapid cooling or heating
- Indoor / outdoor unit silent operation

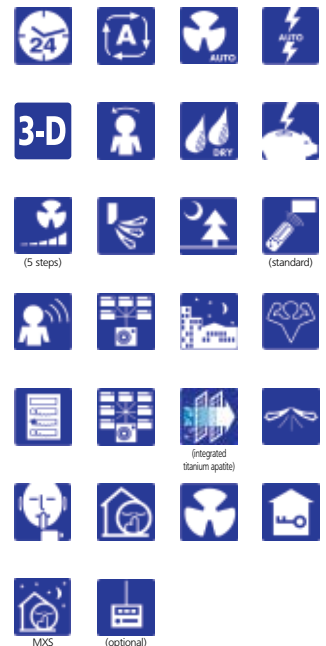

HEAT PUMP

INVERTER

Indoor Units				FTXG25EV1BW	FTXG25EV1BS	FTXG35EV1BW	FTXG35EV1BS
Nominal Capacity	Cooling capacity	Minimum	kW	1.3		1.4	
		Standard	kW	2.5		3.5	
		Maximum	kW	3.0		3.8	
	Heating capacity	Minimum	kW	1.3		1.4	
		Standard	kW	3.4		4.2	
		Maximum	kW	4.5		5.0	
Annual energy consumption			kWh	310		530	
EER / COP		Cooling / Heating		4.03 / 4.15		3.30 / 3.72	
Energy Label		cooling / heating		A / A			
Dimensions		(Height x Width x Depth)		mm 275x840x150			
Weight				kg 9.0			
Air Flow Rate	Cooling	H/M/L/SL	m³/min	7.7 / 6.1 / 4.7 / 3.8		8.1 / 6.5 / 4.9 / 4.1	
	Heating	H/M/L/SL	m³/min	9.0 / 7.9 / 6.7 / 5.4		9.6 / 8.2 / 6.7 / 5.9	
Sound Power	Cooling	High	dBA	56.0		57.0	
	Heating	High	dBA	56.0		57.0	
Sound Pressure	Cooling	H/M/L/SL	dBA	38.0 / 32.0 / 25.0 / 22.0		39.0 / 33.0 / 26.0 / 23.0	
	Heating	H/M/L/SL	dBA	38.0 / 33.0 / 28.0 / 25.0		39.0 / 34.0 / 29.0 / 29.0	
Refrigerant			Type	R-410A			
Power Supply				1~/220-240V/50Hz			

Outdoor Unit				RXG25E2V1B	RXG35E2V1B
Dimensions		(Height x Width x Depth)		mm 550x765x285	
Weight				kg 32	
Sound pressure level	Cooling	H	dBA	46	47
	Heating	H	dBA	47	48
Sound power level	Cooling	H	dBA	61	62
Operation Range	Cooling	Min~Max	°CDB	10.0~46.0	
	Heating	Min~Max	°CWB	-15.0~20.0	-15~20
Refrigerant			Type	R-410A	
Power Supply				1~/230V/50Hz	
Piping connections		Liquid (OD)/Gas/Drain	mm	6.35 / 9.5 / 18	
Piping Length (Maximum)			m	20	
Max. internunit level difference			m	15.0	