




Wall Mounted Unit - UX1

INVERTER FTXG-E / RXG-E

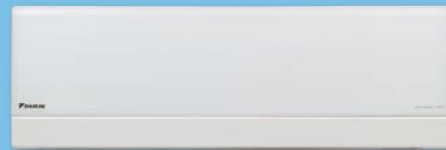

White (W)



Silver (S)



Wireless remote control as standard



- State of the art design, with a sleek, compact and stylish outlook. Depth of only 15cm when in standby mode or switched off.
- **Inverter technology:** reduces the power consumption by up to 30% compared to non inverter units and ensures maximum comfort, operating silence and reliability.
- **Home Leave operation:** automatically keeps the room temperature at a specified favourite comfort level during extended absence, by switching to heating when it reaches the minimum level and to cooling at the maximum level.
- **Movement sensor function:** if the room remains unoccupied for more than 20 minutes, the system automatically switches to the energy efficient mode. When people return into the room again, the system restores the original setting.
- **Night set mode:** prevents any sudden change in room temperature by gently raising/lowering the temperature before the system stops, so you can sleep more comfortably.
- **Powerful operation:** activates the maximum air volume for 20 minutes to cool or warm the room quickly.
- **Comfort mode:** guarantees draught free operation. When cooling, the flap is positioned horizontally to prevent cold air flow directly onto the body. When heating, the flap turns vertically down directing warm air to the bottom of the room.
- **Titanium apatite photocatalytic air purifying filter:** superior adsorption power. Besides mould and odours, it also adsorbs and decomposes bacteria and viruses for effective purification and deodorisation of the air inside the room.
- **Dry programme:** Daikin's special dry programme reduces humidity in the rooms without variations in internal temperature.
- **Silent operation function:** increase comfort by further reducing the already 'whisper quiet' noise emissions.
- **Fan speed:** 5 fan speeds can be selected, high to super low.
- **Self diagnosis digital display:** in the unlikely event that an abnormality occurs, the LCD remote controller displays the error code allowing prompt maintenance.
- **Auto-restart function:** after a power failure in the building, the system automatically restarts to the setting in operation before the power failure.

Height	275mm
Width	840mm
Depth	150mm



FTXG25E

Height	550mm
Width	765mm
Depth	285mm



RXG25E

See tables overleaf for full list of dimensions

**ENERGY LABEL:
CLASS
A**

HEAT PUMP

INVERTER

Indoor Units				FTXG25E-W	FTXG25E-S	FTXG35E-W	FTXG35E-S
Nominal Capacity	Cooling capacity	Minimum	kW	1.3		1.4	
		Standard	kW	2.5		3.5	
		Maximum	kW	3.0		3.8	
	Heating capacity	Minimum	kW	1.3		1.4	
		Standard	kW	3.4		4.2	
		Maximum	kW	4.5		5.0	
Annual energy consumption			kWh	310		530	
EER / COP	Cooling / Heating			4.03 / 4.15		3.30 / 3.72	
Energy Label	cooling / heating			A / A			
Dimensions	(Height x Width x Depth)		mm	275x840x150			
Weight				kg			
Air Flow Rate	Cooling	H/M/L/SL	m ³ /min	7.7 / 6.1 / 4.7 / 3.8		8.1 / 6.5 / 4.9 / 4.1	
	Heating	H/M/L/SL	m ³ /min	9.0 / 7.9 / 6.7 / 5.4		9.6 / 8.2 / 6.7 / 5.9	
Sound Power	Cooling	High	dBA	56.0		57.0	
	Heating	High	dBA	56.0		57.0	
Sound Pressure	Cooling	H/M/L/SL	dBA	38.0 / 32.0 / 25.0 / 22.0		39.0 / 33.0 / 26.0 / 23.0	
	Heating	H/M/L/SL	dBA	38.0 / 33.0 / 28.0 / 25.0		39.0 / 34.0 / 29.0 / 29.0	
Refrigerant	Type			R-410A			
Power Supply				1~/220-240V/50Hz			
Controller				ARC433A41			
Outdoor Unit				RXG25E	RXG35E		
Dimensions	(Height x Width x Depth)		mm	550x765x285			
Weight				kg			
Sound pressure level	Cooling	H	dBA	46		47	
	Heating	H	dBA	47		48	
Sound power level	Cooling	H	dBA	61		62	
Operation Range	Cooling	Min~Max	°CDB	10.0~46.0			
	Heating	Min~Max	°CWB	-15~20		-15~20	
Refrigerant	Type			R-410A			
Power Supply				1~/230V/50Hz			
Piping connections	Liquid (OD)/Gas/Drain	mm		6.35 / 9.5 / 18			
Piping Length (Maximum)				m			
Max Installation Height Difference				m			



Authorised User No. 02061

Visit www.eca.gov.uk/etl and type 'Daikin' in the quick search box for details of the latest ECA qualifying Daikin units

www.daikin.co.uk

Daikin products are distributed by:

FSC



Daikin units comply with the European regulations that guarantee the safety of the product.



Daikin Europe N.V. participates in the Eurovent Certification Programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FC); the certified data of certified models are listed in the Eurovent Directory. Multi units are Eurovent certified for combinations up to 2 indoor units.