

Wall mounted unit

FTXJ-MS/FTXJ-MW



BLUEVOLUTION



2 area intelligent eye



Energy saving during standby mode



Whisper quiet



Online controller via app



Multi model application


Design at its best, delivering superior efficiency and comfort

- › Remarkable blend of iconic design and engineering excellence with an elegant silver coloured or matt crystal white finish
- › Silver allergen removal and air purifying filter: captures allergens such as pollen and dust mites. The filter suppresses pollen and mites for 99% or more.
- › Online controller: control your indoor from any

location with an app, via your local network or internet

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Seasonal efficiency values up to A+++ in cooling and heating

FTXJ-MS/FTXJ-MW + RXJ-M

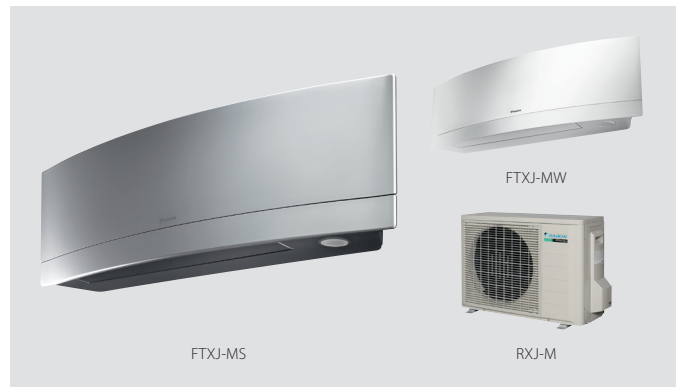

Indoor unit		FTXJ	20MS	20MW	25MS	25MW	35MS	35MW	50MS	50MW
Casing	Colour		Silver	White	Silver	White	Silver	White	Silver	White
Dimensions	Unit	HeightxWidthxDepth	mm							
			303x998x212							
Sound power level	Cooling	dBA	54				59		60	
	Heating	dBA	56				59		60	
Sound pressure level	Cooling	High/Low/Silent operation	38/25/19				45/26/20		46/35/32	
	Heating	High/Low/Silent operation	40/28/19		41/28/19		45/29/20		47/35/32	
Control systems	Infrared remote control	ARC466A9								

EER/COP according to Eurovent 2012, for use outside EU only | Nominal efficiency: cooling at 35°/27° nominal load, heating at 7°/20° nominal load


Efficiency data		FTXJ + RXJ	20MS + 20M	20MW + 20M	25MS + 25M	25MW + 25M	35MS + 35M	35MW + 35M	50MS + 50M	50MW + 50M	
Cooling capacity	Nom.	kW	2.3		2.4		3.5		4.80		
Heating capacity	Nom.	kW	2.5		3.2		4		5.80		
Power input	Cooling	Nom.	0.50		0.51		0.86		1.43		
	Heating	Nom.	0.50		0.70		0.99		1.59		
Seasonal efficiency (according to EN14825)	Cooling	Energy efficiency class	A+++				A++				
		Pdesign	2.30		2.40		3.50		4.80		
		SEER	8.73		8.64		7.19		7.02		
	Heating (Average climate)	Annual energy consumption	kWh	92		97		170		239	
		Energy efficiency class		A++				A+			
		Pdesign	kW	2.10		2.70		3.00		4.60	
Nominal efficiency	EER	SCOP/A	4.61		4.60		4.28		4.28		
		Annual energy consumption	kWh	638		822		913		1,505	
	COP	EER	4.64		4.73		4.09		3.35		
		COP	5.00		4.57		4.04		3.65		
Energy labeling	Cooling						A				
	Heating						A				

EER/COP according to Eurovent 2012, for use outside EU only | Nominal efficiency: cooling at 35°/27° nominal load, heating at 7°/20° nominal load

Outdoor unit		RXJ	20M	25M	35M	50M
Dimensions	Unit	HeightxWidthxDepth	mm			
			550x765x285			
Sound power level	Cooling	dBA	61		63	
	Heating	dBA	62		63	
Sound pressure level	Cooling	High/Silent operation	46/43		48/45	
	Heating	High/Silent operation	47/44		48/45	
Operation range	Cooling	Ambient Min.-Max.	°CDB			
			-10~46			
Heating	Ambient Min.-Max.	°CWB				
			-15~18			
Refrigerant	Type/Charge/GWP	kg/TCO ₂ eq	R-32/0.72/0.5/675			R-32/1.30/0.9/675
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240			

Contains fluorinated greenhouse gases

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN16-041A

01/17



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.