



FAQ-B / RZQS-B

Wall Mounted Unit



BRC1D52 BRC7E618/C510




FAQ71,100B



RZQS71,100B

- Fits neatly on a wall
- Ideal for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- Auto-swing function ensures efficient air distribution via louvers that close automatically when the unit is switched off
- Automatic movable louver can be fixed at any desired angle
- Both horizontal flaps and front panel can easily be removed and washed
- All maintenance operations can be carried out from the front of the unit

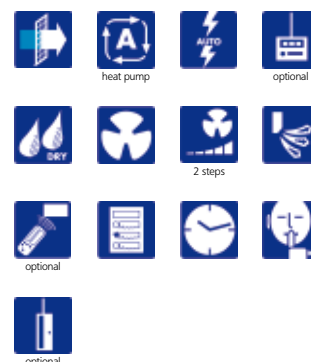

HEAT PUMP

INVERTER

Indoor Units				FAQ71BVV1B	FAQ100BVV1B
Nominal Capacity	Cooling capacity	Standard	kW	7.10	10.00
	Heating capacity	Standard	kW	8.00	11.20
EER / COP	Cooling / Heating			2.81 / 3.01	2.45 / 3.00
Annual energy consumption			kWh	1265	2040
Energy Label	cooling / heating			C / D	E / D
Dimensions	(Height x Width x Depth)		mm	290x1050x230	360x1570x200
Weight			kg	13.0	26.0
Air Flow Rate	Cooling	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0
	Heating	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0
Sound Power	Cooling	High/Low	dBA	59.0 / 53.0	61.0 / 57.0
	Heating	High/Low	dBA	59.0 / 53.0	61.0 / 57.0
Sound Pressure	Cooling	High/Low	dBA	43.0 / 37.0	45.0 / 41.0
	Heating	High/Low	dBA	43.0 / 37.0	45.0 / 41.0
Refrigerant			Type	R-410A	R-410A
Power Supply				1~/230V/50Hz	1~/230V/50Hz

Outdoor Unit				RZQS71B7V3B	RZQS100B7V3B
Dimensions	(Height x Width x Depth)		mm	770x900x320	770x900x320
Weight			kg	68	68
Operation Range	Cooling	Min~Max	°CDB	-5.0~46.0	-5.0~46.0
	Heating	Min~Max	°CWB	-15.0~15.5	-15.0~15.5
Sound pressure level	Cooling (night quiet mode)		dBA	49 (43)	51 (45)
	Heating		dBA	51	55
Sound power level	Cooling		dBA	65	67
Refrigerant			Type	R-410A	R-410A
Power Supply				1~/230V/50Hz	1~/230V/50Hz
Piping connections	Liquid (OD)/Gas/Drain		mm	9.52 / 15.9 / 26	9.52 / 15.9 / 26
Piping Length (Maximum)			m	30	50
Max. internunit level difference			m	15	30



FAQ-B / RZQ-B/C

Wall Mounted Unit



BRC1D52 BRC7E618/C510




FAQ71,100B



RZQ100B

- Fits neatly on a wall
- Ideal for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- Auto-swing function ensures efficient air distribution via louvers that close automatically when the unit is switched off
- Automatic movable louver can be fixed at any desired angle
- Both horizontal flaps and front panel can easily be removed and washed
- All maintenance operations can be carried out from the front of the unit

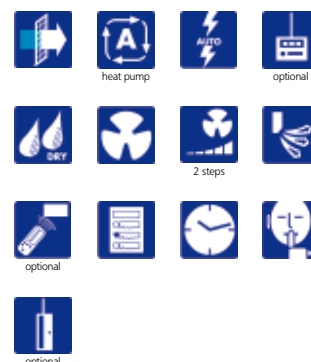

HEAT PUMP

INVERTER

Indoor Units				FAQ71B9V1B	FAQ100B9V1B
Nominal Capacity	Cooling capacity	Standard	kW	7.1	10.0
	Heating capacity	Standard	kW	8.0	11.2
EER / COP	Cooling / Heating			3.01 / 3.31	2.9 / 3.43
Annual energy consumption			kWh	1180	1725
Energy Label	cooling / heating			B / C	C / B
Dimensions	(Height x Width x Depth)		mm	290x1050x230	360x1570x200
Weight			kg	13.0	26.0
Air Flow Rate	Cooling	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0
	Heating	High/Low	m³/min	19.0 / 15.0	23.0 / 19.0
Sound Power	Cooling	High/Low	dBA	59.0 / 53.0	61.0 / 57.0
	Heating	High/Low	dBA	59.0 / 53.0	61.0 / 57.0
Sound Pressure	Cooling	High/Low	dBA	43.0 / 37.0	45.0 / 41.0
	Heating	High/Low	dBA	43.0 / 37.0	45.0 / 41.0
Refrigerant			Type	R-410A	R-410A
Power Supply				1~230V/50Hz	1~230V/50Hz

Outdoor Unit				RZQ71B9V3B1	RZQ100C7V1B	RZQ100B8W1B
Dimensions	(Height x Width x Depth)		mm	770x900x320	1170x900x320	1345x900x320
Weight			kg	68	103	106
Sound pressure level	Cooling (Night quiet mode)		dBA	47 (43)	49 (45)	49 (45)
	Heating		dBA	49	51	51
Sound power level	Cooling		dBA	63	65	65
	Heating		dBA	63	65	65
Operation Range	Cooling	Min~Max	°CDB	-15.0~50.0	-15~50.0	-15.0~50.0
	Heating	Min~Max	°CWB	-20.0~15.5	-20~15.5	-20.0~15.5
Refrigerant			Type	R-410A	R-410A	R-410A
Power Supply				1~230V/50Hz	1~230V/50Hz	3~400V/50Hz
Piping connections	Liquid (OD)/Gas/Drain		mm	9.52 / 15.9 / 26	9.52 / 15.9 / 26	9.52 / 15.9 / 26
Piping Length (Maximum)			m	50	75	75
Max. internut level difference			m	30	30	30