





FDKS-C / RKS-D CDKS-C / MKS-D

Slim concealed ceiling unit

CDKS25,35,50,60C

RKS25,35D

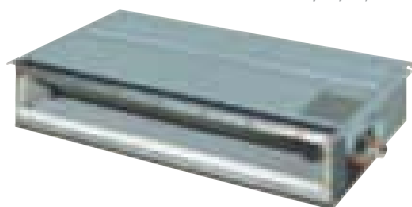

- Slim design for flexible installation
- Compact dimensions: can easily be mounted in a ceiling void of only 240 mm
- Blends unobtrusively with any interior décor
- Can be installed in both new and existing buildings
- Leaves maximum floor and wall space for furniture, decorations and fittings
- Powerful mode can be selected for rapid cooling
- The home leave operation saves energy during absence

- Standard suction filter: removes airborne dust particles to ensure a steady supply of clean air
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)
- Medium external static pressure facilitates unit use with flexible ducts of varying lengths



COOLING ONLY

			NEW	NEW		
INDOOR UNIT			FDKS25CVMB	FDKS35CVMB	CDKS50CVMB	CDKS60CVMB
Cooling capacity	min ~ nom ~ max	kW	13 ~ 24 ~ 3.0	14 ~ 34 ~ 3.8	For more detailed information about capacities, power input, EER and annual energy consumption, please refer to our Multi Model catalogue/combination tables or check with your local dealer	
Nominal input	min ~ nom ~ max	kW	0.30 ~ 0.845 ~ 1.06	0.30 ~ 1.30 ~ 1.455		
EER			2.84	2.62		
Energy label			C	D		
Annual energy consumption	cooling	kWh	423	650		
Dimensions	HxWxD	mm	200x900x620		200x900x620	200x1100x620
Weight		kg	25		27	30
Air flow rate	H/L/SL	m ³ /min	9.5 ~ 8.0 ~ 6.7	10.0 ~ 8.5 ~ 7.0	12.0/10.0/8.4	16.0/13.5/11.2
Sound pressure level	H/L/SL	dB(A)	35/31/29	35/31/29	37/33/31	38/34/32
Sound power level	H	dB(A)	53	53	55	56
Refrigerant type			R-410A		R-410A	
Power supply		VM	1 ~, 220-240/220-230V, 50/60Hz		1 ~, 220-240/220-230V, 50/60Hz	
Infrared remote control			ARC433A8		ARC433A8	

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).
 3) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.

			NEW			
OUTDOOR UNIT			RKS25DVMB	RKS35DVMB	4MKS58,75,90DVMB	
Dimensions	HxWxD	mm	550x765x285			
Weight		kg	30			
Sound pressure level	H/L	dB(A)	46/43	47/44	Multi application only. For more specifications please refer to page 98 of this catalogue	
Sound power level	H	dB(A)	61	61		
Operation range	from ~ to	°CDB	-10 ~ 46			
Refrigerant type			R-410A			
Power supply		VM	1 ~, 220-240/220-230V, 50/60Hz			