

Air Conditioners

Heating & Cooling

SkyAir

Concealed ceiling unit with inverter driven fan

- » Complete range of models for commercial applications
- » Discretely concealed in ceiling
- » Automatic airflow adjustment to nominal airflow rate
- » Reduced power consumption thanks to DC inverter fans



www.daikin.eu



FBQ-C8 / FDQ-C



FDQ-B



Replacement technology

SEER up to **A⁺⁺**



Concealed ceiling unit for discrete installation and optimum efficiency and comfort

Daikin concealed units fit discretely in the ceiling, with only the discharge and suction grilles visible. Customers and guests are assured of whisper-quiet comfort, and as part of the Daikin seasonal efficiency line-up, Daikin concealed ceiling units meet tomorrow's stricter energy requirements today. So businesses like yours with long running hours and high air conditioning loads can enjoy the lower operating costs and increased comfort of tomorrow's technology, today.

Europe's energy label: raising the bar on energy efficiency.

To inform consumers concerning energy performance standards, Europe has introduced a new energy label. This label allows end-users to make even better informed choices, since seasonal efficiency reflects air conditioner efficiency over an entire season. The energy label includes multiple classifications from A+++ to D. Information includes not only seasonal efficiency ratings for heating (SCOP) and cooling (SEER), but also annual energy consumption and sound levels.



Efficiency leads across the board

› Inverter control for optimum efficiency and comfort

Because an inverter monitors and adjusts ambient temperature whenever needed, energy consumption drops by 30% compared to a traditional on/off system (non inverter). Daikin concealed ceiling units use inverters that allow the DC fan motor to efficiently operate at the precise speed required to maintain comfort. Daikin is a pioneer in the application of inverters to air conditioning.



› Combining highest efficiency and year-round comfort with a heat pump system

Air-to-air heat pumps obtain 75% of their output energy from renewable sources: the ambient air, which is both renewable and inexhaustible. Of course, heat pumps also require electricity to run the system, but increasingly this electricity can also be generated from renewable energy sources (solar energy, wind energy, hydropower, biomass).

› Energy saving functions via wired controller

An enhanced **wired controller** (BRC1E52A/B) gives you access to the full functionality of the concealed ceiling unit. There are three programmable schedules (e.g. winter, summer, mid-season) plus a holiday function to disable the schedule timer. Each schedule can contain up to five actions per day.

Controller features:

- › Temperature range limit
- › Improved setback function
- › Off timer
- › 3 weekly timers



Wired remote control
BRC1E52A/B (optional)

Perfect comfort for your customers and guests

› **Whisper quiet**

With sound levels **down to 29dBA** (the level of rustling leaves), your customers and visitors can attend to their business undisturbed.

› **Blends with any interior**

The units are discretely concealed in the ceiling with only the suction and discharge grilles visible. No floor or wall space is needed. Decorative grilles are available to match a range of ceilings.

› **Optimum comfort in all situations**

Optimum comfort in all situations is ensured thanks to 3-step airflow control. You can easily adjust airflow via the optional wired remote controller.



Quick and easy installation for a broad range of applications

› **Fits in rooms with no or narrow ceilings**



The units fit flush in **lowered ceilings**

› **Ideal for use in small and large areas**


- Wide range of capacities from 3.4kW, ideal for small or well-insulated room as to 26.4kW for larger areas.
- From 30Pa up to 250Pa external static pressure allows flexible application and extensive ductwork runs.
- Air discharge grilles can be installed separately from the main unit for application in **irregularly shaped rooms** (e.g. L-shaped, U-shaped or long room).

› **Quicker installation**

- Fewer duct calculations are needed
- Automatic airflow adjustment via the optional remote controller eliminates the need for manual duct adjustments to obtain optimum performance
- Drain pump is standard

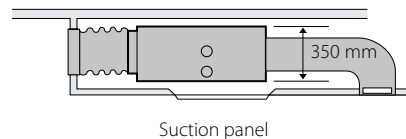


L-shaped room



U-shaped room

① Suction grille

② Discharge grille (field supply)
of the flexible ducts






Long room

Cool or heat up small to large applications with a single outdoor unit

A single multi outdoor unit can power up to nine indoor units in different rooms. The climate of each room is individually controlled. This assures top efficiency and optimum comfort for each separate space. For long or irregularly shaped rooms you can use multiple indoor units powered by a single outdoor unit. All indoor units are controlled at the same time.


Sky Air concealed ceiling units - Perfect for light commercial applications

APPLICATION	MODEL	PRODUCT NAME	PACKSHOT	ESP - HIGH (PA)	AIR FLOW RATE - HIGH (M³/MIN)	REQUIRED CEILING VOID (MM)	25	35	50	60	71	100	125	140	200	250
Medium static pressure	Concealed ceiling unit with inverter driven fan	FBQ-C8		100-120	16 - 41	350										
High static pressure	Large concealed ceiling unit	FDQ-C		200	39	350										
	Large concealed ceiling unit	FDQ-B		250	69 - 89	450										



Heating & Cooling

SkyAir Perfect for light commercial applications

INDOOR UNIT				FBQ35C8		FBQ50C8		FBQ60C8	
Cooling capacity	Min./Nom./Max.		kW	1.4/3.40/3.9		1.7/5.0/5.3		1.7/5.7/6.5	
Heating capacity	Min./Nom./Max.		kW	1.3/4.00/5.0		1.7/5.5/6.0		1.7/7.0/8.0	
Power input	Cooling	Min./Nom./Max.	kW	0.490/1.060/1.490		-1.650/-		-1.750/-	
	Heating	Min./Nom./Max.	kW	0.270/1.110/1.760		-1.610/-		-2.050/-	
Seasonal efficiency (according to EN14825) 	Cooling	Energy label				A+			
		Pdesign	kW	3.50		4.90		5.70	
		SEER		5.97		5.85		5.72	
		Annual energy consumption	kWh	205		293		349	
	Heating (Average climate)	Energy label				A			
		Pdesign	kW	2.90		4.35		4.60	
		SCOP		3.93		3.85		3.80	
		Annual energy consumption	kWh	1,033		1,584		1,693	
	Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3.21		3.03		3.26	
		COP		3.60		3.42		3.41	
Annual energy consumption		kWh	530		825		875		
Energy label		Cooling/Heating	A/A		B/B		A/B		
Casing	Colour			Not painted (galvanised)					
Dimensions	Unit	HeightxWidthxDepth	mm	300x700x700		350		300x1,000x700	
Required ceiling void >			mm			350			
Weight	Unit		kg	25				34	
Decoration panel	Model			BYBS45DJW1				BYBS71DJW1	
	Colour			White (10Y9/0.5)					
	Dimensions	HeightxWidthxDepth	mm	55x800x500				55x1,100x500	
	Weight			kg	3				4.5
Fan - Air flow rate	Cooling	High/Low	m³/min	16/11				18/15	
	Heating	High/Low	m³/min	16/11				18/15	
Fan - External static pressure	High/Nom.		Pa			100/30			
Sound power level	Cooling		dBA	63				57	
Sound pressure level	Cooling	High/Low	dBA			37/29			
	Heating	High/Low	dBA			37/29			
Piping connections	Liquid	OD	mm			6.35			
	Gas	OD	mm	9.5				12.7	
Power supply	Phase / Frequency / Voltage		Hz / V			1~ / 50/60 / 220-240/220			


OUTDOOR UNIT					RXS35L		RXS50L		RXS60L	
Dimensions	Unit	HeightxWidthxDepth		mm	550x765x285		735x825x300			
Weight	Unit			kg	34		47		48	
Fan - Air flow rate	Cooling	High/Super low		m³/min	36.0/30.1		50.9/48.9		50.2/45.0	
	Heating	High/Super low		m³/min	28.3/25.6		45.0/43.1		46.3/46	
Sound power level	Cooling			dBA	61		62			
	Heating			dBA	61		62			
Sound pressure level	Cooling	High/Low/Silent operation		dBA	48/-/44		48/44/-		49/46/-	
	Heating	High/Low/Silent operation		dBA	48/-/45		48/45/-		49/46/-	
Operation range	Cooling	Ambient	Min.~Max.	°CDB			-10~46			
	Heating	Ambient	Min.~Max.	°CWB			-15~18			
Refrigerant	Type/GWP				R-410A/1,975					
Piping connections	Piping length	OU - IU	Max.	m	20		30			
	Level difference	IU - OU	Max.	m	15		20.0			
Power supply	Phase / Frequency / Voltage			Hz / V	1~ / 50 / 220-240		1~ / 50 / 220-230-240			
Current - 50Hz	Maximum fuse amps (MFA)			A			-			

(1) EER/COP according to Eurovent 2012, for use outside EU only

Heating & Cooling

SkyAir Perfect for light commercial applications

Seasonal Smart

INDOOR UNIT				FBQ71C8	FBQ100C8	FBQ125C8	FBQ140C8	FBQ71C8	FBQ100C8	FBQ125C8	FBQ140C8						
Cooling capacity	Min./Nom./Max.		kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-						
Heating capacity	Min./Nom./Max.		kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-						
Power input	Cooling	Nom.	kW	1.94	2.44	3.15	4.02	1.94	2.44	3.15	4.02						
	Heating	Nom.	kW	2.05	2.57	3.53	4.30	2.05	2.57	3.53	4.30						
<div></div> Seasonal efficiency (according to EN14825)	Cooling	Energy label		A++		A+		-		A++		A+		-			
		Pdesign		kW	6.80	9.50	12.00	-		6.80	9.50	12.00	-				
		SEER			6.11	5.80	5.81	-		6.11	5.80	5.81	-				
		Annual energy consumption		kWh	389	573	722	-		389	573	722	-				
	Heating (Average climate)	Energy label		A+		A++		A+		-		A+		A++		A+	
		Pdesign		kW	6.00	11.30	12.71	-		6.00	11.30	12.71	-				
		SCOP			4.01	4.61	4.21	-		4.01	4.61	4.21	-				
		Annual energy consumption		kWh	2,094	3,431	4,226	-		2,094	3,431	4,226	-				
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.50	3.89	3.81	3.33	3.50	3.89	3.81	3.33						
	COP			3.65	4.21	3.83	3.61	3.65	4.21	3.83	3.61						
	Annual energy consumption		kWh	970	1,220	1,575	2,010	970	1,220	1,575	2,010						
	Energy label		Cooling/Heating	A/A				-	A/A				-				
Casing	Colour			Not painted (galvanised)													
Dimensions	Unit	HeightxWidthxDepth		mm	300x1,000x700		300x1,400x700		300x1,000x700		300x1,400x700						
Required ceiling void >				mm	350												
Weight	Unit			kg	34	45			34	45							
Decoration panel	Model				BYBS71DJW1		BYBS125DJW1		BYBS71DJW1		BYBS125DJW1						
	Colour				White (10Y9/0.5)												
	Dimensions	HeightxWidthxDepth		mm	55x1,100x500		55x1,500x500		55x1,100x500		55x1,500x500						
	Weight			kg	4.5		6		4.5		6						
Fan - Air flow rate	Cooling	High/Low	m³/min	18/15	32/23	39/28		18/15	32/23	39/28							
	Heating	High/Low	m³/min	18/15	32/23	39/28	41/29	18/15	32/23	39/28	41/29						
Fan - External static pressure	High/Nom.			Pa	100/30	120/40	120/50		100/30	120/40	120/50						
Sound power level	Cooling			dBA	57	61	66		57	61	66						
Sound pressure level	Cooling	High/Low	dBA	37/29	38/32	40/33		37/29	38/32	40/33							
	Heating	High/Low	dBA	37/29	38/32	40/33	41/34	37/29	38/32	40/33	41/34						
Piping connections	Liquid	OD	mm	9.52													
	Gas	OD	mm	15.9													
Power supply	Phase / Frequency / Voltage			Hz / V	1 ~ / 50/60 / 220-240/220												

OUTDOOR UNIT					RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG140L7V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1					
Dimensions	Unit	HeightxWidthxDepth			mm	990x940x320			1,430x940x320			990x940x320	1,430x940x320				
Weight	Unit				kg	78			102			80	101				
Fan - Air flow rate	Cooling	Nom.			m³/min	59			70		84		59	70		84	
	Heating	Nom.			m³/min	49			62			49			62		
Sound power level	Cooling				dBA	64			66	67	69	64	66	67	69		
Sound pressure level	Cooling	Nom.			dBA	48			50	51	52	48	50	51	52		
	Heating	Nom.			dBA	50			52	53			50	52	53		
	Night quiet mode	Level 1			dBA	43			45			43			45		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15~-50 -20~-15.5												
	Heating	Ambient	Min.~Max.	°CWB													
Refrigerant	Type/GWP				R-410A/1,975												
Piping connections	Piping length	OU - IU	Max.	m	50			75			50			75			
		System	Equivalent	m	70			90			70			90			
	Level difference	IU - OU	Max.	m	30.0												
		IU - IU	Max.	m	0.5												
Power supply	Phase / Frequency / Voltage				Hz / V		1 ~ / 50 / 220-240				3N~ / 50 / 380-415						
Current - 50Hz	Maximum fuse amps (MFA)				A		20		32		16		20				

(1) EER/COP according to Eurovent 2012, for use outside EU only



Heating & Cooling

SkyAir Perfect for light commercial applications

Seasonal Classic

INDOOR UNIT				FBQ71C8	FBQ100C8	FBQ125C8	FBQ140C8	FBQ100C8	FBQ125C8	FBQ140C8
Cooling capacity	Min./Nom./Max.	kW		-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/9.5/-	-/12.0/-	-/13.4/-
Heating capacity	Min./Nom./Max.	kW		-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/10.8/-	-/13.5/-	-/15.5/-
Power input	Cooling	Nom.	kW	2.07	2.87	3.74	4.44	2.87	3.74	4.44
	Heating	Nom.	kW	2.08	2.96	3.85	4.54	2.96	3.85	4.54
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A+	A		-	A		-
		Pdesign	kW	6.80	9.50	12.00	-	9.50	12.00	-
		SEER		5.81	5.50	5.20	-	5.50	5.20	-
		Annual energy consumption	kWh	410	604	807	-	604	807	-
	Heating (Average climate)	Energy label		A	A+		-	A+		-
		Pdesign	kW	6.00	7.60		-	7.60		-
		SCOP		3.88	4.01	3.90	-	4.01	3.90	-
		Annual energy consumption	kWh	2,166	2,653	2,728	-	2,653	2,728	-
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.28	3.31	3.21	3.02	3.31	3.21	3.02
	COP			3.61	3.65	3.51	3.41	3.65	3.51	3.41
	Annual energy consumption	kWh		1,035	1,435	1,870	2,220	1,435	1,870	2,220
	Energy label	Cooling/Heating		A/A		A/B	-	A/A	A/B	-
Casing	Colour			Not painted (galvanised)						
Dimensions	Unit	HeightxWidthxDepth	mm	300x1,000x700						
Required ceiling void >			mm	350						
Weight	Unit		kg	34						
Decoration panel	Model			BYBS71DJW1						
	Colour			White (10Y9/0.5)						
	Dimensions	HeightxWidthxDepth	mm	55x1,100x500						
	Weight		kg	4.5						
Fan - Air flow rate	Cooling	High/Low	m³/min	18/15	32/23	39/28		32/23	39/28	
	Heating	High/Low	m³/min	18/15	32/23	39/28	41/29	32/23	39/28	41/29
Fan - External static pressure	High/Nom.		Pa	100/30	120/40	120/50		120/40	120/50	
Sound power level	Cooling		dBA	57	61	66		61	66	
Sound pressure level	Cooling	High/Low	dBA	37/29	38/32	40/33		38/32	40/33	
	Heating	High/Low	dBA	37/29	38/32	40/33	41/34	38/32	40/33	41/34
Piping connections	Liquid	OD	mm	9.52						
	Gas	OD	mm	15.9						
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50/60 / 220-240/220						

(1) The sound pressure values are mentioned for a unit installed with rear suction.

OUTDOOR UNIT				RZQSG71L3V1	RZQSG100L8V1	RZQSG125L8V1	RZQSG140L1V1	RZQSG100L8Y1	RZQSG125L8Y1	RZQSG140LY1
Dimensions	Unit	HeightxWidthxDepth		mm	770x900x320		990x940x320		1,430x940x320	
Weight	Unit			kg	67		81		102	
Fan - Air flow rate	Cooling	Nom.		m³/min	52		76		77	
	Heating	Nom.		m³/min	48		83		62	
Sound power level	Cooling			dBA	65		69		70	
Sound pressure level	Cooling	Nom./Silent operation		dBA	49/47		53/49		54/-	
	Heating	Nom.		dBA	51		57		58	
	Night quiet mode	Level 1		dBA					49	
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-15~46					
	Heating	Ambient	Min.~Max.	°CWB	-15~-15.5					
Refrigerant	Type/GWP			R-410A/1,975						
Piping connections	Piping length	OU - IU	Max.	m	50					
		System	Equivalent	m	40		70			
	Level difference	IU - OU	Max.	m	30					
		IU - IU	Max.	m	0.5					
Power supply	Phase / Frequency / Voltage			Hz / V	1 ~ / 50 / 220-240				3N~ / 50 / 380-415	
Current - 50Hz	Maximum fuse amps (MFA)			A	20		32		20	

(1) EER/COP according to Eurovent 2012, for use outside EU only



FBQ100-140C8



RZQ100-125L8V1/Y1
RZQ140L7V1/LY1



BRC1E52A/B (optional)
BRC4C65 (optional)



Home leave operation



Fan only



auto-cooling heating changeover



Fan speed 3 steps



Dry programme



Air filter



Weekly timer



Wired remote control



Centralised control



Auto restart



Self diagnosis



Drain pump kit




twin/triple/double twin

Heating & Cooling

SkyAir

Perfect for light commercial applications

INDOOR UNIT				FDQ125C	FDQ125C	FDQ125C	FDQ125C	
Cooling capacity	Min./Nom./Max.		kW	-/12.0/-				
Heating capacity	Min./Nom./Max.		kW	-/13.5/-				
Power input	Cooling	Nom.	kW	3.20			3.74	
	Heating	Nom.	kW	3.53			3.85	
<div></div> Seasonal efficiency (according to EN14825)	Cooling	Energy label		A+			A	
		Pdesign		kW		12.00		
		SEER			5.81		5.20	
		Annual energy consumption		kWh	722		807	
	Heating (Average climate)	Energy label		A+			A	
		Pdesign		kW	12.71			7.60
		SCOP			4.21			3.90
		Annual energy consumption		kWh	4,226			2,728
	Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.75			3.21
		COP			3.83			3.51
Annual energy consumption		kWh	1,600			1,870		
Energy label		Cooling/Heating		A/A			A/B	
Casing	Colour		Not painted (galvanised)					
Dimensions	Unit	HeightxWidthxDepth	mm	300x1,400x700				
Required ceiling void >			mm	350				
Weight	Unit		kg	45				
Decoration panel	Model		BYBS125DJW1					
	Colour		White (10Y9/0.5)					
	Dimensions	HeightxWidthxDepth	mm	55x1,500x500				
	Weight		kg	6.5				
Fan - Air flow rate	Cooling	High/Low	m³/min	39/28				
	Heating	High/Low	m³/min	39/28				
Fan - External static pressure	High/Nom.		Pa	200/50				
Sound power level	Cooling		dBA	66				
Sound pressure level	Cooling	High/Low	dBA	40/33				
	Heating	High/Low	dBA	40/33				
Piping connections	Liquid	OD	mm	9.52				
	Gas	OD	mm	15.9				
Power supply	Phase / Frequency / Voltage		Hz / V	1 ~ / 50/60 / 220-240/220				

(1) EER/COP according to Eurovent 2012 (2) The sound pressure values are mentioned for a unit installed with rear suction

OUTDOOR UNIT					RZQG125L8V1	RZQG125L8Y1	RZQSG125L8V1	RZQSG125L8Y1
Dimensions	Unit	HeightxWidthxDepth	mm		1,430x940x320		990x940x320	
Weight	Unit		kg		102	101	81	82
Fan - Air flow rate	Cooling	Nom.	m³/min		70		77	
	Heating	Nom.	m³/min		62		83	
Sound power level	Cooling		dBA		67		70	
Sound pressure level	Cooling	Nom./Silent operation	dBA		51/-		54/49	54/-
	Heating	Nom.	dBA		53		58	
	Night quiet mode	Level 1	dBA		45		-	49
Operation range	Cooling	Ambient	Min.-Max.	°CDB	-15~50		-15~46	
	Heating	Ambient	Min.-Max.	°CWB	-20~15.5		-15~15.5	
Refrigerant	Type/GWP	R-410A/1,975						
Piping connections	Piping length	OU - IU	Max.	m	75		50	
		System	Equivalent	m	90		70	
	Level difference	IU - OU	Max.	m	30.0			
		IU - IU	Max.	m	0.5			
Power supply	Phase / Frequency / Voltage		Hz / V		1~ / 50 / 220-240	3N~ / 50 / 380-415	1~ / 50 / 220-240	3N~ / 50 / 380-415
Current - 50Hz	Maximum fuse amps (MFA)		A		32	20	32	20

(1) EER/COP according to Eurovent 2012, for use outside EU only




FDQ125C



RZQG125L8V1/LY1



BRC1E52A/B (optional)



Heating & Cooling

SkyAir Perfect for light commercial applications



INDOOR UNIT				FDQ200B	FDQ250B
Cooling capacity	Min./Nom./Max.		kW	-/20.0/-	-/24.1/-
Heating capacity	Min./Nom./Max.		kW	-/23.0/-	-/26.4/-
Power input	Cooling	Nom.	kW	6.23	8.58
	Heating	Nom.	kW	6.74	8.22
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.21	2.81
	COP			3.41	3.21
Annual energy consumption at 7°/20° nominal load	Annual energy consumption		kWh	3,115	4,290
	Energy label		Cooling/Heating	-/-	
Casing	Colour			Unpainted	
Dimensions	Unit	HeightxWidthxDepth	mm	450x1,400x900	
Required ceiling void >				450	
Weight	Unit			89.0	94.0
Fan - Air flow rate	Cooling	Nom.	m³/min	69.0	89.0
	Heating	Nom.	m³/min	69.0	89.0
Fan - External static pressure	High/Nom./Low			250/250/250	
Sound power level	Cooling			81	82
Sound pressure level	Cooling	High	dB(A)	45.0	47.0
	Heating	Low	dB(A)	45.0	47.0
Piping connections	Liquid	OD	mm	9.52	12.7
	Gas	OD	mm	22.2	
Power supply	Phase / Frequency / Voltage			1~ / 50 / 230	

OUTDOOR UNIT				RZQ200C	RZQ250C
Dimensions	Unit	HeightxWidthxDepth	mm	1,680x930x765	
Weight	Unit			183	184
Fan - Air flow rate	Cooling	Nom.	m³/min	171	171
	Heating	Nom.	m³/min	171	171
Fan - External static pressure	Max.			78	78
Sound power level	Cooling			78	78
	Heating			78	78
Sound pressure level	Nom.			57	57
Operation range	Cooling	Ambient	Min.-Max. °CDB	-5.0~46.0	
	Heating	Ambient	Min.-Max. °CWB	-15.0~15.0	
Refrigerant	Type/GWP			R-410A/1,975	
Piping connections	Piping length	OU - IU	Max. m	100	
Power supply	Level difference			-	
	IU - OU			-	
Current - 50Hz	Phase / Frequency / Voltage			3N~ / 50 / 380-415	
	Maximum fuse amps (MFA)			20	

(1) EER/COP according to Eurovent 2012, for use outside EU only



FDQ200-250B



RZQ200-250C



BRC1E52A/B
(optional)

Daikin has a worldwide reputation based on 90 years' experience in the successful manufacture of high quality air conditioning equipment for residential, commercial and industrial use and 56 years as a leader in heat pump technology.

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com



Daikin products are distributed by:

FSC

ECPEN14-102