



FLXS-B/RXS-D/E

Flexi type unit




FLXS50,60B



RXS50E

- Can be fitted on either ceiling or lower part of wall (e.g. beneath a window)
- Consumes up to 30% less energy than non-inverter units
- Washable grille
- Achieves set temperature more quickly
- Automatic air flow director ensures uniform air flow and temperature distribution
- Home leave operation saves energy during absence

- Air purification and photocatalytic deodorising filter
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

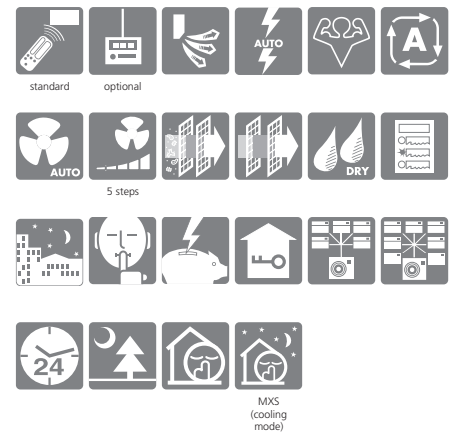

HEAT PUMP

INVERTER

INDOOR UNIT (air cooled)				FLXS25B	FLXS35B	FLXS50B	FLXS60B
Cooling capacity		min ~ nom ~ max	kW	13 ~ 25 ~ 3.0	14 ~ 35 ~ 3.8	0.90 ~ 4.90 ~ 5.30	For more detailed information about capacities, power input, EER/COP, Energy label and annual energy consumption, please refer to our Multi Model catalogue/combination tables or check with your local dealer.
Heating capacity		min ~ nom ~ max	kW	13 ~ 3.4 ~ 4.5	14 ~ 4.0 ~ 5.0	0.90 ~ 6.10 ~ 7.50	
Nominal input	cooling	min ~ nom ~ max	kW	0.30 ~ 0.78 ~ 0.96	0.30 ~ 1.16 ~ 1.27	0.45 ~ 1.72 ~ 1.95	
	heating	min ~ nom ~ max	kW	0.29 ~ 1.00 ~ 1.50	0.31 ~ 1.25 ~ 1.86	0.31 ~ 1.82 ~ 3.54	
EER	cooling			3.21	3.02	2.85	
COP	heating			3.42	3.21	3.35	
Energy label	cooling			A	B	C	
	heating			B	C	C	
Annual energy consumption	cooling		kWh	390	580	860	
Dimensions		HxWxD	mm	490x1,050x200			
Weight			kg	16			
Air flow rate	cooling	H/L/SL	m ³ /min	7.6/6.0/5.2	8.6/6.6/5.6	11.4/8.5/7.5	12.0/9.3/8.3
	heating	H/L/SL	m ³ /min	9.2/7.4/6.6	9.8/8.0/7.2	12.1/7.5/6.8	12.8/8.4/7.5
Sound pressure level	cooling	H/L/SL	dB(A)	37/31/28	38/32/29	47/39/36	48/41/39
	heating	H/L/SL	dB(A)	37/31/29	39/33/30	46/35/33	47/37/34
Sound power level	cooling	H	dB(A)	53	54	63	64
Refrigerant type				R-410A			
Power supply				1 ~, 220-240/220-230V, 50/60Hz			
Infrared remote control	VM			ARC433AS			

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

new ↗

new ↗

OUTDOOR UNIT				RXS25D	RXS35D	RXS50E	4MXS68,80/5MXS90E/RMXS112,140,160EV
Dimensions		HxWxD	mm	550x765x285		735x825x300	Multi application only. For more specifications please refer to page 89 and 92 of this catalogue
Weight			kg	30		48	
Sound pressure level	cooling	H/L	dB(A)	46/43		47/44	
	heating	H/L	dB(A)	47/44		48/45	
Sound power level	cooling	H	dB(A)	61		61	
	heating	H	dB(A)	61		61	
Operation range	cooling	from ~ to	°CDB	-10 ~ 46		-10 ~ 46	
	heating	from ~ to	°CWB	-15 ~ 20		-15 ~ 18	
Refrigerant type				R-410A		R-410A	
Power supply	VM/V1			1 ~, 220-240/220-230V, 50/60Hz		1 ~, 220-240, 50Hz	
Piping connections	liquid/gas		mm	ø6.4/ø9.5		ø6.4/ø12.7	
Max. piping length/Max. level difference				20/15		30/20	

* This information was not available at the time of publication.