



FLXS-B / RXS-E

Flexi type unit



ARC 433A6



FLXS 25,35B




FLXS 25,35B



RXS 25,35E

- Can fit on either ceiling or lower wall. Its low height enables it to fit beneath a window
- Consumes up to 30% less energy than non-inverter units
- Washable front panel
- Reaches set temperature more quickly
- Auto-swing function ensures efficient air and temperature distribution.
- Home leave operation saves energy during absence
- Air purification and photocatalytic deodorising filter
- Powerful mode can be selected for rapid cooling or heating
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)

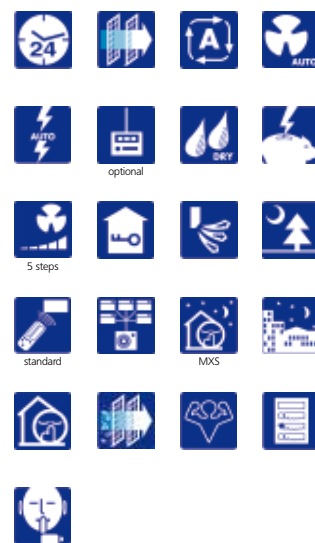

HEAT PUMP

INVERTER

Indoor Units				FLXS25BAVMB	FLXS35BAVMB
Nominal Capacity	Cooling capacity	Minimum	kW	1.2	1.2
		Standard	kW	2.5	3.5
		Maximum	kW	3.0	3.8
	Heating capacity	Minimum	kW	1.2	1.4
		Standard	kW	3.4	4.0
		Maximum	kW	4.5	5.0
Annual energy consumption			kWh	325	565
EER / COP	Cooling / Heating			3.85 / 3.47	3.10 / 3.25
Energy Label	cooling / heating			A / B	B / C
Dimensions	(Height x Width x Depth)		mm	490x1050x200	490x1050x200
Weight			kg	16.0	16.0
Air Flow Rate	Cooling	H/M/L/SL	m ³ /min	7.60 / 6.80 / 6.00 / 5.2	8.60 / 7.60 / 6.60 / 5.6
	Heating	H/M/L/SL	m ³ /min	9.20 / 8.30 / 7.40 / 6.6	9.80 / 8.90 / 8.00 / 7.2
Sound Power	Cooling	High	dBA	53.0	54.0
	Heating	High	dBA	-	-
Sound Pressure	Cooling	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 28.0	38.0 / 35.0 / 32.0 / 29.0
	Heating	H/M/L/SL	dBA	37.0 / 34.0 / 31.0 / 29.0	39.0 / 36.0 / 33.0 / 30.0
Refrigerant			Type	R-410A	R-410A
Power Supply				1~/220-240/220-230V/50/60Hz	1~/220-240/220-230V/50/60Hz

Outdoor Unit				RXS25E2V1B	RXS35E2V1B
Dimensions	(Height x Width x Depth)		mm	550x765x285	550x765x285
Weight			kg	32	32
Sound pressure level	Cooling	H/L	dBA	46 / 43	47 / 44
	Heating	H/L	dBA	47 / 44	48 / 45
Sound power level	Cooling	H	dBA	61	62
Operation Range	Cooling	Min~Max	°CDB	-10~-46	-10~-46
	Heating	Min~Max	°CWB	-15~-20	-15~-20
Refrigerant			Type	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas/Drain		mm	6.35 / 9.5 / 18	6.35 / 9.5 / 18
Piping Length (Maximum)			m	20	20
Max. internunit level difference			m	15	15



FLXS-B / RXS-F

Flexi type unit



ARC433A6



FLXS50B




FLXS50B



RXS50F

- Can fit on either ceiling or lower wall. Its low height enables it to fit beneath a window
- Consumes up to 30% less energy than non-inverter units
- Washable front panel
- Reaches set temperature more quickly
- Auto-swing function ensures efficient air and temperature distribution.
- Home leave operation saves energy during absence
- Air purification and photocatalytic deodorising filter
- Powerful mode can be selected for rapid cooling or heating
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)

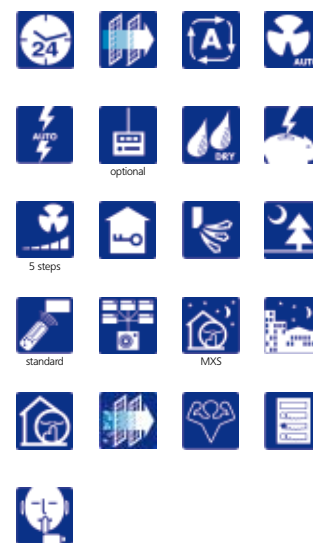

HEAT PUMP

Indoor Units			
Nominal Capacity	Cooling capacity	Minimum	kW
		Standard	kW
		Maximum	kW
Heating capacity	Minimum	Minimum	kW
		Standard	kW
		Maximum	kW
EER / COP	Cooling / Heating		2.85 / 3.35
Annual energy consumption			kWh
Energy Label	cooling / heating		C / C
Dimensions	(Height x Width x Depth)		mm
Weight			kg
Air Flow Rate	Cooling	H/M/L/SL	m ³ /min
	Heating	H/M/L/SL	m ³ /min
Sound Power	Cooling	High	dBA
	Heating	High	dBA
Sound Pressure	Cooling	H/M/L/SL	dBA
	Heating	H/M/L/SL	dBA
Refrigerant			Type
Power Supply			

INVERTER

FLXS50B/AVMB			
			1.7
			4.9
			5.3
			1.7
			6.1
			7.5
			2.85 / 3.35
			860
			C / C
			490x1050x200
			17.0
			11.40 / 10.00 / 8.50 / 7.6
			12.1 / 9.8 / 7.5 / 6.8
			63.0
			62.0
			47.0 / 43.0 / 39.0 / 36.0
			46.0 / 41.0 / 35.0 / 33.0
			R-410A
			1~/220-240/220-230V/50/60Hz

Outdoor Unit			
Dimensions	(Height x Width x Depth)		mm
Weight			kg
Sound pressure level	Cooling	H/SL	dBA
	Heating	H/SL	dBA
Sound power level	Cooling	H	dBA
Operation Range	Cooling	Min~Max	°CDB
	Heating	Min~Max	°CWB
Refrigerant			Type
Power Supply			
Piping connections	Liquid (OD)/Gas/Drain		mm
Piping Length (Maximum)			m
Max. internunit level difference			m

RXS50F2V1B			
			735x825x300
			48
			47 / 44
			48 / 45
			61
			-10~46
			-15~18
			R-410A
			1~/220-240V/50Hz
			6.35 / 12.7 / 20
			30
			20