



Vertical chassic unit
Requires little installation space

FNQ-A

The FNQ range is designed to be concealed in walls, offering a quiet and efficient air conditioning solution

Installation

The low height of the FNQ-A allows it to fit beneath a window. It's narrow depth of 200mm means it requires little installation space if installed within a wall void. This kind of application is perfect for residential applications, with only the discharge and suction grilles visible.

Connectivity

The FNQ range is versatile & can be installed in a variety of applications:

- > Individual rooms, when paired with an RXS outdoor unit
- > As part of a multi-room house or apartment, when connected to an MXS outdoor. This application can have up-to 5 rooms, with the indoor units being of different style and capacity
- > Large, or irregular sized rooms run, like offices, when connected as twin, triple or double twin connection with the Sky Air Smart, Classic or Super outdoor unit

INVERTER


SkyAir



BRC1E52A



RXS25-50

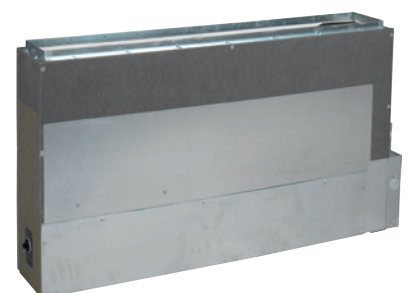

FNQ-A



FNQ-A

Features	Benefits
Slim casing	Width of only 200mm means the unit requires little space to be installed in wall voids
Low height	Total install height of 720mm allows unit to fit beneath windows in office type applications
Flexible installation	Front or bottom suction is possible, with unit mounted on floor (with factory fitted legs), or wall-hung (removing legs)
Low noise levels	Sound pressure down to 28dbA make the FNQ the quietest of it's type on the market
Versatile control	7 day timer, through hard-wired remote or an optional wireless remote controller. The FNQ can also be connected into Daikin centralised controller as part of a BMS

Indoor Units			FNQ25A	FNQ35A	FNQ50A	FNQ60A
Capacity	UK Total Cooling	kW	2.54	3.32	4.81	5.86
	UK Sensible Cooling	kW	1.89	2.26	3.08	3.97
	Nominal Cooling	kW	2.40	3.40	5.00	6.00
	Nominal Heating	kW	3.20	4.00	5.80	7.00
Seasonal Efficiency (EN14825) COOLING	Energy Label		A+	A+	A+	A
	Pdesign	kW	2.60	3.40	5.00	6.00
	SEER		5.63	5.65	5.72	5.51
	Annual Energy Consumption	kWh	162	211	306	381
Seasonal Efficiency (EN14825) HEATING	Energy Label		A+	A+	A+	A+
	Pdesign	kW	2.80	2.90	4.00	4.60
	SCOP		4.24	4.05	4.09	4.16
	Annual Energy Consumption	kWh	925	1002	1369	1548
Nominal Efficiency	EER / COP		3.77 / 4.00	3.06 / 3.48	3.35 / 3.34	2.68 / 3.11
	Energy Label		A / A	B / B	A / C	D / D
	Annual Energy Consumption	kWh	345	556	746	1119
Air Flow Rate	High / Low	m ³ /min	8.7 / 7.3		16 / 13.5	
External Static Pressure	High / Nominal	Pa	48 / 30		49 / 40	
Dimensions	Height	mm	620		620	
	Width	mm	750		1150	
	Depth	mm	200		200	
Weight		kg	23	23	30	30
Sound Pressure	High / Low	dBA	33 / 28	33 / 28	36 / 30	36 / 30
Sound Power		dBA	53	53	56	56

Outdoor Units			RXS25L3	RXS35L3	RXS50L	RXS60L
Dimensions	Height x Width x Depth	mm	550 x 765 x 285		735 x 825 x 300	
Weight		kg	34	34	47	48
Electrical Details	Power Supply		1ph			
	Running Current	A	3.90	4.90	7.10	9.20
	Starting Current	A	3.3	4.3	6.8	9.4
	Max Fuse Size	A	16	16	20	20
Interconnection Wiring	Core / Cable size		3+E / 1.5		3+E / 1.5	
Piping Connections	Liquid / Gas	inches	1/4 / 3/8	1/4 / 3/8	1/4 / 1/2	1/4 / 1/2
Pipework	Maximum Length	m	20	20	30	30
	Maximum Vertical Rise	m	15	15	20	20
	Precharged to	m	10	10	10	10
	Additional Charge	g/m	20			
	Holding Charge	kg	1.0	1.2	1.7	1.5
Sound Pressure	High	dBA	46	48	48	49
Sound Power		dBA	59	61	62	62

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com