




# FTS-B / RS-B

## Wall mounted unit



- Lightweight and compact
- Easily washable front panel
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling
- Energy efficient

- Automatic air flow director ensures uniform air flow and temperature distribution

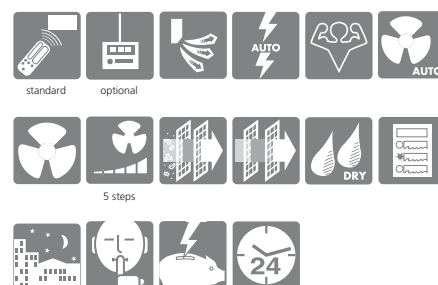

### COOLING ONLY

INDOOR UNIT				NON-INVERTER	
				FTS50BVM	FTS60BVM
Cooling capacity		nominal	kW	5.00	6.00
Nominal input	cooling	nominal	kW	1.66	2.12
EER				3.01	2.83
Energy label				8	C
Annual energy consumption			kWh	830	1,060
Dimensions		HxWxD	mm	290x795x230	290x1,050x230
Weight			kg	9	12
Air flow rate (H/L)	cooling		m <sup>3</sup> /min	115/8.3	164/11.6
Sound pressure level (H/L)	cooling		dB(A)	44/35	45/36
Sound power level (H)	cooling		dB(A)	63	63
Refrigerant type				R-410A	
Power supply			VM	1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz	
Infrared remote control				ARC433A24	

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).  
 2) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.  
 3) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT				RS50BVM	RS60BVM
Dimensions		HxWxD	mm	735x825x300	
Weight			kg	49	53
Sound pressure level (H/L)	cooling		dB(A)	47/*	49/*
Sound power level (H)	cooling		dB(A)	63	64
Operation range	cooling	from ~ to	°CDB	-10 ~ 46	
Refrigerant type				R-410A	
Power supply				1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz	

\* This information was not available at the time of publication.