FTYN-C / RYN-C

Wall mounted unit

FTYN20,25,35C

RYN20,25,35C

- Lightweight and compact
- Easily washable front panel
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling and/or heating
- Energy efficient
- Automatic air flow director ensures uniform air flow and temperature distribution

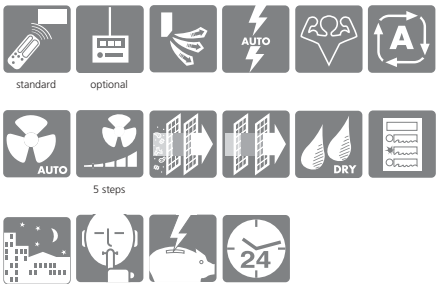

HEAT PUMP — NON-INVERTER

INDOOR UNIT				FTYN20CVMB	FTYN25CVMB	FTYN35CVMB
Cooling capacity		nominal	kW	2.00	2.25	3.15
Heating capacity		nominal	kW	2.60	2.85	3.60
Nominal input	cooling	nominal	kW	0.620	0.700	1.045
	heating	nominal	kW	0.760	0.835	1.055
EER				3.23	3.21	3.01
COP				3.42	3.41	3.41
Energy label	cooling			A	A	B
	heating			B	B	B
Annual energy consumption			kWh	310	350	523
Dimensions		HxWxD	mm	273x784x185		
Weight			kg	7.5		
Air flow rate (H/L)	cooling		m^3/min	7.7/*	7.7/*	7.7/*
	heating		m^3/min	7.8/*	7.8/*	8.1/*
Sound pressure level (H/L)	cooling		dB(A)	38/26	38/26	39/26
	heating		dB(A)	38/28	38/28	39/29
Sound power level (H)	cooling		dB(A)	56	56	57
	heating		dB(A)	56	56	57
Refrigerant type				R-410A		
Power supply			VM	1~, 220~240/220~230V, 50/60Hz		
Infrared remote control				ARC433A27		

Notes: 1) Energy label: scale from A (most efficiënt) to G (less efficiënt).
2) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.
3) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT				RYN20CVMB	RYN25CVMB	RYN35CVMB
Dimensions		HxWxD	mm	560x695x265		
Weight			kg	31		33
Sound pressure level (H/L)	cooling		dB(A)	46/*	46/*	48/*
	heating		dB(A)	47/*	47/*	48/*
Sound power level (H)	cooling		dB(A)	61	61	63
	heating		dB(A)	62	62	63
Operation range	cooling	from~to	°CDB	10~46		
	heating	from~to	°CWB	-10~20		
Refrigerant type				R-410A		
Power supply			VM	1~,220-240/220-230V, 50/60Hz		

* This information was not available at the time of publication.