




FTN-C / RN-C

Wall mounted unit



- Lightweight and compact
- Easily washable front panel
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling
- Energy efficient
- Home leave operation saves energy during absence

- Automatic air flow director ensures uniform air flow and temperature distribution

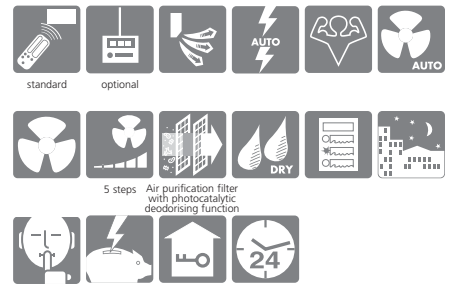

COOLING ONLY

NON-INVERTER

INDOOR UNIT (air cooled)			FTN20CVMB9	FTN25CVMB9	FTN35CVMB9
Cooling capacity	nominal	kW	2.00	2.25	3.15
Nominal input	nominal	kW	0.620	0.700	1.045
EER			3.23	3.21	3.01
Energy label			A	A	B
Annual energy consumption	cooling	kWh	310	350	523
Dimensions	HxWxD	mm		273x784x185	
Weight		kg		75	
Air flow rate	H/L	m ³ /min	77*	77*	77*
Sound pressure level	H/L	dB(A)	38/26	38/26	39/26
Sound power level	H	dB(A)	56	56	57
Refrigerant type				R-410A	
Power supply		VM		1~, 220~240/220~230V, 50/60Hz	
Infrared remote control				ARC433A24	

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.
 3) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT			RN20CVMB7	RN25CVMB7	RN35CVMB7
Dimensions	HxWxD	mm		560x695x265	
Weight		kg		31	33
Sound pressure level	H/L	dB(A)	46*	46*	48*
Sound power level	H	dB(A)	61	61	63
Operation range	from ~ to	°CDB		+10~46	
Refrigerant type				R-410A	
Power supply		VM		1~, 220~240/220~230V, 50/60Hz	

* This information was not available at the time of publication.