



FTN-D/RN-D

Wall mounted unit

new ➡




FTN25,35D



RN25,35D

- Lightweight and compact
- Easily washable front panel
- Powerful mode can be selected for rapid cooling
- Energy efficient
- Automatic air flow director ensures uniform air flow and temperature distribution

- Titanium apatite photocatalytic air purification filter: this filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses

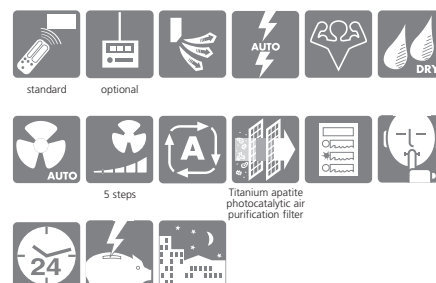

COOLING ONLY

INDOOR UNIT (air cooled)			NON-INVERTER	
			FTN25D	FTN35D
Cooling capacity	nominal	kW	2.5	3.15
Nominal input	nominal	kW	0.83	1.20
EER			3.01	2.63
Energy label			B	D
Annual energy consumption		kWh	415	600
Dimensions	HxVxD	mm	273x784x195	
Weight		kg	9	
Air flow rate	H/L	m ³ /min	7.5/4.6	7.5/4.9
Sound pressure level	H/L	dB(A)	39/27	39/29
Sound power level	H	dB(A)	57	
Refrigerant type			R-410A	
Power supply		V3	1~, 230V, 50Hz	
Infrared remote control			ARC445A3	

Notes:

1) Energy label: scale from A (most efficient) to G (less efficient).

2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT			RN25D	RN35D
Dimensions	HxVxD	mm	560x695x265	
Weight		kg	31	36
Sound pressure level	H	dB(A)	47	48
Sound power level	H	dB(A)	62	63
Operation range	from ~ to	°CDB	+15 ~ 46	
Refrigerant type			R-410A	
Power supply		V3	1~, 230V, 50Hz	
Piping connections	liquid/gas	mm	ø6.4/ø9.5	
Max. piping length/Max. level difference		m	15/10	