




FTYN-D/RYN-D

Wall mounted unit



FTYN25,35D

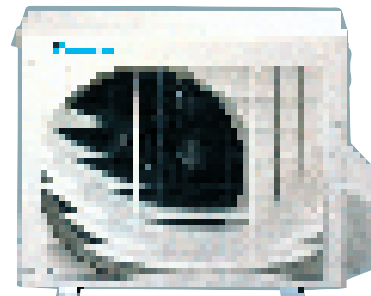

RYN25,35D

- Lightweight and compact
- Easily washable front panel
- Powerful mode can be selected for rapid cooling and/or heating
- Energy efficient
- Automatic air flow director ensures uniform air flow and temperature distribution

- Titanium apatite photocatalytic air purification filter: this filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses



HEAT PUMP

NON-INVERTER

INDOOR UNIT (air cooled)				FTYN25D	FTYN35D
Cooling capacity		nominal	kW	2.50	3.15
Heating capacity		nominal	kW	3.00	3.85
Nominal input	cooling		kW	0.83	1.20
	heating		kW	0.88	1.29
EER	cooling			3.01	2.63
COP	heating			3.41	2.98
Energy label	cooling			B	D
	heating			B	D
Annual energy consumption			kWh	415	600
Dimensions		HxWxD	mm	273x784x195	
Weight			kg	9	
Air flow rate	cooling	H/L	m ³ /min	75/4.6	75/4.9
	heating	H/L	m ³ /min	78/4.8	78/5.2
Sound pressure level	cooling	H/L	dB(A)	39/27	39/29
	heating	H/L	dB(A)	39/27	39/29
Sound power level	cooling	H	dB(A)	57	57
Refrigerant type				R-410A	
Power supply				1~, 230V, 50Hz	
Infrared remote control				ARC445A1	

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT				RYN25D	RYN35D
Dimensions		HxWxD	mm	31	560x695x265
Weight			kg	47	36
Sound pressure level	cooling	H	dB(A)	47	48
	heating	H	dB(A)	49	49
Sound power level	cooling	H	dB(A)	62	63
Operation range	cooling	from ~ to	°CDB	+15 ~ 46	
	heating	from ~ to	°CWB	-10 ~ 20	
Refrigerant type				R-410A	
Power supply				1~, 230V, 50Hz	
Piping connections		liquid/gas	mm	ø6.4/ø9.5	
Max. piping length/Max. level difference				15/10	