


FTYN-E/RYN-E

Wall mounted unit

new ➡



FTYN50,60E

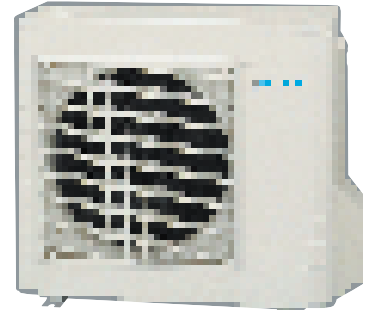

RYN50,60E

- Flat front panel: stylish and more easy to clean
- Lightweight and compact
- Titanium apatite photocatalytic air purification filter
- Powerful mode can be selected for rapid cooling and/or heating

- Energy efficient
- Automatic air flow director ensures uniform air flow and temperature distribution



HEAT PUMP

INDOOR UNIT (air cooled)				FTYN50E		FTYN60E	
Cooling capacity		nominal	kW	5.0		6.0	
Heating capacity		nominal	kW	5.8		7.0	
Nominal input	cooling	nominal	kW	1.55		1.99	
	heating	nominal	kW	1.60		2.04	
EER	cooling			3.23		3.02	
COP	heating			3.63		3.43	
Energy label	cooling			A		B	
	heating			A		B	
Annual energy consumption	cooling		kWh	775		995	
Dimensions		HxWxD	mm	290x(1,050)x238			
Weight			kg	12			
Air flow rate	cooling	H/L	m ³ /min	14.7/10.3		16.2/11.4	
	heating	H/L	m ³ /min	16.1/11.5		17.4/12.7	
Sound pressure level	cooling	H/L	dB(A)	43/34		45/36	
	heating	H/L	dB(A)	42/33		44/35	
Sound power level	cooling	H	dB(A)	59		61	
Refrigerant type				R-410A			
Power supply				1 ~ 220 ~ 240V, 50Hz			
Infrared remote control				ARC433B24			

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

NON-INVERTER

OUTDOOR UNIT				RYN50E		RYN60E	
Dimensions		HxWxD	mm	735x825x300			
Weight			kg	48			
Sound pressure level	cooling	H	dB(A)	47		49	
	heating	H	dB(A)	48		49	
Sound power level	cooling	H	dB(A)	61		63	
Operation range	cooling	from ~ to	°CDB	-10 ~ 46			
	heating	from ~ to	°CWB	-15 ~ 18			
Refrigerant type				R-410A			
Power supply				1 ~ 220 ~ 240V, 50Hz			
Piping connections		liquid/gas	mm	ø6.4/ø12.7			
Max. piping length/Max. level difference				30/20			