




FTXS-C / RXS-C / RXH-C

Wall mounted unit



- Flat front panel: stylish appearance and more easy to clean
- lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution

- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Outdoor unit silent operation (only in combination with RXS-C outdoor units)
- Night quiet mode (only in multi application + cooling mode)

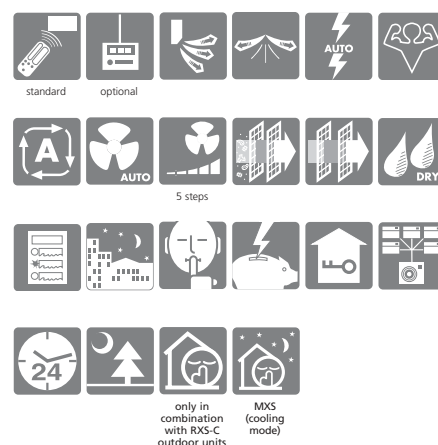

HEAT PUMP

INDOOR UNIT		
Cooling capacity	min ~ nom ~ max	kW
Heating capacity	min ~ nom ~ max	kW
Nominal input	cooling	min ~ nom ~ max
	heating	min ~ nom ~ max
EER		
COP		
Energy label	cooling	
	heating	
Annual energy consumption		kWh
Dimensions	HxWxD	mm
Weight		kg
Air flow rate (H/L)	cooling	m³/min
	heating	m³/min
Sound pressure level (H/L)	cooling	dB(A)
	heating	dB(A)
Sound power level (H)	cooling	dB(A)
	heating	dB(A)
Refrigerant type		
Power supply		VM
Infrared remote control		

DC-INVERTER

FTXS20CVMB	FTXS25CVMB	FTXS35CVMB
13 ~ 2.0 ~ 2.6	13 ~ 2.5 ~ 3.0	14 ~ 3.4 ~ 3.8
13 ~ 2.7 ~ 4.5	13 ~ 3.4 ~ 4.5	14 ~ 4.0 ~ 5.0
0.30 ~ 0.50 ~ 0.98	0.30 ~ 0.695 ~ 0.98	0.30 ~ 1.06 ~ 1.30
0.29 ~ 0.675 ~ 1.48	0.29 ~ 0.935 ~ 1.46	0.31 ~ 1.17 ~ 1.59
4.00	3.60	3.21
4.00	3.64	3.42
A	A	A
A	A	B
250	348	530
273x784x195		
75		
77*	77*	77*
78*	78*	81*
38/25/22	38/25/22	39/26/23
38/28/25	38/28/25	39/29/26
56	56	57
56	56	57
R-410A		
1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz		
ARC433A1		

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
2) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.
3) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT			RXS20CVMB	RXS25CVMB	RXS35CVMB	RXH20CVMB	RXH25CVMB	RXH35CVMB
Dimensions	HxWxD	mm	550x765x285			560x695x265		
Weight		kg	30		32	31		33
Sound pressure level (H/L)	cooling	dB(A)	46/43	46/43	47/44	46/*	46/*	48/*
	heating	dB(A)	47/44	47/44	48/45	47/*	47/*	48/*
Sound power level (H)	cooling	dB(A)	61	61	62	61	61	63
	heating	dB(A)	62	62	63	62	62	63
Operation range	cooling	from ~ to	-10 ~ -46			10 ~ -46		
	heating	from ~ to	-15 ~ -20			-10 ~ -20		
Refrigerant type			R-410A			R-410A		
Power supply			1 ~, 220-240/-220-230V, 50/60Hz			1 ~, 220-240/-220-230V, 50/60Hz		

* This information was not available at the time of publication.