



FTKS-C/RKS-D

Wall mounted unit




FTKS20,25,35C



RKS20,25,35D

- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms

- Dual air discharge flow for better air distribution
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling
- Indoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

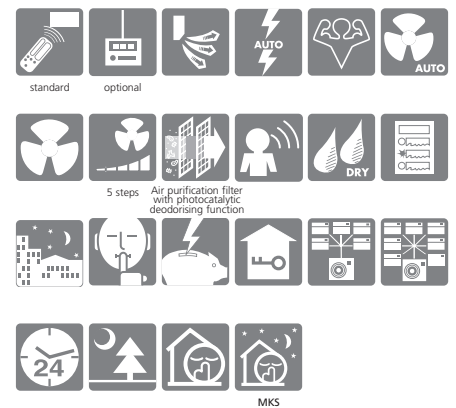

COOLING ONLY

INVERTER

INDOOR UNIT (air cooled)			FTKS20C	FTKS25C	FTKS35C
Cooling capacity	min ~ nom ~ max	kW	13 ~ 2.0 ~ 2.6	13 ~ 2.5 ~ 3.0	14 ~ 3.4 ~ 3.8
Nominal input	min ~ nom ~ max	kW	0.30 ~ 0.50 ~ 0.98	0.30 ~ 0.695 ~ 0.98	0.30 ~ 1.06 ~ 1.30
EER			4.00	3.60	3.21
Energy label			A	A	A
Annual energy consumption		kWh	250	348	530
Dimensions	HxWxD	mm	273x784x195		
Weight		kg	7.5		
Air flow rate	H	m ³ /min	7.7	7.7	7.7
Sound pressure level	H/L/SL	dB(A)	38/25/22	38/25/22	39/26/23
Sound power level	H	dB(A)	56	56	57
Refrigerant type			R-410A		
Power supply		VM	1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz		
Infrared remote control			ARC433A2		

Notes:
 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT			RKS20D	RKS25D	RKS35D
Dimensions	HxWxD	mm		550x765x285	
Weight		kg	30		
Sound pressure level	H/L	dB(A)	46/43	46/43	47/44
Sound power level	H	dB(A)	61	61	62
Operation range	from ~ to	°CDB	-10 ~ 46		
Refrigerant type			R-410A		
Power supply		VM	1 ~, 220-240/220-230V, 50/60Hz		
Piping connections	liquid/gas	mm	ø6.4/ø9.5		
Max. piping length/Max. level difference		m	20/15		

FTXS-C/RXS-D

Wall mounted unit




FTXS20,25,35C



RXS20,25,35D

- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms

- Dual air discharge flow for better air distribution
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

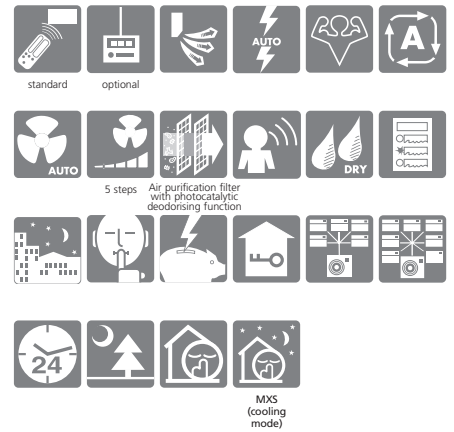

HEAT PUMP

INVERTER

INDOOR UNIT (air cooled)				FTXS20C	FTXS25C	FTXS35C
Cooling capacity	min ~ nom ~ max	kW		13 ~ 2.0 ~ 2.6	13 ~ 2.5 ~ 3.0	14 ~ 3.4 ~ 3.8
Heating capacity	min ~ nom ~ max	kW		13 ~ 2.7 ~ 4.5	13 ~ 3.4 ~ 4.5	14 ~ 4.0 ~ 5.0
Nominal input	cooling	min ~ nom ~ max	kW	0.30 ~ 0.50 ~ 0.98	0.30 ~ 0.695 ~ 0.98	0.30 ~ 1.06 ~ 1.30
	heating	min ~ nom ~ max	kW	0.29 ~ 0.675 ~ 1.48	0.29 ~ 0.935 ~ 1.46	0.31 ~ 1.17 ~ 1.59
EER				4.00	3.60	3.21
COP				4.00	3.64	3.42
Energy label	cooling			A	A	A
	heating			A	A	B
Annual energy consumption	cooling	kWh		250	348	530
Dimensions	HxWxD	mm		273x784x195		
Weight		kg		75		
Air flow rate	cooling	H	m ³ /min	7.7	7.7	7.7
	heating	H	m ³ /min	7.8	7.8	8.1
Sound pressure level	cooling	H/L/SL	dB(A)	38/25/22	38/25/22	39/26/23
	heating	H/L/SL	dB(A)	38/28/25	38/28/25	39/29/26
Sound power level	cooling	H	dB(A)	56	56	57
Refrigerant type				R-410A		
Power supply		VM		1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz		
Infrared remote control				ARC433A1		

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT				RXS20D	RXS25D	RXS35D
Dimensions	HxWxD	mm			550x765x285	
Weight		kg		30		32
Sound pressure level	cooling	H/L	dB(A)	46/43	46/43	47/44
	heating	H/L	dB(A)	47/44	47/44	48/45
Sound power level	cooling	H	dB(A)	61	61	62
Operation range	cooling	from ~ to	°CDB		-10 ~ 46	
	heating	from ~ to	°CWB		-15 ~ 20	
Refrigerant type				R-410A		
Power supply		VM		1 ~, 220-240/220-230V, 50/60Hz		
Piping connections	liquid/gas	mm		ø6.4/ø9.5		
Max. piping length/Max. level difference		m		20/15		



FTKS-C/RKH-C

Wall mounted unit




FTKS20,25,35C



RKH20,25,35C

- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms

- Dual air discharge flow for better air distribution
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling
- Indoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

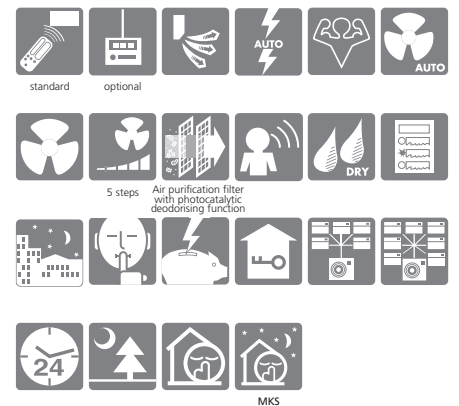

COOLING ONLY

INDOOR UNIT (air cooled)			INVERTER		
			FTKS20C	FTKS25C	FTKS35C
Cooling capacity	min ~ nom ~ max	kW	13 ~ 2.0 ~ 2.6	13 ~ 2.25 ~ 3.0	1.4 ~ 3.15 ~ 3.8
Nominal input	min ~ nom ~ max	kW	0.43 ~ 0.62 ~ 0.945	0.43 ~ 0.70 ~ 1.20	0.46 ~ 1.045 ~ 1.425
EER			3.23	3.21	3.01
Energy label			A	A	B
Annual energy consumption		kWh	310	350	523
Dimensions	HxWxD	mm	273x784x195		
Weight		kg	75		
Air flow rate	H	m ³ /min	7.7	7.7	7.7
Sound pressure level	H/L/SL	dB(A)	38/25/22	38/25/22	39/26/23
Sound power level	H	dB(A)	56	56	57
Refrigerant type			R-410A		
Power supply		VM	1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz		
Infrared remote control			ARC433A2		

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT			RKH20C	RKH25C	RKH35C
Dimensions	HxWxD	mm	560x695x265		
Weight		kg	31		
Sound pressure level	H	dB(A)	46	46	48
Sound power level	H	dB(A)	61	61	63
Operation range	from ~ to	°CDB	+10 ~ 46		
Refrigerant type			R-410A		
Power supply		VM	1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz		
Piping connections	liquid/gas	mm	ø6.4/ø9.5		
Max. piping length/Max. level difference		m	15/15		



FTXS-C/RXH-C

Wall mounted unit




FTXS20,25,35C



RXH20,25,35C

- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms

- Dual air discharge flow for better air distribution
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

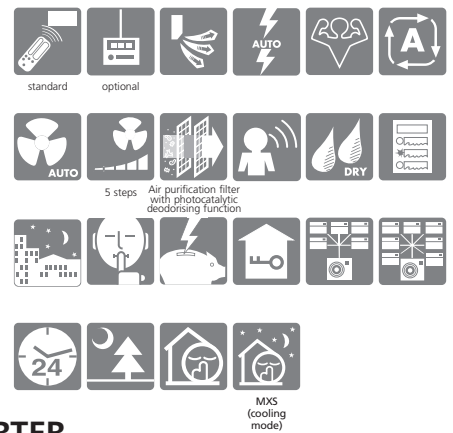

HEAT PUMP

INVERTER

INDOOR UNIT (air cooled)				FTXS20C	FTXS25C	FTXS35C
Cooling capacity		min ~ nom ~ max	kW	13 ~ 20 ~ 2.6	13 ~ 22.5 ~ 3.0	14 ~ 31.5 ~ 3.8
Heating capacity		min ~ nom ~ max	kW	13 ~ 2.6 ~ 4.0	13 ~ 2.85 ~ 4.5	14 ~ 3.6 ~ 5.0
Nominal input	cooling	min ~ nom ~ max	kW	0.43 ~ 0.62 ~ 0.945	0.43 ~ 0.70 ~ 1.20	0.46 ~ 1.045 ~ 1.425
	heating	min ~ nom ~ max	kW	0.35 ~ 0.76 ~ 1.31	0.35 ~ 0.835 ~ 1.61	0.405 ~ 1.055 ~ 1.90
EER				3.23	3.21	3.01
COP				3.42	3.41	3.41
Energy label	cooling			A	A	B
	heating			B	B	B
Annual energy consumption	cooling		kWh	310	350	523
Dimensions		HxWxD	mm	273x784x195		
Weight			kg	75		
Air flow rate	cooling	H	m ³ /min	77	77	77
	heating	H	m ³ /min	78	78	81
Sound pressure level	cooling	H/L/SL	dB(A)	38/25/22	38/25/22	39/26/23
	heating	H/L/SL	dB(A)	38/28/25	38/28/25	39/29/26
Sound power level	cooling	H	dB(A)	56	56	57
Refrigerant type				R-410A		
Power supply			VM	1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz		
Infrared remote control				ARC433A1		

Notes:

- 1) Energy label: scale from A (most efficient) to G (less efficient).
- 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT				RXH20C	RXH25C	RXH35C
Dimensions		HxWxD	mm		560x695x265	
Weight			kg	31		
Sound pressure level	cooling	H	dB(A)	46	46	48
	heating	H	dB(A)	47	47	48
Sound power level	cooling	H	dB(A)	61	61	63
Operation range	cooling	from ~ to	°CWB	+10 ~ 46		
	heating	from ~ to	°CWB	-10 ~ 20		
Refrigerant type				R-410A		
Power supply			VM	1 ~, 220-240/-220-230V, 50/60Hz		
Piping connections		liquid/gas	mm	ø6.4/ø9.5		
Max. piping length/Max. level difference			m	15/15		