



FTXS-C / RX-E

Wall mounted unit



ARC 433AR




FTXS 20,25,35C



RX 20,25,35E

- Flat front panel: its stylish appearance blends easily within any interior décor and is more easy to clean.
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- Reaches set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling or heating
- Indoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)

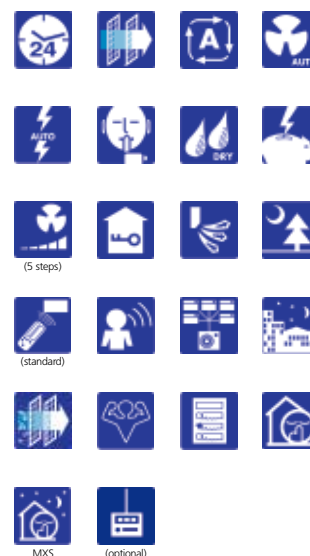

HEAT PUMP

INVERTER

Indoor Units				FTXS20CAVMB	FTXS25CAVMB	FTXS35CAVMB
Nominal Capacity	Cooling capacity	Minimum	kW	1.2	1.2	1.2
		Standard	kW	2.0	2.5	3.4
		Maximum	kW	2.6	3.00	3.8
	Heating capacity	Minimum	kW	1.2	1.2	1.2
		Standard	kW	2.7	3.4	3.7
		Maximum	kW	4.1	4.5	5.0
Annual energy consumption			kWh	290	385	530
EER / COP	Cooling / Heating			3.45 / 3.80	3.25 / 3.62	3.21 / 3.63
Energy Label	cooling / heating			A / A	A / A	A / A
Dimensions	(Height x Width x Depth)		mm	273x784x195		
Weight			kg	7.5		
Air Flow Rate	Cooling	H/M/L/SL	m³/min	7.70 / 5.90 / 4.20 / 3.60		7.70 / 6.00 / 4.40 / 3.80
	Heating	H/M/L/SL	m³/min	7.80 / 6.50 / 5.30 / 4.60		8.10 / 6.70 / 5.30 / 4.60
Sound Power	Cooling	High	dBA	56.0		57.0
	Heating	High	dBA	56.0		57.0
Sound Pressure	Cooling	H/M/L/SL	dBA	38.0 / 32.0 / 25.0 / 22.0		39.0 / 33.0 / 26.0 / 23.0
	Heating	H/M/L/SL	dBA	38.0 / 33.0 / 28.0 / 25.0		39.0 / 34.0 / 29.0 / 26.0
Refrigerant			Type	R-410A		
Power Supply				1~/220-240/220-230V/50/60Hz		

Outdoor Unit				RX20E2V1B	RX25E2V1B	RX35E2V1B
Dimensions	(Height x Width x Depth)		mm	550x765x285		
Weight			kg	30	30	32
Sound pressure level	Cooling	H	dBA	46	46	47
	Heating	H	dBA	47	47	48
Sound power level	Cooling	H	dBA	61	61	62
Operation Range	Cooling	Min~Max	°CDB	10.0~46.0		
	Heating	Min~Max	°CWB	-10~20		
Refrigerant			Type	R-410A		
Power Supply				1~/220-240/220-230V/50Hz		
Piping connections	Liquid (OD)/Gas/Drain		mm	6.35 / 9.5 / 18		
Piping Length (Maximum)			m	15		
Max. internunit level difference			m	10.0		