




FTKS-B / RKS-B

Wall mounted unit



- Flat front panel: stylish appearance and more easy to clean
- Consumes up to 30% less energy than non-inverter units
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution

- 3D-air flow
- lightweight and compact
- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

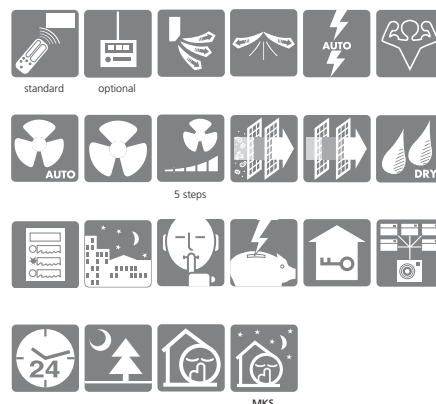

COOLING ONLY

DC-INVERTER

INDOOR UNIT				FTKS50BVMB	FTKS60BVMB	FTKS71BVMB
Cooling capacity		min ~ nom ~ max	kW	0.90 ~ 5.00 ~ 5.80	0.90 ~ 6.00 ~ 6.70	0.90 ~ 7.10 ~ 8.00
Nominal input	cooling	min ~ nom ~ max	kW	0.45 ~ 1.66 ~ 2.30	0.45 ~ 2.12 ~ 2.45	0.45 ~ 2.53 ~ 3.07
EER				3.01	2.83	2.81
Energy label				B	C	C
Annual energy consumption			kWh	830	1,060	1,265
Dimensions	HxWxD		mm	290x795x238	290x1,050x238	
Weight			kg	9	12	12
Air flow rate (H/L/SL)	cooling		m ³ /min	11.4/8.0/7.1	16.2/11.4/10.2	16.7/11.6/10.6
Sound pressure level (H/L/SL)	cooling		dB(A)	44/35/32	45/36/33	46/37/34
Sound power level (H)	cooling		dB(A)	63	63	63
Refrigerant type				R-410A		
Power supply			VM	1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz		
Infrared remote control				ARC433A22		

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.
 3) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT				RKS50BVMB9	RKS60BVMB9	RKS71BVMB9
Dimensions	HxWxD		mm	735x825x300		
Weight			kg	49	53	55
Sound pressure level (H)	cooling		dB(A)	47	49	52
Sound power level (H)	cooling		dB(A)	63	64	66
Operation range	cooling	from ~ to	°CDB	-10 (-15*) ~ 46		
Refrigerant type				R-410A		
Power supply			VM	1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz		

* Possibility to extend the operation range down to -15°C by turning ON the switch on the outdoor unit PCB. In this case, the unit will stop operation at -20°C or lower and will recover when temperature rises again.