




FTXS-B / RXS-B

Wall mounted unit



- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- 3D-air flow

- Air purification filter with photocatalytic deodorising function
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

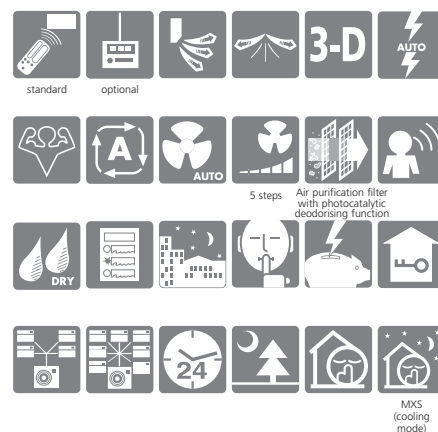

HEAT PUMP

INDOOR UNIT (air cooled)			
Cooling capacity	min ~ nom ~ max		kW
Heating capacity	min ~ nom ~ max		kW
Nominal input	cooling	min ~ nom ~ max	kW
	heating	min ~ nom ~ max	kW
EER			
COP			
Energy label	cooling		B
	heating		B
Annual energy consumption	cooling		kWh
Dimensions	HxWxD		mm
Weight			kg
Air flow rate	cooling	H/L/SL	m³/min
	heating	H/L/SL	m³/min
Sound pressure level	cooling	H/L/SL	dB(A)
	heating	H/L/SL	dB(A)
Sound power level	cooling/heating	H	dB(A)
Refrigerant type			
Power supply		VM	
Infrared remote control			

INVERTER

FTXS50BVMB	FTXS60BVMB	FTXS71BVMB
0.90 ~ 5.00 ~ 5.80	0.90 ~ 6.00 ~ 6.70	0.90 ~ 7.10 ~ 8.00
0.90 ~ 5.80 ~ 7.50	0.90 ~ 7.00 ~ 8.00	0.90 ~ 8.50 ~ 9.50
0.45 ~ 1.66 ~ 2.30	0.45 ~ 2.12 ~ 2.45	0.45 ~ 2.53 ~ 3.07
0.45 ~ 1.70 ~ 2.58	0.45 ~ 2.09 ~ 3.10	0.45 ~ 2.63 ~ 3.80
3.01	2.83	2.81
3.41	3.35	3.23
B	C	C
B	C	C
830	1,060	1,265
290x795x238	290x1,050x238	
9	12	
11.4/8.0/7.1	16.2/11.4/10.2	16.7/11.6/10.6
12.6/8.9/7.7	17.4/12.7/11.4	18.5/13.5/12.1
44/35/32	45/36/33	46/37/34
42/22/30	44/35/32	46/37/34
63/60	63/62	63/63
	R-410A	
	1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz	
ARC433A21	ARC433A21	

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.
 3) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT			RXS50BVMB	RXS60BVMB	RXS71BVMB
Dimensions	HxWxD	mm		735x825x300	
Weight		kg	49	53	55
Sound pressure level (night quiet mode)	cooling	H	47	49	52
	heating	H	48	49	52
Sound power level	cooling/heating	H	63/*	64/*	66/*
Operation range	cooling	from ~ to		-10 ~ 46	
	heating	from ~ to		-15 ~ 21	
Refrigerant type				R-410A	
Power supply		VM		1 ~, 220 ~ 240/220 ~ 230V, 50/60Hz	

* This information was not available at time of publication