



FTXS-D / RXS-D CTXS-D/MXS-D

Wall mounted unit

NEW


FTXS20,25,35DVML

RXS20,25,35D



- Flat front panel: stylish appearance and more easy to clean
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- ECONO mode decreases the power consumption so that other appliances that need large power consumption can be used. This function is also energy saving.
- Achieves set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor automatically saves power consumption in unoccupied rooms

- Dual air discharge flow for better air distribution
- COMFORT mode reassures draught free operation
- Titanium apatite photocatalytic air purification filter: this filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- Powerful mode can be selected for rapid cooling and/or heating
- Indoor unit silent operation
- Outdoor unit silent operation
- Night quiet mode (only in multi application + cooling mode)

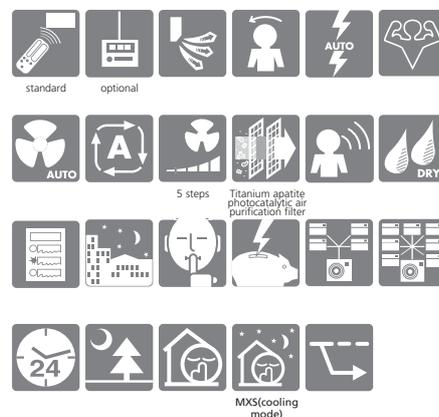

HEAT PUMP

INVERTER

INDOOR UNIT (air cooled)				FTXS20DVMW/L	FTXS25DVMW/L	FTXS35DVMW/L	CTXS50DVMW/L
Cooling capacity		min~nom~max	kW	13~2.0~2.6	13~2.5~3.0	1.4~3.4~3.8	For more detailed information about capacities, power input, EER/COP, Energy label and annual energy consumption, please refer to our Multi Model catalogue/combination tables or check with your local dealer.
		min~nom~max	kW	13~2.7~4.1	1.3~3.4~4.5	1.4~4.0~5.0	
Nominal input	cooling	min~nom~max	kW	0.30~0.49~0.83	0.30~0.685~0.96	0.30~1.045~1.27	
	heating	min~nom~max	kW	0.29~0.66~1.30	0.29~0.92~1.43	0.31~1.155~1.56	
EER				4.08	3.65	3.25	
COP				4.09	3.70	3.46	
Energy label	cooling			A	A	A	
	heating			A	A	B	
Annual energy consumption	cooling		kWh	245	343	523	
Dimensions		HxWxD	mm		283x800x195		283x800x195
Weight			kg	9	9	9	9
Air flow rate	cooling	H/L/SL	m ³ /min	8.7/4.7/3.9	8.7/4.7/3.9	8.9/4.8/4.0	11.4/7.1/6.2
	heating	H/L/SL	m ³ /min	9.4/5.8/5.0	9.4/5.8/5.0	9.7/6.0/5.2	11.4/7.4/6.3
Sound pressure level	cooling	H/L/SL	dB(A)	38/25/22	38/25/22	39/26/23	46/35/32
	heating	H/L/SL	dB(A)	38/28/25	38/28/25	39/29/26	44/33/30
Sound power level	cooling/heating	H	dB(A)	56/56	56/56	57/57	64/62
Refrigerant type				R-410A			R-410A
Power supply			VM	1~, 220-240/220-230V, 50/60Hz			1~, 220-240/220-230V, 50/60Hz
Infrared remote control				ARC433A50			ARC433A50

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).
 3) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.

OUTDOOR UNIT				RXS20DVMB	RXS25DVMB	RXS35DVMB	2,3MXS52/4MXS68,80DVMB
Dimensions		HxWxD	mm		550x765x285		
Weight			kg	30			32
Sound pressure level	cooling	H/L	dB(A)	46/43	46/43	47/44	Multi application only. For more specifications, please refer to page 100 of this catalogue.
	heating	H/L	dB(A)	47/44	47/44	48/45	
Sound power level	cooling/heating	H	dB(A)	61/62	61/62	62/63	
	cooling/heating	H	dB(A)	61/62	61/62	62/63	
Operation range	cooling		°CDB	-10~46			
	heating		°CWB	-15~20			
Refrigerant type				R-410A			
Power supply			VM	1~, 220-240/220-230V, 50/60Hz			