



FTXS-DL / RXS-E

Wall mounted unit



ARC433A43




FTXS20,25,35D3VML



RXS20,25,35E

- Flat front panel: its stylish appearance blends easily within any interior décor and is more easy to clean.
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Energy saving
- Reaches set temperature more quickly
- Home leave operation saves energy during absence
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution

- Comfort mode for draught free operation
- Titanium apatite photocatalytic air purification filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- Powerful mode can be selected for rapid cooling or heating
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)

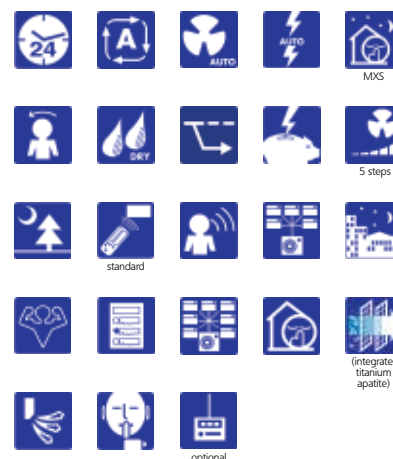

HEAT PUMP

INVERTER

Indoor Units				FTXS20D3VML	FTXS25D3VML	FTXS35D3VML	
Nominal Capacity	Cooling capacity	Minimum	kW	1.2	1.2	1.2	
		Standard	kW	2.0	2.5	3.4	
		Maximum	kW	2.6	3.0	3.8	
	Heating capacity	Minimum	kW	1.2	1.2	1.2	
		Standard	kW	2.7	3.4	4.0	
		Maximum	kW	4.1	4.5	5.0	
EER / COP	Cooling / Heating		4.17 / 4.15	4.17 / 4.10	3.40 / 3.70		
Annual energy consumption			kWh	240	300	500	
Energy Label	cooling / heating		A / A				
Dimensions	(Height x Width x Depth)		mm	283x800x195	283x800x195	283x800x195	
Weight			kg	9.0	9.0	9.0	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.7 / 6.7 / 4.7 / 3.9	8.7 / 6.7 / 4.7 / 3.9	8.9 / 6.9 / 4.8 / 4.0	
	Heating	H/M/L/SL	m³/min	9.4 / 7.6 / 5.8 / 5.0	9.4 / 7.6 / 5.8 / 5.0	9.7 / 7.9 / 6.0 / 5.2	
Sound Power	Cooling	High	dBA	56.0	56.0	57.0	
	Heating	High	dBA	56.0	56.0	57.0	
Sound Pressure	Cooling	H/L/SL	dBA	38.0 / 25.0 / 22.0	38.0 / 25.0 / 22.0	39.0 / 26.0 / 23.0	
		H/M/L/SL	dBA	-	-	-	
	Heating	H/L/SL	dBA	38.0 / 28.0 / 25.0	38.0 / 28.0 / 25.0	39.0 / 29.0 / 26.0	
		H/M/L/SL	dBA	-	-	-	
	Refrigerant			Type	R-410A	R-410A	R-410A
	Power Supply				1~/220-240/220-230V/50/60Hz	1~/220-240/220-230V/50/60Hz	1~/220-240/220-230V/50/60Hz

Outdoor Unit				RXS20E2V1B	RXS25E2V1B	RXS35E2V1B
Dimensions	(Height x Width x Depth)		mm	550x765x285	550x765x285	550x765x285
Weight			kg	30	32	32
Sound pressure level	Cooling	H/L	dBA	46 / 43	46 / 43	47 / 44
	Heating	H/L	dBA	47 / 44	47 / 44	48 / 45
Sound power level	Cooling		dBA	61	61	62
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46
	Heating	Min~Max	°CWB	-15~20	-15~20	-15~20
Refrigerant			Type	R-410A	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas/Drain		mm	6.35 / 9.5 / 18	6.35 / 9.5 / 18	6.35 / 9.5 / 18
Piping Length (Maximum)			m	20	20	20
Max. internut level difference			m	15	15	15