



FTXS-F / RXS-F

Wall Mounted Unit



ARC433A70




FTXS50,60,71F



RXS50,60,71F

- Flat front panel: its stylish appearance blends easily within any interior décor and is more easy to clean.
- Lightweight and compact
- Home leave operation saves energy during absence
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution
- Titanium apatite photocatalytic air purification filter
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)

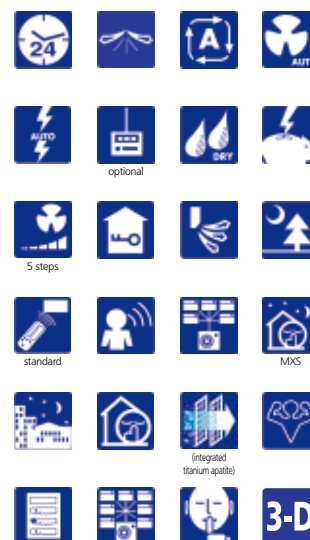

HEAT PUMP

INVERTER

Indoor Units				FTXS50FV1B	FTXS60FV1B	FTXS71FV1BA
Nominal Capacity	Cooling capacity	Minimum	kW	1.7	1.7	2.3
		Standard	kW	5.0	6.0	7.1
		Maximum	kW	6.0	6.7	8.5
Heating capacity	Minimum	kW	1.7	1.7	2.3	
	Standard	kW	5.8	7.0	8.2	
	Maximum	kW	7.7	8.0	10.2	
EER / COP	Cooling / Heating		3.23 / 3.63	3.02 / 3.43	3.02 / 3.22	
Annual energy consumption		kWh	775	995	1175	
Energy Label	cooling / heating		A / A	B / B	B / C	
Dimensions	(Height x Width x Depth)	mm	290x1050x238	290x1050x238	290x1050x238	
Weight		kg	12	12	12	
Air Flow Rate	Cooling	H/M/L/SL	m³/min	14.7 / 12.4 / 10.3 / 9.5	16.2 / 13.6 / 11.4 / 10.2	17.4 / 14.6 / 11.6 / 10.6
	Heating	H/M/L/SL	m³/min	16.1 / 13.9 / 11.5 / 10.2	17.4 / 15.1 / 12.7 / 11.4	19.7 / 16.9 / 14.3 / 12.7
Sound Power	Cooling	Medium	dBA	59	61	62
	Heating	Medium	dBA	58	60	62
Sound Pressure	Cooling	H/M/L/SL	dBA	43 / 39 / 34 / 31	45 / 41 / 36 / 33	46 / 42 / 37 / 34
	Heating	H/M/L/SL	dBA	42 / 38 / 33 / 30	44 / 40 / 35 / 32	46 / 42 / 37 / 34
Refrigerant		Type	R-410A	R-410A	R-410A	
Power Supply			1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz	

Outdoor Unit				RXS50F2V1B	RXS60F2V1B	RXS71FV1B
Dimensions	(Height x Width x Depth)	mm		735x825x300	735x825x300	770x900x320
Weight		kg		48	48	71
Sound pressure level	Cooling	H/SL	dBA	47 / 44	49 / 46	52-49
	Heating	H/SL	dBA	48 / 44	49 / 46	52-49
Sound power level	Cooling	H	dBA	61	63	66
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46
	Heating	Min~Max	°CWB	-15~18	-15~18	-15~18
Refrigerant		Type	R-410A	R-410A	R-410A	
Power Supply			1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz	
Piping connections	Liquid (OD)/Gas/Drain	mm		6.35 / 12.7 / 20	6.35 / 12.7 / 18	6.35 / 15.9 / 18
Piping Length (Maximum)		m		30	30	30
Max. internutnity level difference		m		20	20	20