



INVERTER

FTXS-D / RXS-E/F

Wall mounted unit



ARC433A43



FTXS20,25,35D3VML


FTXS20,25,35D3VMW



RXS25,35F

- Flat front panel: its stylish appearance blends easily within any interior décor and is more easy to clean.
- Lightweight and compact
- Consumes up to 30% less energy than non-inverter units
- ECONO mode decreases power consumption so that other appliances that need large power supply can be used
- Energy saving
- Reaches set temperature more quickly
- Movement sensor saves power consumption in unoccupied rooms
- Dual air discharge flow for better air distribution

- **Comfort Mode:** guarantees draught free operation. When it cools, the flap is positioned horizontally to prevent cold air flow from being blown directly onto the body. When it heats, the flap turns vertically downwards to take the warm air to the bottom of the room.
- Titanium apatite photocatalytic air purification filter absorbs microscopic particles, decomposes odours and even deactivates bacteria and viruses
- **Powerful operation:** activates the maximum air volume for 20 minutes. After this, the air conditioner automatically returns to its original setting.
- Indoor / outdoor unit silent operation
- Night quiet mode (only in multi application and cooling only mode)
- Connection to multi outdoor possible

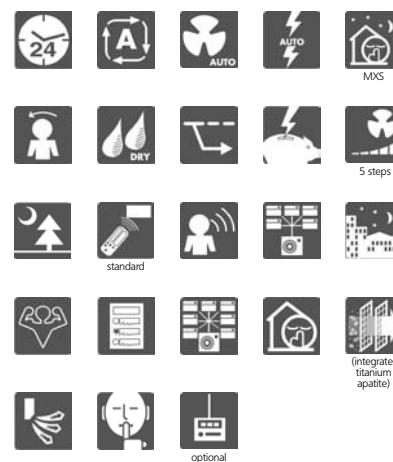

HEAT PUMP

INVERTER

Indoor Units				FTXS20D3VMW	FTXS20D3VML	FTXS25D3VMW	FTXS25D3VML	FTXS35D3VMW	FTXS35D3VML
Nominal Capacity	Cooling capacity	Minimum	kW	1.2	-	-	-	-	-
		Standard	kW	2.0	-	-	-	-	-
		Maximum	kW	2.6	-	-	-	-	-
	Heating capacity	Minimum	kW	1.2	-	-	-	-	-
		Standard	kW	2.7	-	-	-	-	-
		Maximum	kW	4.1	-	-	-	-	-
EER / COP	Cooling / Heating		4.17 / 4.15	-	-	-	-	-	
Annual energy consumption		kWh	240	-	-	-	-	-	
Energy Label	cooling / heating		A / A	-	-	-	-	-	
Dimensions	(Height x Width x Depth)	mm	283x800x195		283x800x195		283x800x195		283x800x195
Weight		kg	9.0		9.0		9.0		9.0
Air Flow Rate	Cooling	H/M/L/SL	m³/min	8.7 / 6.7 / 4.7 / 3.9		8.7 / 6.7 / 4.7 / 3.9		8.9 / 6.9 / 4.8 / 4.0	
	Heating	H/M/L/SL	m³/min	9.4 / 7.6 / 5.8 / 5.0		9.4 / 7.6 / 5.8 / 5.0		9.7 / 7.9 / 6.0 / 5.2	
Sound Power	Cooling	High	dBA	56.0		56.0		57.0	
	Heating	High	dBA	56.0		56.0		57.0	
Sound Pressure	Cooling	H/L/SL	dBA	38.0 / 25.0 / 22.0		38.0 / 25.0 / 22.0		39.0 / 26.0 / 23.0	
	Heating	H/L/SL	dBA	38.0 / 28.0 / 25.0		38.0 / 28.0 / 25.0		39.0 / 29.0 / 26.0	
Refrigerant		Type		R-410A		R-410A		R-410A	
Power Supply				1~/220-240/220-230V/50/60Hz		1~/220-240/220-230V/50/60Hz		1~/220-240/220-230V/50/60Hz	

Outdoor Unit				RXS20E2V1B	RXS25F2V1B	RXS35F2V1B
Dimensions	(Height x Width x Depth)	mm		550x765x285	550x765x285	550x765x285
Weight		kg		30	34	34
Sound pressure level	Cooling	H/L	dBA	46 / 43	46 / 43	47 / 44
	Heating	H/L	dBA	47 / 44	47 / 44	48 / 45
Sound power level	Cooling		dBA	61	61	62
Operation Range	Cooling	Min~Max	°CDB	-10~46	-10~46	-10~46
	Heating	Min~Max	°CWB	-15~20	-15~20	-15~20
Refrigerant		Type		R-410A	R-410A	R-410A
Power Supply				1~/220-240V/50Hz	1~/220-240V/50Hz	1~/220-240V/50Hz
Piping connections	Liquid (OD)/Gas/Drain	mm		6.35 / 9.5 / 18	6.35 / 9.5 / 20	6.35 / 9.5 / 20
Piping Length (Maximum)		m		20	20	20
Max Installation Height Difference		m		15	15	15