




FUQ-BU / RZQ-B7

4-Way blow ceiling suspended cassette



- Ideal for refurbishment
- Leaves maximum floor and wall space for furniture, decoration
- Air can be discharged in any of four directions
- Air flow distribution for ceiling heights up to 3.5m
- No ceiling staining

- Possibility to shut off one or two flaps for easy installation in corners
- Extremely quiet in operation both indoor and outdoors
- Air filter, drain pan and heat exchanger fin are mildew proof
- Drain-up pump with increased lift of 500mm

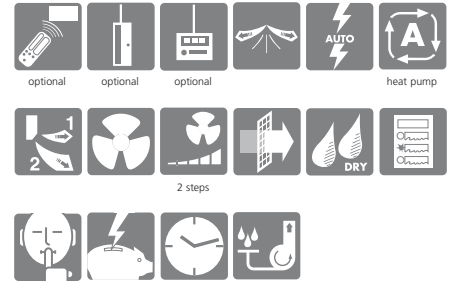

HEAT PUMP

INDOOR UNIT (air cooled)		
Cooling capacity	range	kW
Heating capacity	range	kW
Nominal input	cooling	min ~ nom ~ max kW
	heating	min ~ nom ~ max kW
EER		*
COP		*
Energy label	cooling	*
	heating	*
Annual energy consumption	cooling	kWh
Dimensions	HxWxD	mm
Weight		kg
Air flow rate (H/L)	cooling	m ³ /min
	heating	m ³ /min
Sound pressure level (H/L)	cooling	dB(A)
	heating	dB(A)
Sound power level	cooling	dB(A)
	heating	dB(A)
Refrigerant type		R-410A
Power supply		V1
Wired remote control		BRC10527

DC-INVERTER

	FUQ71BUV1B	FUQ100BUV1B	FUQ125BUV1B
Cooling capacity	3.3-8.0	5.0-11.2	6.0-14.0
Heating capacity	3.5-9.0	5.6-12.8	6.0-16.2
Nominal input	*	*	*
EER	*	*	*
COP	*	*	*
Energy label	*	*	*
Annual energy consumption	*	*	*
Dimensions	165x895x895	230x895x895	
Weight	25	31	
Air flow rate (H/L)	cooling	19/14	29/21
	heating	19/14	29/21
Sound pressure level (H/L)	cooling	40/35	43/38
	heating	40/35	43/38
Sound power level	cooling	56/51	59/54
	heating	56/51	59/54
Refrigerant type		R-410A	
Power supply		1 ~, 230V, 50Hz	
Wired remote control		BRC10527	

Notes: 1) Energy label: scale from A (most efficient) to G (less efficient).
 2) The Energy Label Directive 2002/31/EC will enter into force once the relevant measurement standard will be published in the European Official Standard.
 3) Annual energy consumption: based on average use of 500 running hours per year full load (= nominal capacity).

OUTDOOR UNIT

INDOOR UNIT		
Dimensions	HxWxD	mm
Weight		kg
Sound pressure level (night quiet mode)	cooling	dB(A)
	heating	dB(A)
Sound power level	cooling	dB(A)
	heating	dB(A)
Operation range	cooling	from ~ to °CDB
	heating	from ~ to °CWB
Refrigerant type		R-410A
Power supply		V3

	RZQ71B7V3B	RZQ100B7V3B	RZQ125B7V3B
Dimensions	770x600x320	1314x900x320	
Weight	62	107	
Sound pressure level (night quiet mode)	cooling	47 (43)	49 (45)
	heating	49	51
Sound power level	cooling	*	52
	heating	*	*
Operation range	cooling	from ~ to -15 ~ 50	from ~ to -15 ~ 50
	heating	from ~ to 20 ~ 15.5	from ~ to 20 ~ 15.5
Refrigerant type		R-410a	
Power supply		1 ~, 230V, 50Hz	

* This information was not available at the time of publication.