


FXAQ-M

Wall mounted unit



FXAQ40,50,63M



- New design with compact casing
- Dramatic weight reduction of 48% compared to the previous series
- Fits neatly on a wall
- Auto-swing mechanism ensures efficient air distribution via louvers that close automatically when the unit is switched off
- 5 different discharge angles can be programmed via the remote control



- Both horizontal flaps and front panel can easily be removed and washed
- Discharge angle automatically returns to its previous position on restart (initial setting 10° for cooling and 70° for heating)

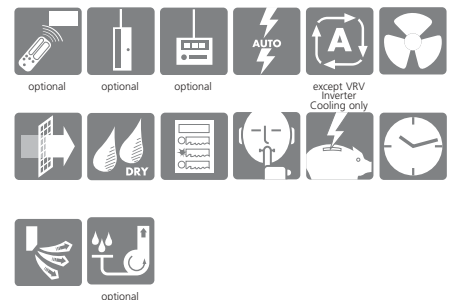

- All maintenance operations can be carried out from the front of the unit

FXAQ-MVE

INDOOR UNIT		20	25	32	40	50	63	
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	
Heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	
Nominal input	cooling	W	16	22	27	20	27	50
	heating	W	24	27	32	20	32	60
Dimensions (HxWxD)	mm	290x795x230			290x1050x230			
Weight	kg	11			14			
Air flow rate (H/L)	m ³ /min	7.5/4.5	8/5	9/5.5	12/9	15/12	19/14	
Sound pressure level (H/L)(220V)	dB(A)	35/29	36/29	37/29	39/34	42/36	46/39	
Sound power level	dB(A)	*	*	*	*	*	*	
Refrigerant type		R-410A						
Power supply	V1	1~, 50Hz, 220-240V						
Infrared remote control	cooling	BRC7E619						
	heating	BRC7E618						
Wired remote control		BRC1D517						

* Sound power levels were not available at time of publication