



 new


FXAQ-MA

Wall mounted unit


FXAQ40,50,63MA




- New design with compact casing
- Dramatic weight reduction of 48% compared to the previous series
- Fits neatly on a wall
- Auto-swing mechanism ensures efficient air distribution via louvres that close automatically when the unit is switched off
- 5 different discharge angles can be programmed via the remote control



- Both horizontal flaps and front panel can easily be removed and washed
- Discharge angle automatically returns to its previous position on restart (initial setting 10° for cooling and 70° for heating)



- All maintenance operations can be carried out from the front of the unit

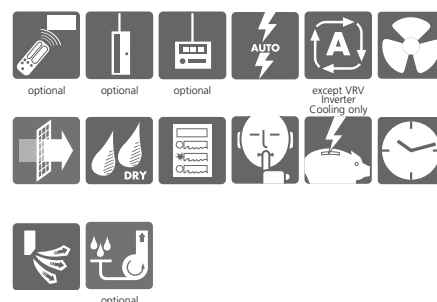

FXAQ-MA

INDOOR UNIT			20	25	32	40	50	63
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0
Nominal input	cooling	W	16	22	27	20	27	50
	heating	W	24	27	32	20	32	60
Dimensions (HxWxD)		mm	290x795x230			290x1,050x230		
Weight		kg	11			14		
Air flow rate (H/L)		m³/min	75/4.5	8/5	9/5.5	12/9	15/12	19/14
Sound pressure level (H/L)(220V)		dB(A)	35/29	36/29	37/29	39/34	42/36	46/39
Sound power level		dB(A)	*	*	*	*	*	*
Refrigerant type			R-410A					
Power supply		V1	1 ~, 50Hz, 220-240V					
Piping connections		liquid/gas	ø6.4/ø12.7					ø9.5/ø15.9
Infrared remote control		cooling	BRC7E619					
		heating	BRC7E618					
Wired remote control			BRC1D52					

* Sound power levels were not available at time of publication