FXCQ-M7

2-Way blow ceiling mounted cassette

FXCQ20,25,32M7

- Slim unit can be installed in a ceiling void of only 355mm
- Easy installation : depth of all units is 600mm
- Auto-swing mechanism ensures even room air and temperature distribution and prevents ceiling soiling
- Quiet operation
- Leaves maximum floor and wall space for furniture and decorations
- Easy to clean flat suction grille

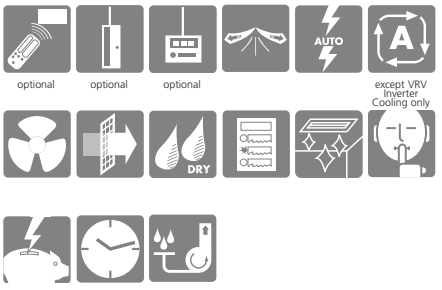

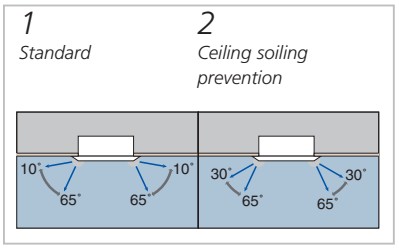

Note:
Set standard to 2-way discharge when shipped.
High ceiling types 1 and 2 will be set for remote control operation.

FXCQ-M7V1B

INDOOR UNIT			20	25	32	40	50	63	80	125
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	14.0
Heating capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	16.0
Nominal input	cooling	W	77	92	92	130	130	161	209	256
	heating	W	44	59	59	97	97	126	176	233
Dimensions (HxWxD)		mm	305x780x600			305x995x600		305x1,180x600	305x1,670x600	
Weight		kg	26			31	32	35	47	48
Air flow rate (H/L)		m^3/min	7/5	9/6.5	9/6.5	12/9	12/9	16.5/13	26/21	33/25
Sound pressure level (H/L)		dB(A)	33/28	35/29	35/29	35.5/30.5	35.5/30.5	38/33	40/35	45/39
Sound power level		dB(A)	45	50	50	50	50	52	54	60
Refrigerant type			R-410A							
Power supply		V1	1~, 50Hz, 230V							
Infrared remote control	cooling		BRC7C67							
	heating		BRC7C62							
Wired remote control			BRC1D517							
DECORATION PANEL			BYBC32GJW1			BYBC50GJW1		BYBC63GJW1	BYBC125GJW1	
Dimensions (HxWxD)		mm	53x1,030x680			53x1,245x680		53x1,430x680	53x1,920x680	
Weight		kg	8			8.5		9.5	12	

PROMISED DESIGN
R-410A