



# FXCQ-M7



2-Way blow  
ceiling mounted cassette

FXCQ20,25,32M7



- Slim unit can be installed in a ceiling void of only 355mm
- Easy installation : depth of all units is 600mm
- Auto-swing mechanism ensures even room air and temperature distribution and prevents ceiling soiling

- Quiet operation
- Leaves maximum floor and wall space for furniture and decorations
- Easy to clean flat suction grille

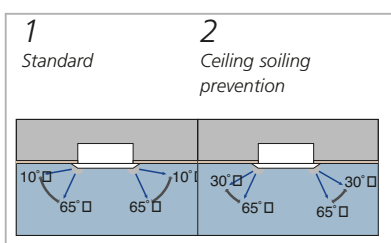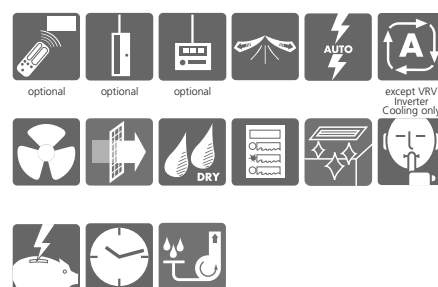

Note:  
Set standard to 2-way discharge when shipped.  
High ceiling types 1 and 2 will be set for remote control operation.

## FXCQ-M7V1B

| INDOOR UNIT                |                     |   | 20             | 25    | 32           | 40          | 50           | 63      | 80            | 125   |
|----------------------------|---------------------|---|----------------|-------|--------------|-------------|--------------|---------|---------------|-------|
| Cooling capacity           | kW                  |   | 2.2            | 2.8   | 3.6          | 4.5         | 5.6          | 7.1     | 9.0           | 14.0  |
| Heating capacity           | kW                  |   | 2.5            | 3.2   | 4.0          | 5.0         | 6.3          | 8.0     | 10.0          | 16.0  |
| Nominal input              | cooling             | W | 77             | 92    | 92           | 130         | 130          | 161     | 209           | 256   |
|                            | heating             | W | 44             | 59    | 59           | 97          | 97           | 126     | 176           | 233   |
| Dimensions (HxWxD)         | mm                  |   | 305x780x600    |       |              | 305x995x600 |              |         | 305x1,670x600 |       |
| Weight                     | kg                  |   | 26             |       |              | 31          | 32           | 35      | 47            | 48    |
| Air flow rate (H/L)        | m <sup>3</sup> /min |   | 7/5            | 9/6.5 | 9/6.5        | 12/9        | 12/9         | 16.5/13 | 26/21         | 33/25 |
| Sound pressure level (H/L) | dB(A)               |   | 33/28          | 35/29 | 35/29        | 35.5/30.5   | 35.5/30.5    | 38/33   | 40/35         | 45/39 |
| Sound power level          | dB(A)               |   | 45             | 50    | 50           | 50          | 50           | 52      | 54            | 60    |
| Refrigerant type           |                     |   | R-410A         |       |              |             |              |         |               |       |
| Power supply               | V1                  |   | 1~, 50Hz, 230V |       |              |             |              |         |               |       |
| Infrared remote control    | cooling             |   | BRC7C67        |       |              |             |              |         |               |       |
|                            | heating             |   | BRC7C62        |       |              |             |              |         |               |       |
| Wired remote control       |                     |   | BRC1D527       |       |              |             |              |         |               |       |
| DECORATION PANEL           |                     |   | BYBC32GIW1     |       | BYBC50GIW1   |             | BYBC63GIW1   |         | BYBC125GIW1   |       |
| Dimensions (HxWxD)         | mm                  |   | 53x1,030x680   |       | 53x1,245x680 |             | 53x1,430x680 |         | 53x1,920x680  |       |
| Weight                     | kg                  |   | 8              |       | 8.5          |             | 9.5          |         | 12            |       |