



FXCQ-M8



2-Way blow
ceiling mounted cassette

FXCQ20,25,32M8



- Slim unit can be installed in a ceiling void of only 355mm
- Easy installation: depth of all units is 600mm
- Auto-swing mechanism ensures even room air and temperature distribution and prevents ceiling soiling

- Quiet operation
- Leaves maximum floor and wall space for furniture and decorations
- Easy to clean flat suction grille

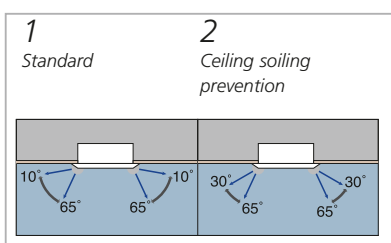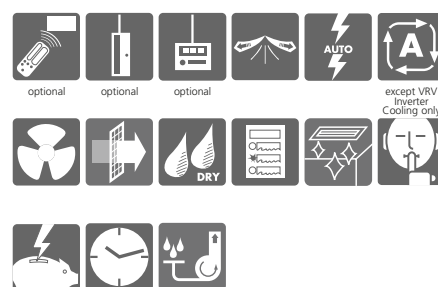

Note:
Set standard to 2-way discharge when shipped.
High ceiling types 1 and 2 will be set for remote control operation.

FXCQ-M8

INDOOR UNIT		20	25	32	40	50	63	80	125
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	14.0
Heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	10.0	16.0
Nominal input	cooling	77	92	92	130	130	161	209	256
	heating	44	59	59	97	97	126	176	233
Dimensions (HxWxD)	mm	305x780x600			305x995x600		305x1180x600	305x1670x600	
Weight	kg	26			31	32	35	47	48
Air flow rate (H/L)	m ³ /min	7/5	9/6.5	9/6.5	12/9	12/9	16.5/13	26/21	33/25
Sound pressure level (H/L)	dB(A)	33/28	35/29	35/29	35.5/30.5	35.5/30.5	38/33	40/35	45/39
Sound power level	dB(A)	45	50	50	50	50	52	54	60
Refrigerant type		R-410A							
Power supply	V1	1 ~, 50Hz, 230V							
Piping connections	liquid/gas	mm							
Infrared remote control	cooling	ø6.4/ø12.7				BRC7C67		ø9.5/ø15.9	
	heating					BRC7C62			
Wired remote control						BRC1D52			
DECORATION PANEL		BYBC32G/W1			BYBC50G/W1		BYBC63G/W1	BYBC125G/W1	
Dimensions (HxWxD)	mm	53x1,030x680			53x1,245x680		53x1,430x680	53x1,920x680	
Weight	kg	8			8.5		9.5	12	