





FXDQ-N

Slim concealed ceiling unit


FXDQ20-50NVE

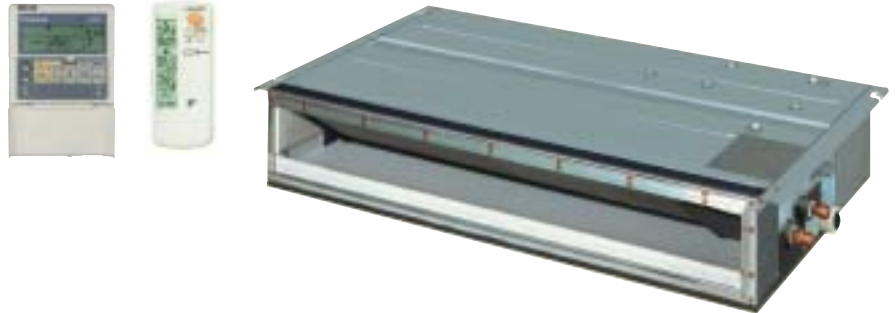



- Slim design for flexible installation



- Compact dimensions, can easily be mounted in a ceiling void of only 240mm



- Quiet operation: down to 29 dBA sound pressure level
- Blends unobtrusively with any interior décor
- Can be installed in both new and existing buildings
- Leaves maximum floor and wall space for furniture, decorations and fittings
- Medium external static pressure facilitates unit use with flexible ducts of varying lengths
- Drain-up pump with 750mm lift fitted as standard

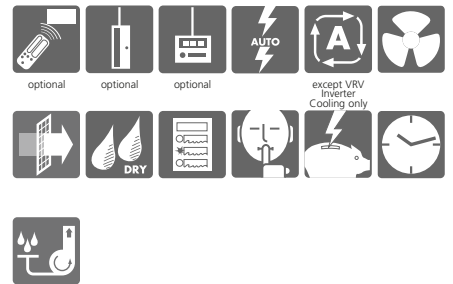

FXDQ-NVE

INDOOR UNIT		20	25	32	40	50	63	
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	
Heating capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	
Nominal input	Cooling	W	150	150	150	165	181	
	Heating	W	137	137	137	147	168	
Dimensions (HxWxD)	mm	200x900x620					200x1100x620	
Weight	kg	26	26	26	27	28	31	
Air flow rate (H/L)	m ³ /min	9.5/7.5	9.5/7.5	10.5/8.5	10.5/8.5	12.5/10.0	16.5/13.0	
Sound pressure level (H/L)	dB(A)	33/29	33/29	33/29	34/30	35/31	36/32	
Sound power level	dB(A)	*	*	*	*	*	*	
Refrigerant type		R-410A						
Power supply	VE	1~, 50Hz, 220-240V						
Infrared remote control	Cooling	BRCAC64						
	Heating	BRCAC62						
Wired remote control		BRC1D527, BRC2A51, BRC3A61						

* Sound power levels were not available at time of publication