



FXDQ-P/NA


Slim concealed ceiling unit

FXDQ20-32P


new





- Slim design for flexible installation



- Compact dimensions, can easily be mounted in a ceiling void of only 240mm



- Quiet operation: down to 29 dBA sound pressure level
- Blends unobtrusively with any interior décor
- Can be installed in both new and existing buildings
- Leaves maximum floor and wall space for furniture, decorations and fittings
- Medium external static pressure facilitates unit use with flexible ducts of varying lengths
- Drain-up pump with 750mm lift fitted as standard

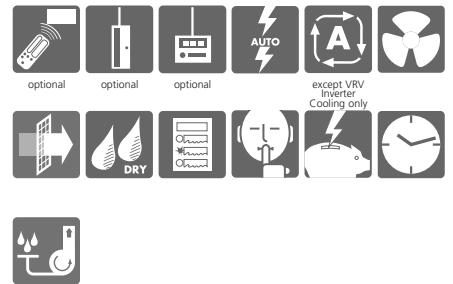

			new	new	new			
INDOOR UNIT			FXDQ20P	FXDQ25P	FXDQ32P	FXDQ40NA	FXDQ50NA	FXDQ63NA
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0
Nominal input	Cooling	W	150	150	150	160	165	181
	Heating	W	137	137	137	147	152	168
Dimensions (HxWxD)		mm	200x700x620			200x900x620		200x1100x620
Weight		kg	23	23	23	27	28	31
Air flow rate (H/L)		m ³ /min	8.0/6.4	8.0/6.4	8.0/6.4	10.5/8.5	12.5/10.0	16.5/13.0
Sound pressure level (H/L)		dB(A)	33/29	33/29	33/29	34/30	35/31	36/32
Sound power level		dB(A)	*	*	*	*	*	*
Refrigerant type			R-410A					
Power supply		VE	1 ~, 50Hz, 220-240V					
Piping connections	liquid/gas	mm	ø6.4/ø12.7					ø9.5/ø15.9
Infrared remote control	Cooling		BRC4C64					
	Heating		BRC4C62					
Wired remote control			BRC1D52, BRC2A51, BRC3A61					

* Sound power levels were not available at time of publication