



# FXDQ-P/NA

## Slim Concealed Ceiling Unit




BRC1D52

BRC4C64/C62

FXDQ20-32P

- Slim design for flexible installation
- Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- Quiet operation: down to 29 dBA sound pressure level
- Blends unobtrusively with any interior décor
- Can be installed in both new and existing buildings.
- Leaves maximum floor and wall space for furniture, decorations and fittings
- Medium external static pressure facilitates unit use with flexible ducts of varying lengths

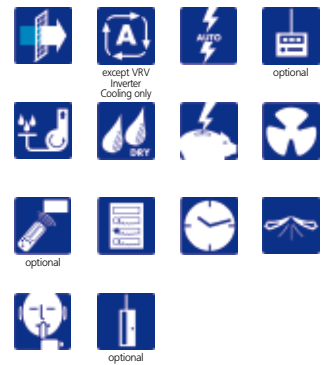

### FXDQ-PVE/FXDQ-NAVE

| Indoor Units       |                          |          | FXDQ20PVE                           | FXDQ25PVE | FXDQ32PVE | FXDQ40NAVE   | FXDQ50NAVE    | FXDQ63NAVE                          |  |
|--------------------|--------------------------|----------|-------------------------------------|-----------|-----------|--------------|---------------|-------------------------------------|--|
| Capacity           | Cooling                  | kw       | 2.20                                | 2.80      | 3.60      | 4.50         | 5.60          | 7.10                                |  |
|                    | Heating                  | kw       | 2.50                                | 3.20      | 4.00      | 5.00         | 6.30          | 8.00                                |  |
| Power input        | Cooling                  | kw       | 0.086                               |           | 0.089     | 0.160        | 0.165         | 0.181                               |  |
|                    | Heating                  | kw       | 0.067                               |           | 0.070     | 0.147        | 0.152         | 0.168                               |  |
| Dimensions         | (Height x Width x Depth) |          | 200x700x620                         |           |           | 200x900x620  |               | 200x1100x620                        |  |
| Weight             |                          |          | 23.0                                |           |           | 27.0         | 28.0          | 31.0                                |  |
| Air Flow Rate      | Cooling                  | High/Low | 8.0 / 6.4                           |           |           | 10.50 / 8.50 | 12.50 / 10.00 | 16.50 / 13.00                       |  |
| Sound Pressure     | Cooling                  | High/Low | 33.0 / 29.0                         |           |           | 34.0 / 30.0  | 35.0 / 31.0   | 36.0 / 32.0                         |  |
| Refrigerant        |                          |          | R-410A                              |           |           |              |               |                                     |  |
| Power Supply       |                          |          | 1~/220-240V/50Hz                    |           |           |              |               |                                     |  |
| Piping connections | Liquid (OD)/Gas/Drain    | mm       | 6.4 / 12.7 / VP20 (I.D. 20/O.D. 26) |           |           |              |               | 9.5 / 15.9 / VP20 (I.D. 20/O.D. 26) |  |