



FXDQ-P/NA

Slim Concealed Ceiling Unit




BRC1D52

BRC4C64/C62

FXDQ20-32P

- Slim design for flexible installation
- Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- Quiet operation: down to 29 dBA sound pressure level
- Blends unobtrusively with any interior décor
- Can be installed in both new and existing buildings.
- Leaves maximum floor and wall space for furniture, decorations and fittings
- Medium external static pressure facilitates unit use with flexible ducts of varying lengths

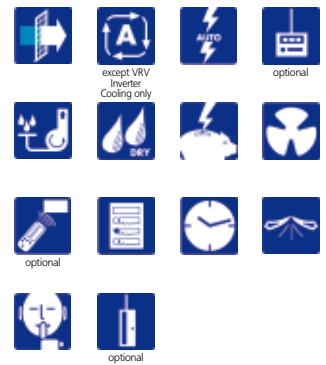

FXDQ-PVE/FXDQ-NAVE

Indoor Units			FXDQ20PVE	FXDQ25PVE	FXDQ32PVE	FXDQ40NAVE	FXDQ50NAVE	FXDQ63NAVE	
Capacity	Cooling	kw	2.20	2.80	3.60	4.50	5.60	7.10	
	Heating	kw	2.50	3.20	4.00	5.00	6.30	8.00	
Power input	Cooling	kw	0.086		0.089	0.160	0.165	0.181	
	Heating	kw	0.067		0.070	0.147	0.152	0.168	
Dimensions	(Height x Width x Depth)		200x700x620			200x900x620		200x1100x620	
Weight			23.0			27.0	28.0	31.0	
Air Flow Rate	Cooling	High/Low	8.0 / 6.4			10.50 / 8.50	12.50 / 10.00	16.50 / 13.00	
Sound Pressure	Cooling	High/Low	33.0 / 29.0			34.0 / 30.0	35.0 / 31.0	36.0 / 32.0	
Refrigerant			R-410A						
Power Supply			1~/220-240V/50Hz						
Piping connections	Liquid (OD)/Gas/Drain	mm	6.4 / 12.7 / VP20 (I.D. 20/O.D. 26)					9.5 / 15.9 / VP20 (I.D. 20/O.D. 26)	