



FXDQ-PVE/NAVE

Slim Concealed Ceiling Unit



BRC1D52




BRC4C64/C62




FXDQ20-32PVE

- Slim design for flexible installation

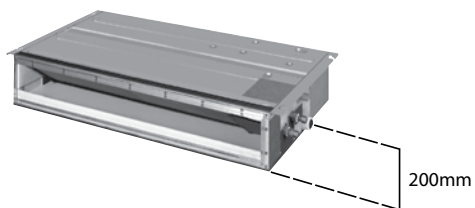

- Compact dimensions, 200mm height
- Quiet operation: down to 29 dBA sound pressure level
- Adjustable external static pressure
- Optional discharge flangers available

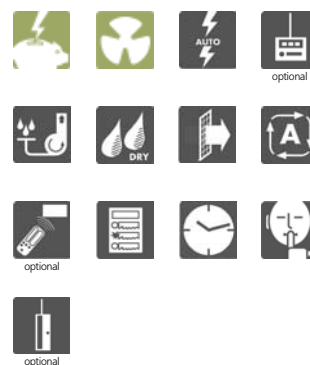

FXDQ-PVE/FXDQ-NAVE

Indoor Units				FXDQ20PVE	FXDQ25PVE	FXDQ32PVE	FXDQ40NAVE	FXDQ50NAVE	FXDQ63NAVE	
Capacity	Cooling	kw		2.20	2.80	3.60	4.50	5.60	7.10	
	Heating	kw		2.50	3.20	4.00	5.00	6.30	8.00	
Power input	Cooling	kw		0.086		0.089	0.160	0.165	0.181	
	Heating	kw		0.067		0.070	0.147	0.152	0.168	
Dimensions	(Height x Width x Depth)		mm	200x700x620			200x900x620		200x1,100x620	
Weight			kg	23.0			27.0	28.0	31.0	
Air Flow Rate	Cooling	High/Low	m ³ /min	8.0 / 6.4			10.50 / 8.50	12.50 / 10.00	16.50 / 13.00	
Sound Pressure	Cooling	High/Low	dBA	33.0 / 29.0			34.0 / 30.0	35.0 / 31.0	36.0 / 32.0	
Refrigerant	R-410A									
Power Supply	1~/220-240V/50Hz									
Piping connections	Liquid (OD)/Gas/Drain	mm	6.4 / 12.7 / VP20 (I.D. 20/O.D. 26)						9.5 / 15.9 / VP20 (I.D. 20/O.D. 26)	