




Air Conditioners

Technical Data



Slim concealed ceiling unit

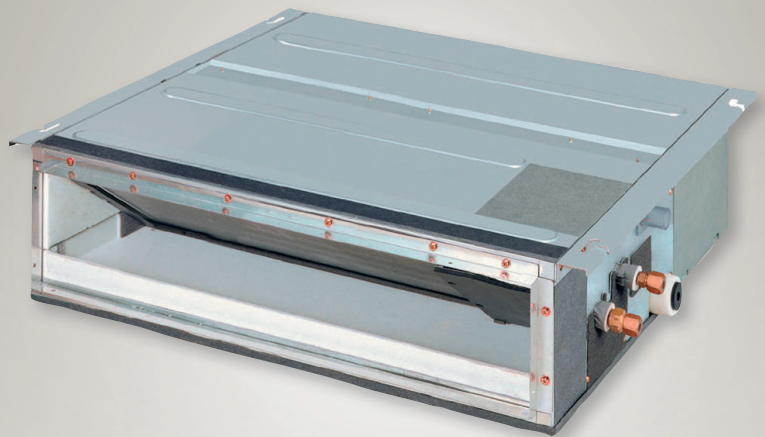

EEDEN11-204

FXDQ-P7



Air Conditioners

Technical Data



Slim concealed ceiling unit



EEDEN11-204

FXDQ-P7

TABLE OF CONTENTS

FXDQ-P7

1	Specifications	2
	Technical Specifications	2
	Electrical Specifications	3
2	Electrical data	4
	Electrical Data	4
3	Safety device settings	5
	Safety Device Settings	5
4	Options	6
	Options	6
5	Capacity tables	7
	Cooling Capacity Tables	7
	Heating Capacity Tables	9
	Capacity Correction Factor	11
6	Dimensional drawings	12
	Dimensional Drawings	12
7	Centre of gravity	14
	Centre of Gravity	14
8	Piping diagrams	16
	Piping Diagrams	16
9	Wiring diagrams	17
	Wiring Diagrams - Single Phase	17
10	Sound data	18
	Sound Pressure Spectrum	18
11	Fan characteristics	20
	Fan Characteristics	20

1 Specifications

1-1 Technical Specifications				FXDQ15P7VEB	FXDQ20P7VEB	FXDQ25P7VEB	FXDQ32P7VEB	FXDQ40P7VEB	FXDQ50P7VEB	FXDQ63P7VEB		
Cooling capacity	Nom.		kW	1.7 (1)	2.2 (1)	2.8 (1)	3.6 (1)	4.5 (1)	5.6 (1)	7.1 (1)		
Heating capacity	Nom.		kW	1.9 (2)	2.5 (2)	3.2 (2)	4.0 (2)	5.0 (2)	6.3 (2)	8.0 (2)		
Power input - 50Hz	Cooling	Nom.	kW	0.086			0.089	0.160	0.165	0.181		
	Heating	Nom.	kW	0.067			0.070	0.147	0.152	0.168		
Power input - 60Hz	Cooling	Nom.	kW	0.092			0.095	0.182	0.185	0.192		
	Heating	Nom.	kW	0.073			0.076	0.168	0.170	0.179		
Casing	Colour			Unpainted								
	Material			Galvanised steel								
Dimensions	Unit	Height	mm	200								
		Width	mm	700				900		1,100		
		Depth	mm	620								
	Packed unit	Height	mm	260								
		Width	mm	944				1,144		1,344		
		Depth	mm	785								
Required ceiling void >			mm	240								
Weight	Unit		kg	23				27	28	31		
	Packed unit		kg	31				35	36	40		
Heat exchanger	Length		mm	500				700	900			
	Rows	Quantity		2			3					
	Fin pitch		mm	1.5								
	Passes	Quantity		3			6					
	Face area		m ²	0.126				0.176	0.227			
	Stages	Quantity		12								
	Empty tubeplate hole	Quantity		0			4	0				
	Tube type		ø7 Hi-XSS									
	Fin	Type		Symmetric waffle louvre								
		Treatment		Hydrophilic								
Fan	Type		Sirocco fan									
	Quantity		1									
	Air flow rate - 50Hz	Cooling	Super high	m ³ /min	-	8.0			10.5	12.5	16.5	
			High	m ³ /min	7.5	7.2			9.5	11.0	14.5	
			Nom.	m ³ /min	7.0	-						
			Low	m ³ /min	6.4				8.5	10.0	13.0	
	Air flow rate - 60Hz	Cooling	Super high	m ³ /min	-	8.0			10.5	12.5	16.5	
			High	m ³ /min	7.5	7.2			9.5	11.0	14.5	
			Nom.	m ³ /min	7.0	-						
			Low	m ³ /min	6.4				8.5	10.0	13.0	
	External static pressure - 50Hz	High	Pa	30				44				
		Nom.	Pa	10				15				
	External static pressure - 60Hz	High	Pa	30				44				
Nom.		Pa	10				15					
Fan motor	Quantity		1									
	Output	High	W	62				130				
	Drive		Direct drive									
Sound power level	Cooling	Nom.	dBA	50	51			52	53	54		
Sound pressure level	Cooling	High	dBA	32	33			34	35	36		
		Nom.	dBA	31				32	33	34		
		Low	dBA	29				30	31	32		
Refrigerant	Type		R-410A									
	Control		Electronic expansion valve									
Piping connections	Liquid	Type		Flare connection								
		OD	mm	6.35				9.52				
	Gas	Type		Flare connection								
		OD	mm	12.7				15.9				
	Drain		VP20 (I.D. 20/O.D. 26)									
Heat insulation		Both liquid and gas pipes										
Air filter			Removable / washable / mildew proof									

1 Specifications

1-1 Technical Specifications			FXDQ15P7VEB	FXDQ20P7VEB	FXDQ25P7VEB	FXDQ32P7VEB	FXDQ40P7VEB	FXDQ50P7VEB	FXDQ63P7VEB
Drain-up height		mm	600						
Safety devices	Item	01	Fuse						
		02	Fan motor thermal protection						

1-2 Electrical Specifications			FXDQ15P7VEB	FXDQ20P7VEB	FXDQ25P7VEB	FXDQ32P7VEB	FXDQ40P7VEB	FXDQ50P7VEB	FXDQ63P7VEB
Power supply	Name		-	VE					
	Phase		-	1~					
	Frequency	Hz	50/60						
	Voltage	V	220-240/220						
Voltage range	Min.	%	-10						
	Max.	%	10						
Current - 50Hz	Minimum circuit amps (MCA)	A	0.8			1.0		1.1	
	Maximum fuse amps (MFA)	A	16	15					
	Full load amps (FLA) Total	A	0.6			0.8		0.9	
Current - 60Hz	Minimum circuit amps (MCA)	A	0.9			1.1		1.3	
	Maximum fuse amps (MFA)	A	16	15					
	Full load amps (FLA) Total	A	0.7			0.9		1.0	

Notes

- (1) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 5m; level difference: 0m
- (2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m; level difference: 0m
- (3) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.
- (4) External static pressure is changeable to set by the remote control (from standard to high, see installation manual)
- (5) The operation sound levels are conversion values in anechoic chamber. In practice, sound levels tend to be higher than the specified values due to ambient noise or reflection.
The sound level will increase by ± 5dBA when the suction place is changed to bottom suction.
- (6) Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
- (7) Maximum allowable voltage range variation between phases is 2%.
- (8) MCA/MFA: MCA = 1.25 x FLA
- (9) MFA ≤ 4 x FLA
- (10) Next lower standard fuse rating minimum 15A
- (11) Select wire size based on the value of MCA
- (12) Instead of a fuse, use a circuit breaker

2 Electrical data

2 - 1 Electrical Data

FXDQ-P7

Model	Power supply				IFM		Input (W)		
	Hz	Volts	Voltage range	MCA	MFA	kW	FLA	Cooling	Heating
FXDQ15P7	50	220-240V	Max. 264V Min. 198V	0,8	16	0,062	0,6	86	67
FXDQ20P7				0,8		0,062	0,6	86	67
FXDQ25P7				0,8		0,062	0,6	86	67
FXDQ32P7				0,8		0,062	0,6	89	70
FXDQ40P7				1,0		0,062	0,8	160	147
FXDQ50P7				1,0		0,13	0,8	165	152
FXDQ60P7				1,1		0,13	0,9	181	168
FXDQ15P7	60	220V	Max. 242V Min. 198V	0,9	16	0,062	0,7	92	73
FXDQ20P7				0,9		0,062	0,7	92	73
FXDQ25P7				0,9		0,062	0,7	92	73
FXDQ32P7				0,9		0,062	0,7	95	76
FXDQ40P7				1,1		0,062	0,9	182	168
FXDQ50P7				1,3		0,13	1,0	185	170
FXDQ63P7				1,4		0,13	1,1	192	179

SYMBOLS

MCA : Min. Circuit Amps. (A)
MFA : Max. Fuse Amps. (See note 5)
kW : Fan Motor Rated Output (kW)
FLA : Full Load Amps. (A)
IFM : Indoor Fan Motor

NOTES

- Voltage range
Units are suitable for use on electrical systems where voltage supplied to unit terminals is not below or above listed range limits.
- Maximum allowable voltage unbalance between phases is 2%.
- MCA/MFA
MCA = 1,25 x FLA
MFA ≤ 4 x FLA
(Next lower standard fuse rating. Min. 15A)
- Select wire size based on the MCA.
- Instead of fuse, use circuit breaker.

4TW32901-4

3 Safety device settings

3 - 1 Safety Device Settings

FXDQ-P7	
	Safety devices
	PC board (A1P) fuse Fan motor thermal protector
FXDQ15P7	250V 5A OFF: 130±5°C OFF ON: 83±15°C ON
FXDQ20P7	
FXDQ25P7	
FXDQ32P7	
FXDQ40P7	
FXDQ50P7	
FXDQ63P7	

4TW32901-2

4 Options

4 - 1 Options

Kit name		Model		
		FXDQ15P7 - FXDQ20P7 FXDQ25P7 - FXDQ32P7	FXDQ40P7 FXDQ50P7	FXDQ63P7
Wired remote control		BRC1D52 / BRC1D61 (1) / BRC1E51A		
Wireless remote control	H/P	BRC4C65		
	C/O	BRC4C66		
Simplified remote control		BRC2C51		
Remote control for hotel use		BRC3A61		
Central remote control		DCS302CA51 / DCS302CA61 (1)		
Unified on/off control		DCS301BA51 / DCS301BA61 (1)		
Schedule timer		DST301BA51 / DST301BA61 (1)		
Adapter for wiring		KRP1B56		
Wiring adapter for electrical appendices 1		KRP2A53		
Wiring adapter for electrical appendices 2		KRP4A54		
Remote sensor		KRCS01-1B		
Installation box for adapter PCB		KRP1BA101		
Electrical box with earth terminal	2 blocks	KJB212AA		
	3 blocks	KJB311AA		
Noise filter (for electromagnetic interference use only)		KEK26-1A		
External control adapter for outdoor unit (must be installed on indoor units)		DTA104A53		
Multi tenant		EKMTAC		
Insulation kit for high humidity		KDT25N32	KDT25N50	KDT25N63

NOTES

1. For DAME only

4TW32909-1

5 Capacity tables

5 - 1 Cooling Capacity Tables

FXDQ15-63P7		Indoor air temp.													
Unit size	Outdoor °CDB	14.0WB		16.0WB		18.0WB		19.0WB		20.0WB		22.0WB		24.0WB	
		20.0DB		23.0DB		26.0DB		27.0DB		28.0DB		30.0DB		32.0DB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
15	10.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.2	1.5
	12.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.2	1.5
	14.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.2	1.5
	16.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.1	1.5
	18.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.1	1.5
	20.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.1	1.5
	21.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.0	1.5
	23.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.0	1.4
	25.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	2.0	1.5	2.0	1.4
	27.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	1.9	1.4	2.0	1.4
	29.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	1.9	1.4	1.9	1.4
	31.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	1.9	1.4	1.9	1.4
	33.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.5	1.9	1.4	1.9	1.4
	35.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.4	1.8	1.4	1.9	1.4
37.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.4	1.8	1.4	1.8	1.3	
39.0	1.1	1.1	1.4	1.3	1.6	1.4	1.7	1.5	1.8	1.4	1.8	1.3	1.8	1.3	
20	10.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.9	2.0
	12.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.9	2.0
	14.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.8	1.9
	16.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.8	1.9
	18.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.7	1.9
	20.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.7	1.9
	21.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.7	1.9
	23.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.6	1.9
	25.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.6	1.8	2.6	1.9
	27.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.5	1.8	2.6	1.9
	29.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.5	1.8	2.5	1.8
	31.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.4	1.7	2.5	1.8
	33.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.4	1.7	2.5	1.8
	35.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.4	1.7	2.4	1.8
37.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.3	1.9	2.3	1.7	2.4	1.8	
39.0	1.5	1.4	1.8	1.6	2.1	1.8	2.2	1.9	2.2	1.9	2.3	1.6	2.3	1.8	
25	10.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.7	2.3
	12.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.6	2.2
	14.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.6	2.2
	16.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.5	2.2
	18.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.5	2.2
	20.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.4	2.2
	21.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.4	2.2	3.4	2.2
	23.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.3	2.2	3.4	2.1
	25.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.3	2.2	3.3	2.1
	27.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.2	2.2	3.3	2.1
	29.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.2	2.1	3.2	2.1
	31.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.1	2.1	3.2	2.1
	33.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.1	2.1	3.1	2.1
	35.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	3.0	2.2	3.0	2.1	3.1	2.0
37.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	2.9	2.2	3.0	2.0	3.0	2.0	
39.0	1.9	1.6	2.3	1.9	2.6	2.1	2.8	2.1	2.9	2.1	2.9	2.0	3.0	2.0	
32	10.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.3	2.8	4.7	2.9
	12.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.3	2.8	4.7	2.9
	14.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.3	2.8	4.6	2.8
	16.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.3	2.8	4.6	2.8
	18.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.3	2.8	4.5	2.8
	20.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.3	2.8	4.4	2.8
	21.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.3	2.8	4.4	2.7
	23.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.2	2.8	4.3	2.7
	25.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.2	2.7	4.3	2.7
	27.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.1	2.7	4.2	2.7
	29.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.1	2.7	4.2	2.6
	31.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	4.0	2.6	4.1	2.6
	33.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	3.9	2.6	4.0	2.6
	35.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.8	2.7	3.9	2.6	4.0	2.5
37.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.7	2.6	3.8	2.6	3.9	2.5	
39.0	2.4	2.0	2.9	2.3	3.4	2.4	3.6	2.6	3.7	2.6	3.8	2.5	3.8	2.5	

5 Capacity tables

5 - 1 Cooling Capacity Tables

FXDQ15-63P7		TC: Total Capacity; kW - SHC: Sensible heat capacity; kW													
Unit size	Outdoor °CDB	Indoor air temp.													
		14.0WB		16.0WB		18.0WB		19.0WB		20.0WB		22.0WB		24.0WB	
		20.0DB		23.0DB		26.0DB		27.0DB		28.0DB		30.0DB		32.0DB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
40	10.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.4	3.3	5.9	3.5
	12.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.4	3.3	5.8	3.5
	14.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.4	3.3	5.8	3.5
	16.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.4	3.3	5.7	3.5
	18.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.4	3.3	5.6	3.4
	20.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.4	3.3	5.5	3.4
	21.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.4	3.3	5.5	3.4
	23.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.3	3.3	5.4	3.3
	25.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.2	3.3	5.3	3.3
	27.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.2	3.2	5.3	3.3
	29.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.1	3.2	5.2	3.3
	31.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	5.0	3.2	5.1	3.2
	33.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.8	3.2	4.9	3.2	5.0	3.2
	35.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.7	3.2	4.9	3.1	5.0	3.2
37.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.7	3.2	4.8	3.1	4.9	3.1	
39.0	3.0	2.5	3.6	2.8	4.2	3.3	4.5	3.3	4.6	3.2	4.7	3.1	4.8	3.1	
50	10.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.7	4.2	7.4	4.1
	12.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.7	4.2	7.3	4.1
	14.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.7	4.2	7.2	4.1
	16.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.7	4.2	7.1	4.0
	18.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.7	4.2	7.0	4.0
	20.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.7	4.2	6.9	4.0
	21.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.7	4.2	6.8	4.0
	23.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.6	4.2	6.7	3.9
	25.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.5	4.1	6.6	3.9
	27.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.4	4.1	6.6	3.9
	29.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.3	4.0	6.5	3.8
	31.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.2	4.0	6.4	3.8
	33.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	6.0	4.0	6.1	4.0	6.3	3.8
	35.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	5.9	4.0	6.0	3.9	6.2	3.7
37.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	5.8	4.0	5.9	3.9	6.1	3.7	
39.0	3.8	3.1	4.5	3.5	5.2	3.9	5.6	4.0	5.7	3.9	5.8	3.9	6.0	3.7	
63	10.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.5	5.1	9.3	5.7
	12.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.5	5.1	9.2	5.6
	14.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.5	5.1	9.1	5.5
	16.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.5	5.1	9.0	5.4
	18.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.5	5.1	8.8	5.4
	20.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.5	5.1	8.7	5.3
	21.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.5	5.1	8.7	5.3
	23.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.4	5.1	8.5	5.2
	25.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.3	5.0	8.4	5.1
	27.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.1	5.0	8.3	5.1
	29.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	8.0	4.9	8.2	5.0
	31.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	7.9	4.9	8.1	4.9
	33.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.6	4.9	7.8	4.8	7.9	4.9
	35.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.5	4.8	7.7	4.8	7.8	4.8
37.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.4	4.8	7.5	4.7	7.7	4.8	
39.0	4.8	3.8	5.7	4.3	6.6	4.8	7.1	4.9	7.2	4.7	7.4	4.7	7.6	4.7	

5 Capacity tables

5 - 2 Heating Capacity Tables

FXDQ15-63P7								
Unit size	Outdoor air temp.		On coil temp.: °C DB					
	°CDB	°CWB	16.0 kW	18.0 kW	20.0 kW	21.0 kW	22.0 kW	24.0 kW
15	-19,8	-20,0	1,1	1,1	1,1	1,1	1,1	1,1
	-18,8	-19,0	1,2	1,2	1,1	1,1	1,1	1,1
	-16,7	-17,0	1,2	1,2	1,2	1,2	1,2	1,2
	-13,7	-15,0	1,3	1,3	1,3	1,3	1,3	1,3
	-11,8	-13,0	1,4	1,4	1,3	1,3	1,3	1,3
	-9,8	-11,0	1,4	1,4	1,4	1,4	1,4	1,4
	-9,5	-10,0	1,5	1,5	1,5	1,4	1,4	1,4
	-8,5	-9,1	1,5	1,5	1,5	1,5	1,5	1,5
	-7,0	-7,6	1,5	1,5	1,5	1,5	1,5	1,5
	-5,0	-5,6	1,6	1,6	1,6	1,6	1,6	1,6
	-3,0	-3,7	1,7	1,7	1,7	1,7	1,7	1,7
	0,0	-0,7	1,8	1,8	1,8	1,8	1,8	1,8
	3,0	2,2	1,9	1,9	1,9	1,8	1,8	1,7
	5,0	4,1	1,9	1,9	1,9	1,8	1,8	1,7
	7,0	6,0	2,0	2,0	1,9	1,8	1,8	1,7
	9,0	7,9	2,1	2,0	1,9	1,8	1,8	1,7
11,0	9,8	2,1	2,0	1,9	1,8	1,8	1,7	
13,0	11,8	2,1	2,0	1,9	1,8	1,8	1,7	
15,0	13,7	2,1	2,0	1,9	1,8	1,8	1,7	
20	-19,8	-20,0	1,5	1,5	1,5	1,5	1,5	1,5
	-18,8	-19,0	1,5	1,5	1,5	1,5	1,5	1,5
	-16,7	-17,0	1,6	1,6	1,6	1,6	1,6	1,6
	-13,7	-15,0	1,7	1,7	1,7	1,7	1,7	1,7
	-11,8	-13,0	1,8	1,8	1,8	1,8	1,8	1,8
	-9,8	-11,0	1,9	1,9	1,9	1,9	1,9	1,9
	-9,5	-10,0	1,9	1,9	1,9	1,9	1,9	1,9
	-8,5	-9,1	2,0	2,0	1,9	1,9	1,9	1,9
	-7,0	-7,6	2,0	2,0	2,0	2,0	2,0	2,0
	-5,0	-5,6	2,1	2,1	2,1	2,1	2,1	2,1
	-3,0	-3,7	2,2	2,2	2,2	2,2	2,2	2,2
	0,0	-0,7	2,3	2,3	2,3	2,3	2,3	2,2
	3,0	2,2	2,5	2,5	2,4	2,4	2,3	2,2
	5,0	4,1	2,5	2,5	2,5	2,4	2,3	2,2
	7,0	6,0	2,6	2,6	2,5	2,4	2,3	2,2
	9,0	7,9	2,7	2,7	2,5	2,4	2,3	2,2
11,0	9,8	2,8	2,7	2,5	2,4	2,3	2,2	
13,0	11,8	2,8	2,7	2,5	2,4	2,3	2,2	
15,0	13,7	2,8	2,7	2,5	2,4	2,3	2,2	
25	-19,8	-20,0	1,9	1,9	1,9	1,9	1,9	1,9
	-18,8	-19,0	1,9	1,9	1,9	1,9	1,9	1,9
	-16,7	-17,0	2,1	2,1	2,0	2,0	2,0	2,0
	-13,7	-15,0	2,2	2,2	2,2	2,2	2,2	2,1
	-11,8	-13,0	2,3	2,3	2,3	2,3	2,3	2,3
	-9,8	-11,0	2,4	2,4	2,4	2,4	2,4	2,4
	-9,5	-10,0	2,5	2,4	2,4	2,4	2,4	2,4
	-8,5	-9,1	2,5	2,5	2,5	2,5	2,5	2,5
	-7,0	-7,6	2,6	2,6	2,6	2,6	2,6	2,6
	-5,0	-5,6	2,7	2,7	2,7	2,7	2,7	2,7
	-3,0	-3,7	2,8	2,8	2,8	2,8	2,8	2,8
	0,0	-0,7	3,0	3,0	3,0	3,0	3,0	2,8
	3,0	2,2	3,1	3,1	3,1	3,1	3,0	2,8
	5,0	4,1	3,3	3,2	3,2	3,1	3,0	2,8
	7,0	6,0	3,4	3,4	3,2	3,1	3,0	2,8
	9,0	7,9	3,5	3,4	3,2	3,1	3,0	2,8
11,0	9,8	3,6	3,4	3,2	3,1	3,0	2,8	
13,0	11,8	3,6	3,4	3,2	3,1	3,0	2,8	
15,0	13,7	3,6	3,4	3,2	3,1	3,0	2,8	
32	-19,8	-20,0	2,4	2,4	2,3	2,3	2,3	2,3
	-18,8	-19,0	2,4	2,4	2,4	2,4	2,4	2,4
	-16,7	-17,0	2,6	2,6	2,6	2,6	2,6	2,5
	-13,7	-15,0	2,7	2,7	2,7	2,7	2,7	2,7
	-11,8	-13,0	2,9	2,8	2,8	2,8	2,8	2,8
	-9,8	-11,0	3,0	3,0	3,0	3,0	3,0	3,0
	-9,5	-10,0	3,1	3,1	3,1	3,1	3,0	3,0
	-8,5	-9,1	3,1	3,1	3,1	3,1	3,1	3,1
	-7,0	-7,6	3,2	3,2	3,2	3,2	3,2	3,2
	-5,0	-5,6	3,4	3,4	3,4	3,4	3,4	3,4
	-3,0	-3,7	3,5	3,5	3,5	3,5	3,5	3,5
	0,0	-0,7	3,7	3,7	3,7	3,7	3,7	3,5
	3,0	2,2	3,9	3,9	3,9	3,9	3,7	3,5
	5,0	4,1	4,1	4,1	4,0	3,9	3,7	3,5
	7,0	6,0	4,2	4,2	4,0	3,9	3,7	3,5
	9,0	7,9	4,3	4,3	4,0	3,9	3,7	3,5
11,0	9,8	4,5	4,3	4,0	3,9	3,7	3,5	
13,0	11,8	4,5	4,3	4,0	3,9	3,7	3,5	
15,0	13,7	4,5	4,3	4,0	3,9	3,7	3,5	

5 Capacity tables

5 - 2 Heating Capacity Tables

FXDQ15-63P7

Unit size	Outdoor air temp.		On coil temp.: °C DB					
			16.0	18.0	20.0	21.0	22.0	24.0
	°CDB	°CWB	kW	kW	kW	kW	kW	kW
40	-19.8	-20.0	3.0	2.9	2.9	2.9	2.9	2.9
	-18.8	-19.0	3.0	3.0	3.0	3.0	3.0	3.0
	-16.7	-17.0	3.2	3.2	3.2	3.2	3.2	3.2
	-13.7	-15.0	3.4	3.4	3.4	3.4	3.4	3.4
	-11.8	-13.0	3.6	3.6	3.6	3.5	3.5	3.5
	-9.8	-11.0	3.7	3.7	3.7	3.7	3.7	3.7
	-9.5	-10.0	3.8	3.8	3.8	3.8	3.8	3.8
	-8.5	-9.1	3.9	3.9	3.9	3.9	3.9	3.9
	-7.0	-7.6	4.0	4.0	4.0	4.0	4.0	4.0
	-5.0	-5.6	4.2	4.2	4.2	4.2	4.2	4.2
	-3.0	-3.7	4.4	4.4	4.4	4.4	4.4	4.4
	0.0	-0.7	4.7	4.6	4.6	4.6	4.6	4.4
	3.0	2.2	4.9	4.9	4.9	4.8	4.7	4.4
	5.0	4.1	5.1	5.1	5.0	4.8	4.7	4.4
	7.0	6.0	5.2	5.2	5.0	4.8	4.7	4.4
	9.0	7.9	5.4	5.3	5.0	4.8	4.7	4.4
11.0	9.8	5.6	5.3	5.0	4.8	4.7	4.4	
13.0	11.8	5.6	5.3	5.0	4.8	4.7	4.4	
15.0	13.7	5.6	5.3	5.0	4.8	4.7	4.4	
50	-19.8	-20.0	3.7	3.7	3.7	3.7	3.7	3.7
	-18.8	-19.0	3.8	3.8	3.8	3.8	3.8	3.8
	-16.7	-17.0	4.1	4.0	4.0	4.0	4.0	4.0
	-13.7	-15.0	4.3	4.3	4.3	4.2	4.2	4.2
	-11.8	-13.0	4.5	4.5	4.5	4.5	4.5	4.5
	-9.8	-11.0	4.7	4.7	4.7	4.7	4.7	4.7
	-9.5	-10.0	4.8	4.8	4.8	4.8	4.8	4.8
	-8.5	-9.1	4.9	4.9	4.9	4.9	4.9	4.9
	-7.0	-7.6	5.1	5.1	5.1	5.1	5.1	5.1
	-5.0	-5.6	5.3	5.3	5.3	5.3	5.3	5.3
	-3.0	-3.7	5.5	5.5	5.5	5.5	5.5	5.5
	0.0	-0.7	5.9	5.9	5.8	5.8	5.8	5.5
	3.0	2.2	6.2	6.2	6.2	6.1	5.9	5.5
	5.0	4.1	6.4	6.4	6.3	6.1	5.9	5.5
	7.0	6.0	6.6	6.6	6.3	6.1	5.9	5.5
	9.0	7.9	6.8	6.7	6.3	6.1	5.9	5.5
11.0	9.8	7.0	6.7	6.3	6.1	5.9	5.5	
13.0	11.8	7.1	6.7	6.3	6.1	5.9	5.5	
15.0	13.7	7.1	6.7	6.3	6.1	5.9	5.5	
63	-19.8	-20.0	4.7	4.7	4.7	4.7	4.7	4.7
	-18.8	-19.0	4.9	4.9	4.8	4.8	4.8	4.8
	-16.7	-17.0	5.1	5.1	5.1	5.1	5.1	5.1
	-13.7	-15.0	5.4	5.4	5.4	5.4	5.4	5.4
	-11.8	-13.0	5.7	5.7	5.7	5.7	5.7	5.7
	-9.8	-11.0	6.0	6.0	6.0	6.0	6.0	5.9
	-9.5	-10.0	6.1	6.1	6.1	6.1	6.1	6.1
	-8.5	-9.1	6.3	6.3	6.2	6.2	6.2	6.2
	-7.0	-7.6	6.5	6.5	6.4	6.4	6.4	6.4
	-5.0	-5.6	6.8	6.7	6.7	6.7	6.7	6.7
	-3.0	-3.7	7.0	7.0	7.0	7.0	7.0	7.0
	0.0	-0.7	7.5	7.4	7.4	7.4	7.4	7.0
	3.0	2.2	7.9	7.8	7.8	7.7	7.5	7.0
	5.0	4.1	8.1	8.1	8.0	7.7	7.5	7.0
	7.0	6.0	8.4	8.4	8.0	7.7	7.5	7.0
	9.0	7.9	8.7	8.5	8.0	7.7	7.5	7.0
11.0	9.8	8.9	8.5	8.0	7.7	7.5	7.0	
13.0	11.8	9.0	8.5	8.0	7.7	7.5	7.0	
15.0	13.7	9.0	8.5	8.0	7.7	7.5	7.0	

3TW32902-3

5 Capacity tables

5 - 3 Capacity Correction Factor

FXDQ-P7/N7

Product name		3 outdoor multi combination								Single and 2 outdoor multi combination							
		20°CDB 14°CWB	23°CDB 16°CWB	26°CDB 18°CWB	27°CDB 19°CWB	28°CDB 20°CWB	30°CDB 22°CWB	32°CDB 24°CWB	20°CDB 14°CWB	23°CDB 16°CWB	26°CDB 18°CWB	27°CDB 19°CWB	28°CDB 20°CWB	30°CDB 22°CWB	32°CDB 24°CWB		
FXDQ20P7	TC	0.685	0.694	0.755	0.778	0.802	0.833	0.855	0.550	0.565	0.583	0.621	0.658	0.714	0.752		
	SHF	1.124	1.176	1.118	1.094	1.074	1.053	1.048	1.124	1.218	1.272	1.212	1.166	1.109	1.090		
FXDQ25P7	TC	0.685	0.694	0.755	0.778	0.802	0.833	0.855	0.550	0.565	0.583	0.621	0.658	0.714	0.752		
	SHF	1.124	1.176	1.118	1.094	1.074	1.053	1.048	1.124	1.218	1.272	1.212	1.166	1.109	1.090		
FXDQ32P7	TC	0.688	0.703	0.754	0.770	0.788	0.818	0.840	0.551	0.573	0.587	0.619	0.645	0.692	0.730		
	SHF	1.130	1.171	1.122	1.101	1.083	1.065	1.055	1.130	1.219	1.273	1.220	1.179	1.129	1.106		
FXDQ40N7	TC	0.677	0.699	0.758	0.780	0.798	0.826	0.857	0.545	0.558	0.587	0.625	0.657	0.705	0.750		
	SHF	1.155	1.169	1.113	1.090	1.074	1.062	1.043	1.155	1.249	1.262	1.204	1.162	1.120	1.091		
FXDQ50N7	TC	0.680	0.698	0.758	0.781	0.799	0.830	0.857	0.547	0.561	0.587	0.625	0.657	0.710	0.754		
	SHF	1.143	1.169	1.113	1.090	1.073	1.063	1.047	1.143	1.235	1.262	1.204	1.162	1.120	1.096		
FXDQ63N7	TC	0.673	0.708	0.767	0.793	0.812	0.839	1.862	0.541	0.561	0.601	0.641	0.674	0.725	0.763		
	SHF	1.153	1.158	1.106	1.083	1.069	1.059	1.046	1.153	1.242	1.244	1.189	1.152	1.114	1.093		

4TW27232-9


NOTES

- How to use this table.
 Capacity: Total capacity for High sensible mode = Total capacity for normal capacity table X TC ratio.
 SHF: SHF for High sensible mode = SHF for normal capacity table X SHF ratio.
 In case of SHF is bigger than 1, SHF is "1"

6 Dimensional drawings

6 - 1 Dimensional Drawings

FXDQ15-32P7

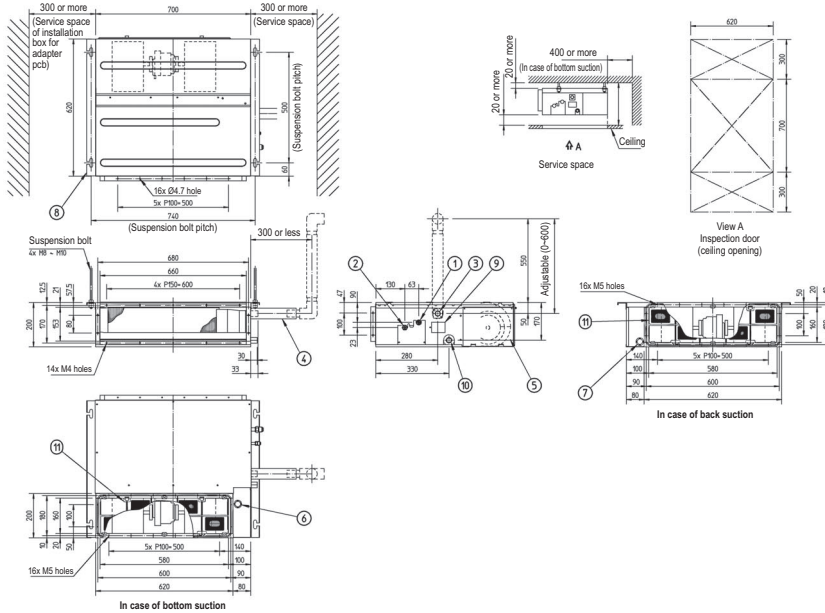


3TW32904-1

No.	Parts name	Description
1	Liquid pipe connection	ø 6.4 flare connection
2	Gas pipe connection	ø 12.7 flare connection
3	Drain pipe connection	VP20 (OD ø 26, ID ø 20)
4	Drain hose (accessory)	ID ø 25 (outlet)
5	Control box	
6	Transmission wiring connection	
7	Power supply connection	
8	Suspension bracket	
9	Inspection cover	
10	Socket for drain	
11	Air filter (accessory)	

NOTES

- In case of back suction, mount chamber cover to bottom side of the unit. In case of bottom suction, mount chamber cover to back side of the unit.
- Location of unit name plate: control box cover.
- Mount the air filter at the suction side. (Use an air filter whose dust collecting efficiency is at least 50% in a gravimetric technique). It can not be equipped with air filter (accessory) when connecting duct to suction side.

FXDQ40-50P7

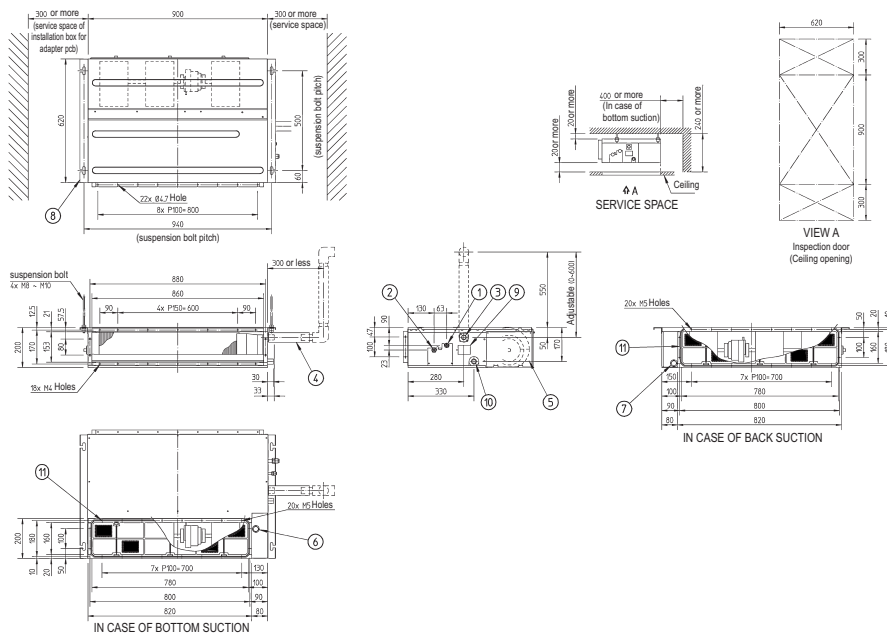

3TW32934-1

Nr	Name	Description
1	Liquid pipe connection	Ø 6.4 Flare connection
2	Gas pipe connection	Ø 12.7 Flare connection
3	Drain pipe connection	VP20 (OD Ø 26, ID Ø 20)
4	Drain hose (accessory)	ID Ø 25 (Outlet)
5	Control box	-
6	Transmission wiring connection	-
7	Power supply connection	-
8	Suspension Bracket	-
9	Inspection Cover	-
10	Socket for drain	-
11	Air filter (Accessory)	-

NOTES

- In case of back suction, mount chamber cover to bottom side of the unit. In case of bottom suction, mount chamber cover to back side of the unit.
- Location of unit name plate: control box cover.
- Mount the air filter at the suction side. (Use an air filter whose dust collecting efficiency is at least 50% in a gravimetric technique). It can not be equipped with air filter (Accessory) when connecting duct to suction side.

6 Dimensional drawings

6 - 1 Dimensional Drawings

FXDQ63P7

IN CASE OF BOTTOM SUCTION

IN CASE OF BACK SUCTION

VIEW A
Inspection door (Ceiling opening)

SERVICE SPACE

NOTES

- In case of back suction, mount chamber cover to bottom side of the unit.
In case of bottom suction, mount chamber cover to back side of the unit.
- Location of unit name plate: control box cover.
- Mount the air filter at the suction side. (Use an air filter whose dust collecting efficiency is at least 50%. In a gravimetric technique). It can not be equipped with air filter (Accessory) when connecting duct to suction side.


Nr	Name	Description
1	Liquid pipe connection	Ø 9.5 Flare connection
2	Gas pipe connection	Ø 15.9 Flare connection
3	Drain pipe connection	VP20 (OD Ø 26. ID Ø 20)
4	Drain hose (accessory)	ID Ø 25 (Outlet)
5	Control box	-
6	Transmission wiring connection	-
7	Power supply connection	-
8	Suspension Bracket	-
9	Inspection Cover	-
10	Socket for drain	-
11	Air filter (Accessory)	-

3TW32954-1

7 Centre of gravity


7 - 1 Centre of Gravity

FXDQ15-32P7

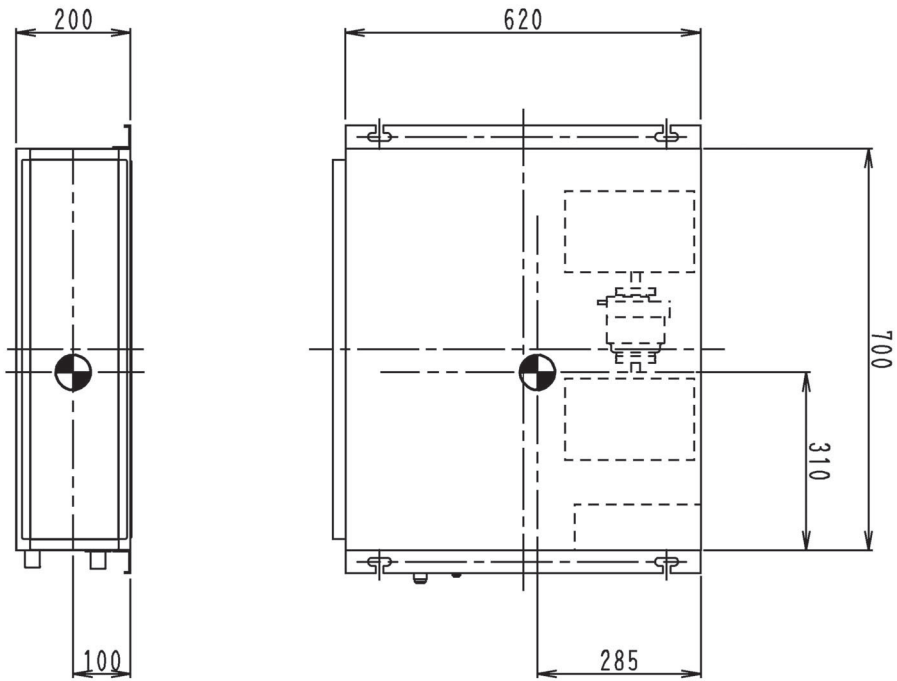

4D049300K


FXDQ40-50P7

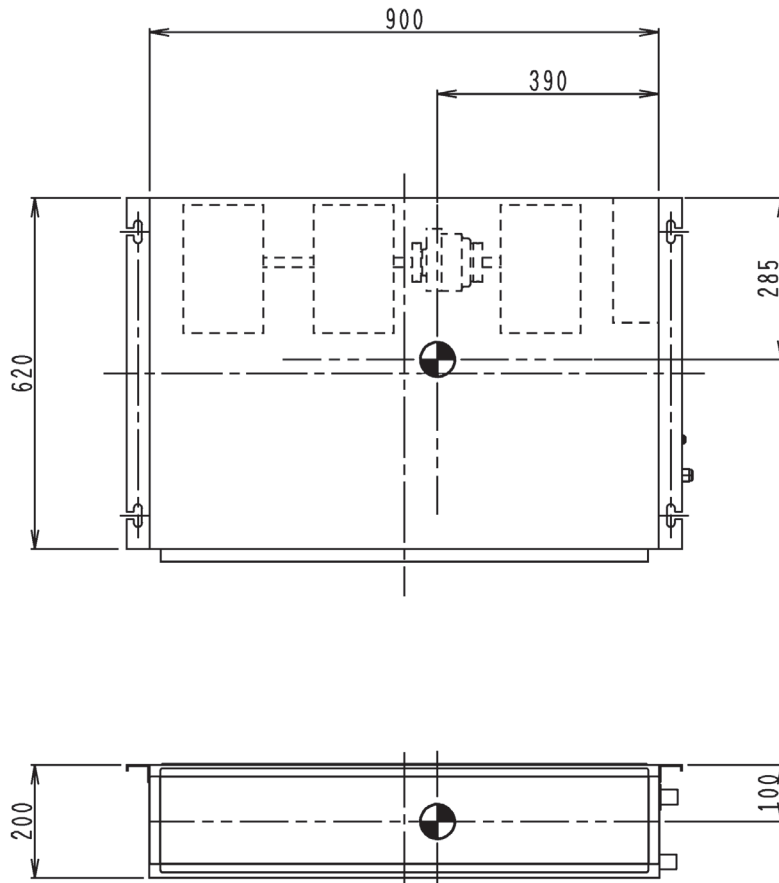

4D043886M


7 Centre of gravity

7 - 1 Centre of Gravity

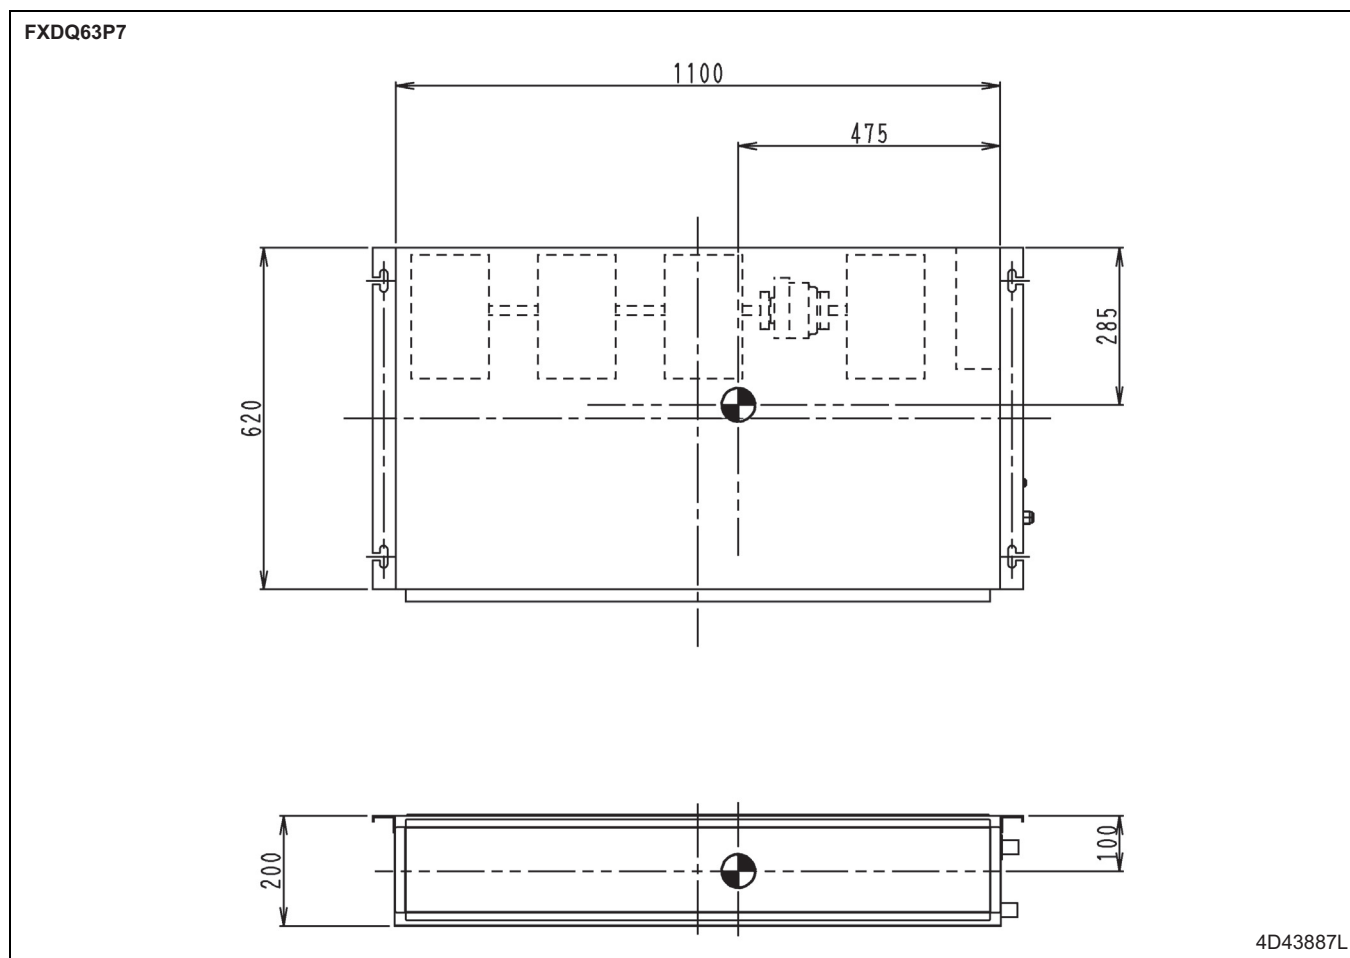

8 Piping diagrams


8 - 1 Piping Diagrams

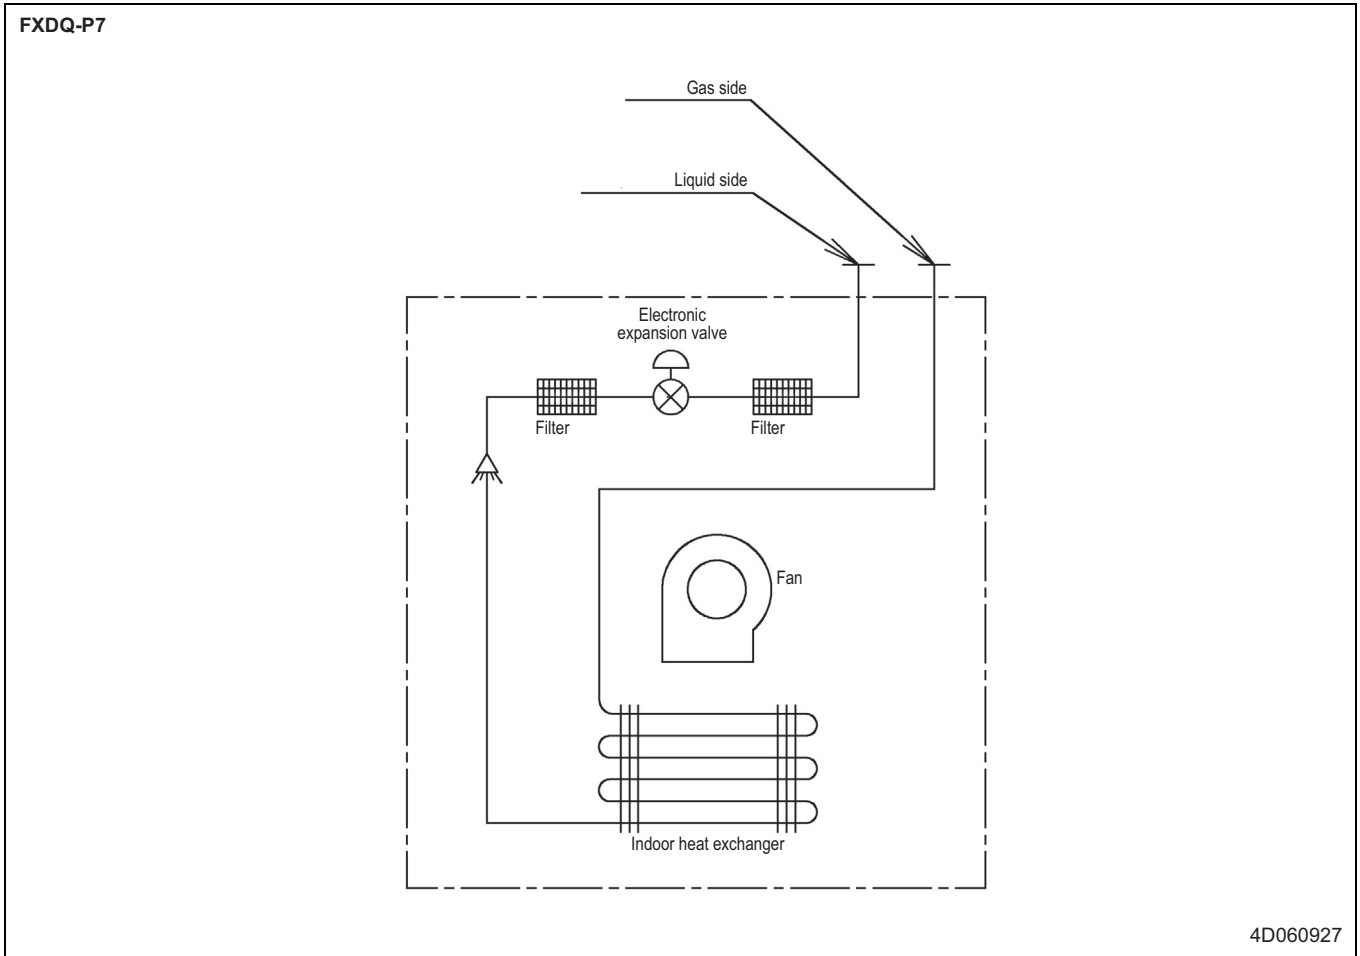

10 Sound data

10 - 1 Sound Pressure Spectrum

FXDQ15P7

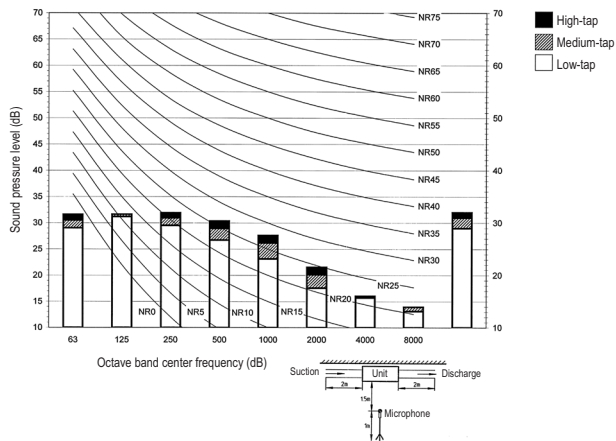


3TW33837-1

NOTES

1. Data is valid at free field condition.
2. Data is valid at nominal operation condition.
3. dBA = A-weighted sound pressure level. (A-scale according to IEC)
4. Reference acoustic pressures 0dB = 20μPa.

FXDQ20P7

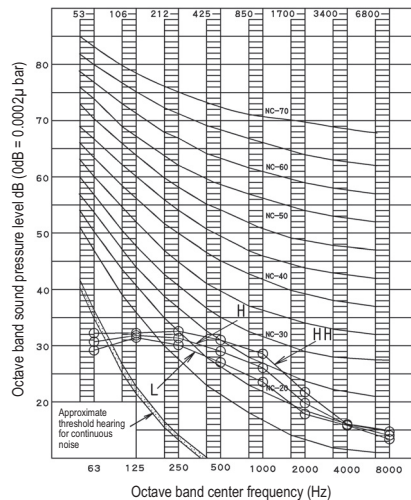


4D060945


NOTES

1. Over All (dB): (B,G,N is already rectified)
2. Operating conditions:
Power source: 220~240V 50Hz / 220V 60Hz
Cooling. Return air temperature: 27°CDB, 19°CWB. Outdoor temperature: 35°CDB, 24°CWB
Heating. Return air temperature: 20°CDB, 15°CWB. Outdoor temperature: 7°CDB, 6°CWB
3. Measuring place: Anechoic chamber
4. The operating condition is external static pressure 10 Pa. Operation noise differs with operation and ambient conditions.
5. Location of microphone.

Scale	Air Flow Rate		
	HH	H	L
A	33.0	31.0	29.0
C	39.0	37.5	36.0



FXDQ25P7

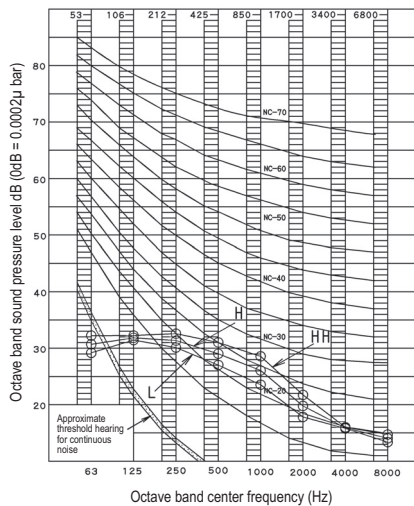


4D060946


NOTES

1. Over All (dB): (B,G,N is already rectified)
2. Operating conditions:
Power source: 220~240V 50Hz / 220V 60Hz
Cooling. Return air temperature: 27°CDB, 19°CWB. Outdoor temperature: 35°CDB, 24°CWB
Heating. Return air temperature: 20°CDB, 15°CWB. Outdoor temperature: 7°CDB, 6°CWB
3. Measuring place: Anechoic chamber
4. The operating condition is external static pressure 10 Pa. Operation noise differs with operation and ambient conditions.
5. Location of microphone.

Scale	Air Flow Rate		
	HH	H	L
A	33.0	31.0	29.0
C	39.0	37.5	36.0



FXDQ32P7

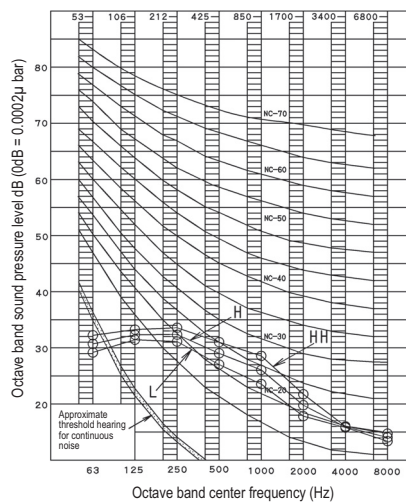


4D060947

NOTES




1. Over All (dB): (B,G,N is already rectified)
2. Operating conditions:
Power source: 220~240V 50Hz / 220V 60Hz
Cooling. Return air temperature: 27°CDB, 19°CWB. Outdoor temperature: 35°CDB, 24°CWB
Heating. Return air temperature: 20°CDB, 15°CWB. Outdoor temperature: 7°CDB, 6°CWB
3. Measuring place: Anechoic chamber
4. The operating condition is external static pressure 10 Pa. Operation noise differs with operation and ambient conditions.
5. Location of microphone.

Scale	Air Flow Rate		
	HH	H	L
A	33.0	31.0	29.0
C	39.0	37.5	36.0



10 Sound data


10 - 1 Sound Pressure Spectrum

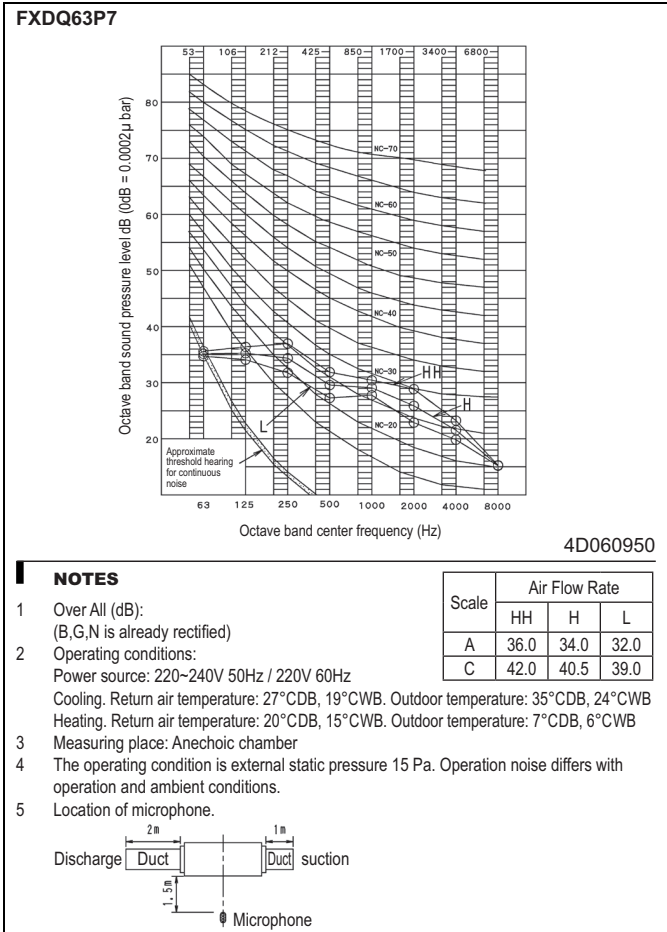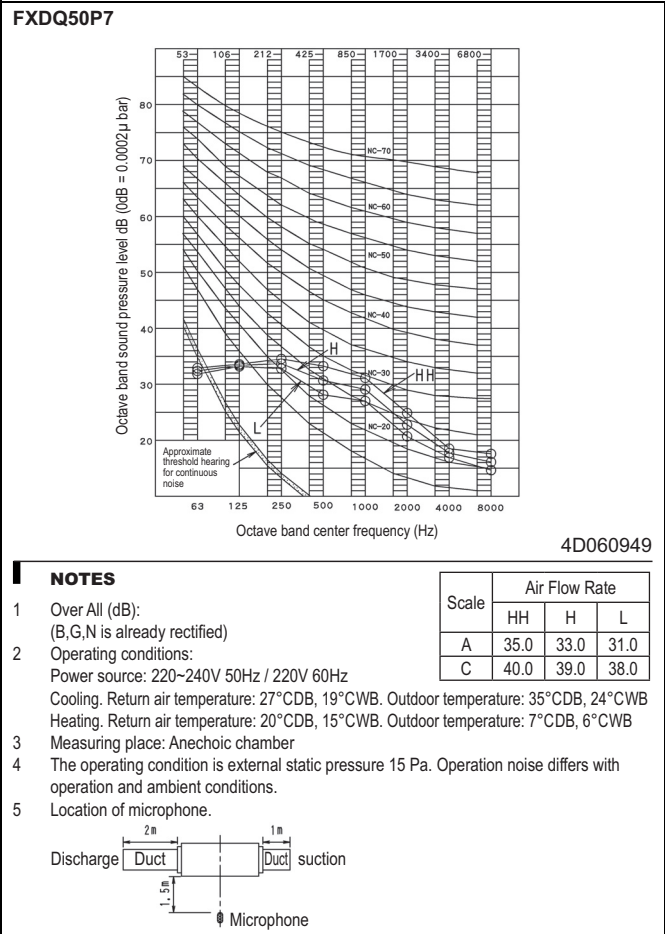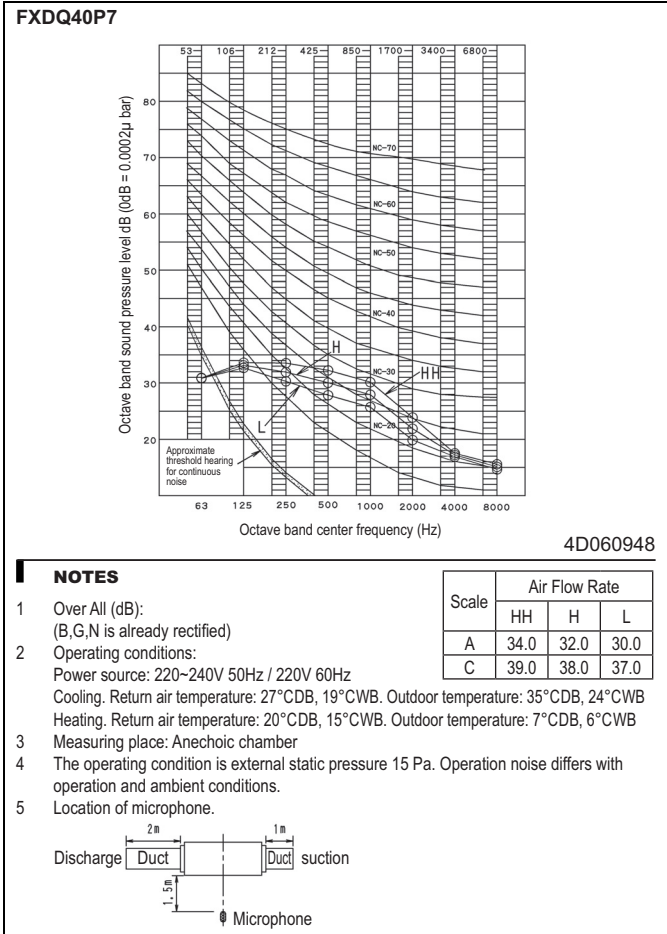

11 Fan characteristics

11 - 1 Fan Characteristics

FXDQ32P7

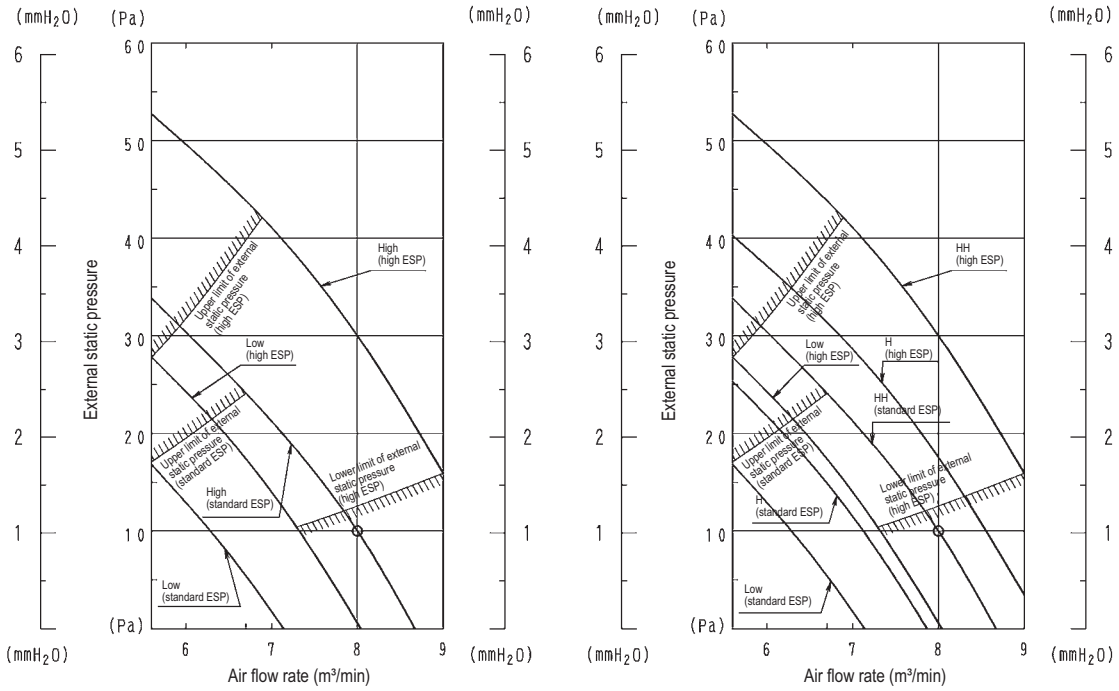


NOTES

1. The remote control can be used to switch between 'high' and 'low' ('HH', 'H' and 'L' for FXDQ-P7 model)
2. The air flow is set to 'standard' before leaving the factory.
it is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

3D052157B

FXDQ40P7

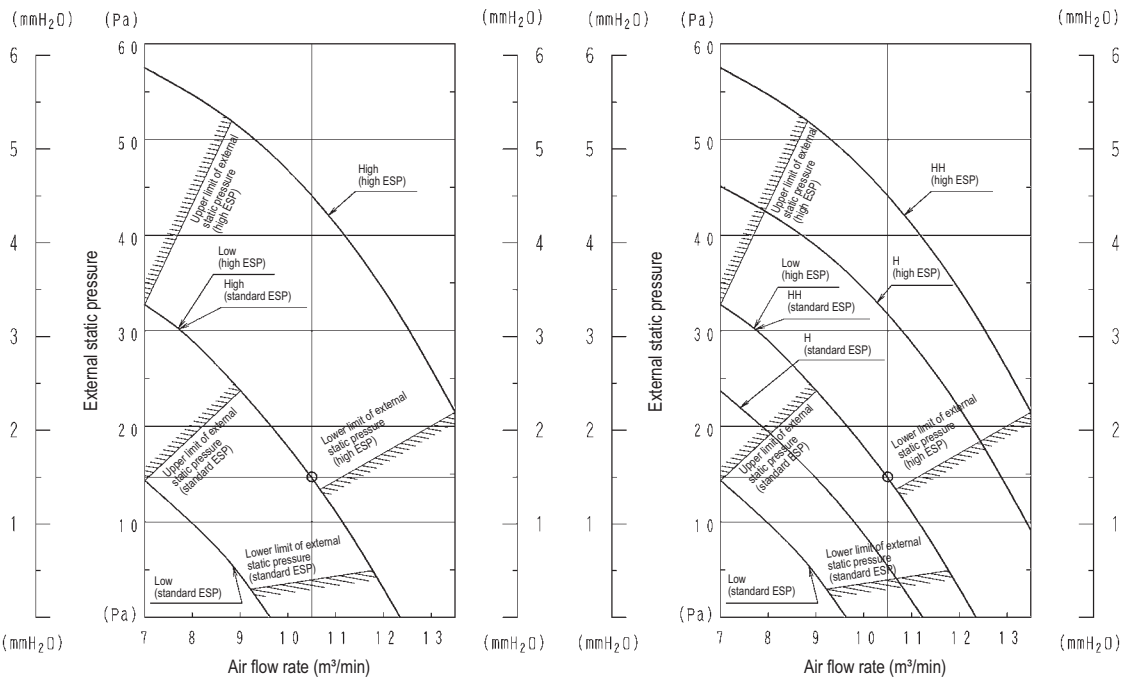

NOTES


1. The remote control can be used to switch between 'high' and 'low' ('HH', 'H' and 'L' for FXDQ-P7 model)
2. The air flow is set to 'standard' before leaving the factory.
It is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

3D046299D

11 Fan characteristics

11 - 1 Fan Characteristics

FXDQ50P7

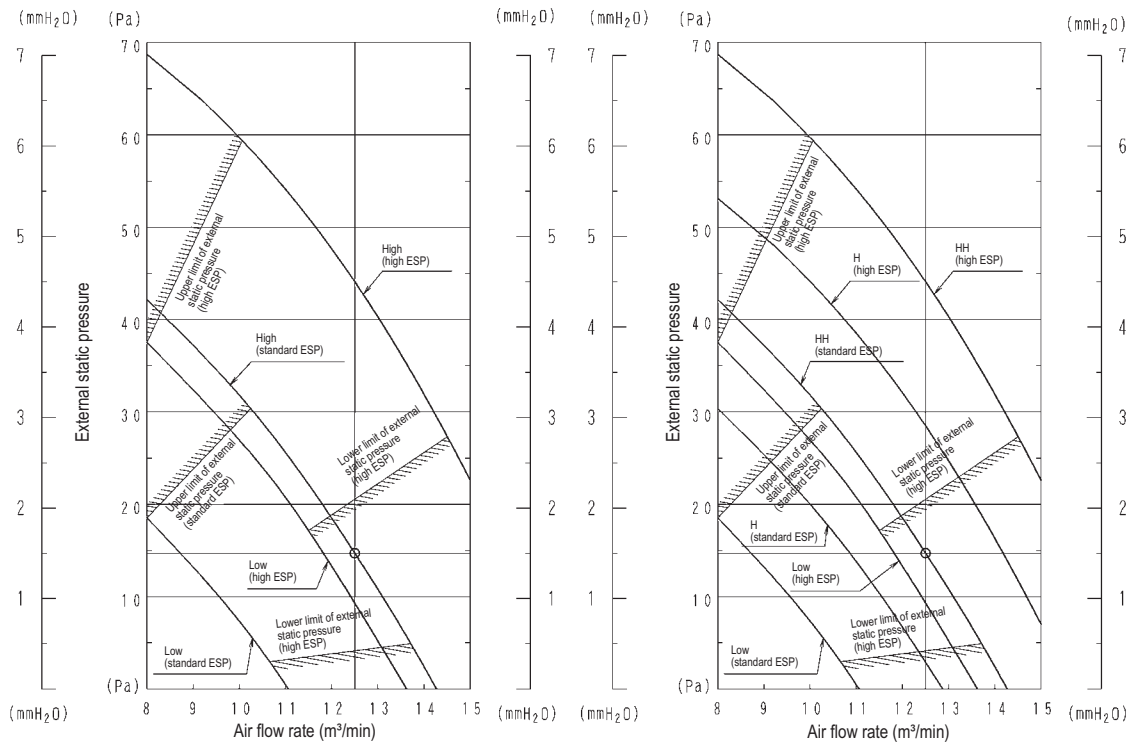


NOTES

1. The remote control can be used to switch between 'high' and 'low' ('HH', 'H' and 'L' for FXDQ-P7 model)
2. The air flow is set to 'standard' before leaving the factory.
it is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

3D046300D

FXDQ63P7

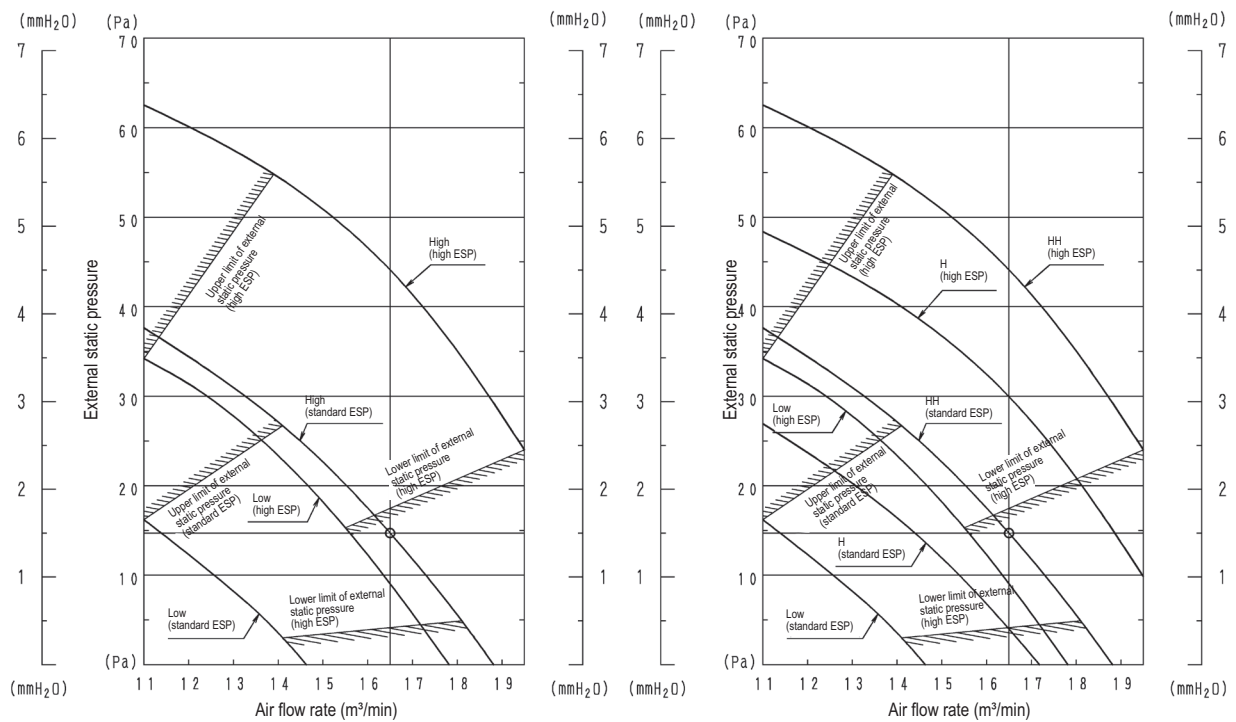

NOTES

1. The remote control can be used to switch between 'high' and 'low' ('HH', 'H' and 'L' for FXDQ-P7 model)
2. The air flow is set to 'standard' before leaving the factory.
It is possible to switch between 'standard ESP' and 'high ESP' by the remote control.

3D046301D

**In all of us,
a green heart**



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.

VRV® products are not within the scope of the Eurovent certification programme.



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Daikin products are distributed by:

