



FXDQ-P7


Slim concealed ceiling unit



BRC1E51




BRC4C65



FXDQ20-32P7

- Slim design for flexible installation
- Compact dimensions, can easily be mounted in a ceiling void of only 240mm
- 15 class unit especially developed for small or well-insulated rooms, such as hotel bedrooms, small offices
- Low noise: down to 29dBA sound pressure level
- Adjustable external static pressure
- Optional discharge flanger available
- Drain up pump with 750mm lift fitted as standard
- **BRC1E51A – new wired controller:** allows easy navigation through menu items, via a personalised display and minimal number of buttons. Provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible

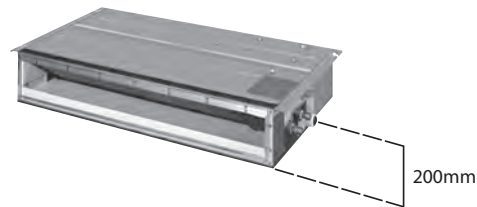

200mm

FXDQ-P7										
Indoor Units			15	20	25	32	40	50	63	
Capacity	Cooling	kW	1.5	2.20	2.80	3.60	4.50	5.60	7.10	
	Heating	kW	1.7	2.50	3.20	4.00	5.00	6.30	8.00	
Power input	Cooling	kW	-	0.086		0.089	0.160	0.165	0.181	
	Heating	kW	-	0.067		0.070	0.147	0.152	0.168	
Dimensions	(Height x Width x Depth)		200x700x620	200x700x620			200x900x620		200x1,100x620	
Weight			23.0	23.0			27.0	28.0	31.0	
Air flow rate	Cooling	HH/H/L	- / 7.5 / 6.5		8.0 / 7.2 / 6.4		10.5 / 9.5 / 8.5	12.5 / 11.0 / 10.0	16.50 / 14.5 / 13.00	
External static pressure	High/Standard		-		30 / 10		44 / 15			
Sound pressure	Cooling	HH/H/L	29 / 28 / 27		33.0 / 31.0 / 29.0		34.0 / 32.0 / 30.0	35.0 / 33.0 / 31.0	36.0 / 34.0 / 32.0	
Refrigerant			R-410A			R-410A				
Power supply			1~/220-240V/50Hz			1~/220-240V/50Hz				
Piping connections	Liquid (OD)/Gas/Drain (OD)		6.4 / 12.7 / 26.0		6.4 / 12.7 / 26.0				9.5 / 15.9 / 26.0	

* Note: grey cells contain preliminary data