



FXDQ15-32A



BRC1E52A/B BRC74C62



FXDQ-A

# Slim Concealed Ceiling Unit

VRV Indoor unit

The slim concealed unit has a very wide range of capacities to suit an array of applications from hotels to retail to offices.


The Daikin VRV indoor unit range is one of the widest on the market, offering no less than 26 stylish and elegant models in 116 different variants - all designed to maximise comfort, minimise operating noise and simplify installation and servicing.

Designed to fit rooms of any size and shape, Daikin indoor units are also user friendly, ultra reliable, easy to control and quiet in operation.

From January 2013, all indoor units will have to comply with the Ecodesign legislation on fans. As a market leader, Daikin has ensured that all indoors units comply with this legislation by adopting DC fans in all indoor units, improving their energy efficiency even further.

### Features and Benefits

- › Compact dimensions: can be mounted easily in a ceiling void of only 240mm
- › Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- › 15 class unit especially developed for small or well insulated rooms, such as hotel bedrooms and small offices
- › Low energy consumption thanks to DC fan motor
- › Medium external static pressure means unit can be used with flexible ducts of varying lengths
- › Standard drain pump with 750mm lift

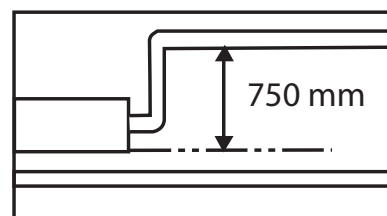

Indoor unit			FXDQ15A	FXDQ20A	FXDQ25A	FXDQ32A	FXDQ40A	FXDQ50A	FXDQ63A	
Cooling capacity	Nom.	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1	
Heating capacity	Nom.	kW	1.9	2.5	3.2	4.0	5.0	6.3	8.0	
Power input - 50Hz	Cooling	Nom.	to be confirmed							
	Heating	Nom.	to be confirmed							
Dimensions	Unit	HeightxWidthxDepth	200x700x620			200x950x620		200x1150x620		
Weight	Unit		22			26		29		
Fan-Air flow rate - 50Hz	Cooling	High/Med/Low	to be confirmed							
Air flow		High/Med/Low	7.5/7.0/6.4	8.0/7.2/6.4			10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0	
Sound power level	Cooling	Nom.	50	51			52	53	54	
Sound pressure level	Cooling	High/Nom./Low	32/31/29	33/31/29			34/32/28	35/33/29	36/34/30	
Refrigerant	Type		R-410A							
Piping connections	Liquid/OD/Gas/OD/Drain	mm	6.35/12.7/						9.52/15.90/	
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240							
Current - 50Hz	Maximum fuse amps (MFA)	A	to be confirmed							

See databook for option details.



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.



Daikin products are distributed by: