




FXFQ-P7VEB

Round Flow Cassette



- Modern style decoration panel in white (RAL9010)
- 360° air discharge ensures uniform air flow and temperature distribution
- Air discharge from the corners avoids dead zones that may be subject to temperature differences
- Comfortable horizontal air discharge ensures draughtfree operation and prevents ceiling soiling
- 23 different air flow patterns possible
- Fresh air intake: up to 20 %
- Reduced installation height: 214mm for class 20-63
- Easy visible drain check thanks to clear drain socket
- Drain-up pump with 850 mm filtered as standard.

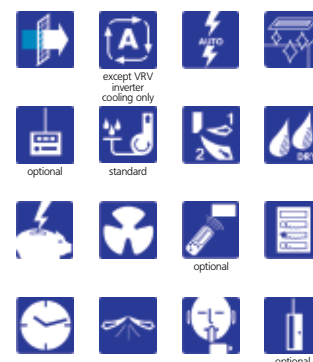

FXFQ-P7VEB

Indoor Units			20	25	32	40	50	63	80	100	125	
Capacity	Cooling	kw	2.20	2.80	3.60	4.50	5.60	7.10	9.00	11.20	14.00	
	Heating	kw	2.50	3.20	4.00	5.00	6.30	8.00	10.00	12.50	16.00	
Power input	Cooling	kw	0.053			0.063	0.083	0.095	0.120	0.173	0.258	
	Heating	kw	0.045			0.055	0.067	0.114	0.108	0.176	0.246	
Dimensions	(Height x Width x Depth)		mm	204x840x840					246x840x840		288x840x840	
Weight			kg	20			21		24		26	
Air Flow Rate	Cooling	High/Low	m³/min	12.5 / 9.0		13.5 / 9.0	15.5 / 10.0	16.5 / 11.0	23.5 / 14.5	26.5 / 17.0	33.0 / 20.0	
	Heating	High/Low	m³/min	12.5 / 9.0		13.5 / 9.0	15.0 / 9.5	17.5 / 12.0	23.5 / 14.5	28.0 / 17.5	33.0 / 20.0	
Sound power (nominal)	Cooling		dBA	49.0		50.0	51.0	52.0	55.0	58.0	61.0	
Sound Pressure	Cooling	High/Low	dBA	31.0 / 28.0		32.0 / 28.0	33.0 / 28.0	34.0 / 29.0	38.0 / 32.0	41.0 / 33.0	44.0 / 34.0	
	Heating	High/Low	dBA	31.0 / 28.0		32.0 / 28.0	33.0 / 28.0	36.0 / 30.0	38.0 / 32.0	42.0 / 34.0	44.0 / 34.0	
Refrigerant			R-410A									
Power Supply			1~/220-240V/50Hz									
Piping connections	Liquid (OD)/Gas/Drain	mm	6.35 / 12.7 / 32		6.40 / 12.7 / 32			9.5 / 15.9 / 32				
Decoration Panel	Model		BYCQ140CW1									
	Colour		RAL9010									
	HeightxWidthxDepth		mm	50x950x950								
	Weight		kg	5.5								