




FXHQ100A



BRC1E52A/B BRC7G53

- › Ideal solution for commercial spaces with no or low false ceilings
- › The unit can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- › Low energy consumption thanks to DC fan motor and drain pump
- › Stylish unit blends easily with any interior, as the flaps close entirely when not in operation
- › Can be installed in both new and existing buildings
- › Wider air discharge thanks to Coanda effect: up to 100°

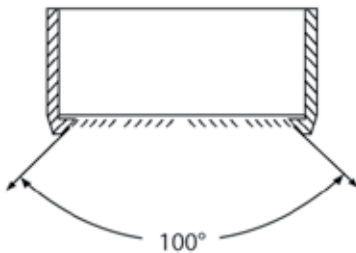

- › Air flow distribution for ceiling heights up to 3.8m without capacity loss



INDOOR UNIT				FXHQ32A	FXHQ63A	FXHQ100A
Cooling capacity	Nom.		kW	3.6	7.1	11.2
Heating capacity	Nom.		kW	4.0	8.0	12.5
Power input - 50Hz	Cooling	Nom.	kW	0.107	0.111	0.237
	Heating	Nom.	kW	0.107	0.111	0.237
Casing Colour				Fresh white (6.5Y 9.5/0.5)		
Dimensions	Unit	HeightxWidthxDepth	mm	235x960x690	235x1,270x690	235x1,590x690
Weight	Unit		kg	24	33	39
Fan-Air flow rate - 50Hz	Cooling	High/Nom./Low	m ³ /min	14/12/10	20/17/14	29.5/24/19
	Heating	High/Nom./Low	m ³ /min	14/12/10	20/17/14	29.5/24/19
Sound power level	Cooling	Nom.	dBA		-	
Sound pressure level	Cooling	High/Nom./Low	dBA	36/34/31	37/35/34	44/37/34
	Heating	High/Nom./Low	dBA	36/34/31	37/35/34	44/37/34
Refrigerant	Type			R-410A		
Piping connections	Liquid/OD/Gas/OD/Drain		mm	6.35/12.7/VP20 (I.D. 20/O.D. 26)		9.52/15.9/VP20 (I.D. 20/O.D. 26)
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240		
Current - 50Hz	Maximum fuse amps (MFA)		A	16		