



# FXXQ-MA

Ceiling mounted  
corner cassette



FXXQ63MA

new




- Specific design for use in rooms with shallow ceiling voids
- Auto-swing mechanism ensures even room air and temperature distribution
- Choice of 3 auto-swing positions for maximum comfort: standard, draught prevention or ceiling soiling prevention

- Optimum air flow conditions are created by either downward or frontal air discharge (via optional grille) or a combination of both

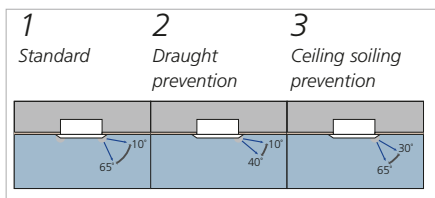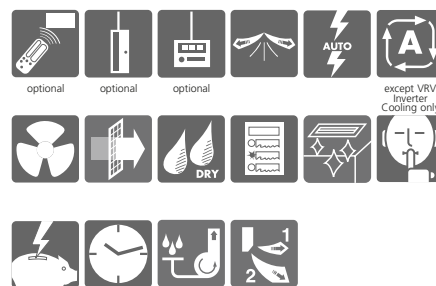

Note:  
Set standard to 1-way discharge when shipped.  
High ceiling types 1 and 2 will be set for remote control operation.

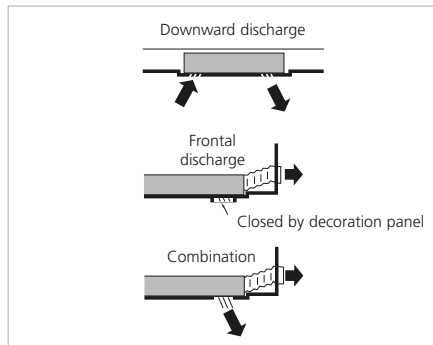

- Leaves maximum floor and wall space for furniture, decoration and fittings

## FXXQ-MA

INDOOR UNIT		25	32	40	63
Cooling capacity	kW	2.8	3.6	4.5	7.1
Heating capacity	kW	3.2	4.0	5.0	8.0
Nominal input	cooling	66	66	76	105
	heating	46	46	56	85
Dimensions (HxWxD)	mm	215x110x710		215x1310x710	
Weight	kg	31		34	
Air flow rate (H/L)	m <sup>3</sup> /min	11/9	11/9	13/10	18/15
Sound pressure level (H/L)(220V)	dB(A)	38/33	38/33	40/34	42/37
Sound power level	dB(A)	*	*	*	*
Refrigerant type		R-410A			
Power supply	VE	1~, 50Hz, 220-240V			
Piping connections	liquid/gas	ø6.4/ø12.7		ø9.5/ø15.9	
Infrared remote control	cooling	BRC4C63			
	heating	BRC4C61			
Wired remote control		BRC1D52			
<b>DECORATION PANEL</b>		BYK45BW1		BYK71BW1	
Dimensions (HxWxD)	mm	70x1240x800		70x1440x800	
Weight	kg	85		95	

\* Sound power levels were not available at time of publication