



FXKQ-MA



BRC1E52A/B BRC4C61



# FXKQ-MA Ceiling Mounted Corner Cassette

VRV Indoor unit

The ceiling mounted corner cassette is an ideal addition to a portfolio meeting specialist location requirements and at the same time maintaining the required visual appearance.

The Daikin VRV indoor unit range is one of the widest on the market, offering no less than 26 stylish and elegant models in 116 different variants - all designed to maximise comfort, minimise operating noise and simplify installation and servicing.


Designed to fit rooms of any size and shape, Daikin indoor units are also user friendly, ultra reliable, easy to control and quiet in operation.

From January 2013, all indoor units will have to comply with the Ecodesign legislation on fans. As a market leader, Daikin has ensured that all indoors units comply with this legislation by adopting DC fans in all indoor units, improving their energy efficiency even further.

### Features and Benefits

- › Compact dimensions: can be mounted easily in a narrow ceiling void (only 220mm of ceiling space required, or 195mm with a panel spacer, available as an accessory)

- › Optimum air flow conditions are created, either by downward air discharge, frontal air discharge (via optional grille) or a combination of both
- › Standard drain pump with 500mm lift

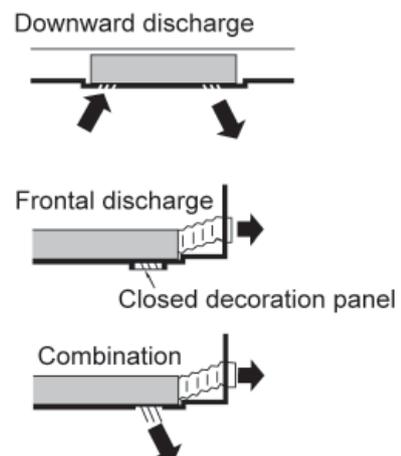

INDOOR UNIT			FXKQ25MA	FXKQ32MA	FXKQ40MA	FXKQ63MA
Cooling capacity	Nom.	kW	2.8	3.6	4.5	7.10
Heating capacity	Nom.	kW	3.2	4.0	5.0	8.00
Power input - 50Hz	Cooling	Nom.	0.066		0.076	0.105
	Heating	Nom.	0.046		0.056	0.085
Dimensions	Unit	HeightxWidthxDepth	215x1,110x710			215x1,310x710
Weight	Unit		31			34
Decoration panel	Model		BYK45FJW1			BYK71FJW1
	Colour		White			
	Dimensions	HeightxWidthxDepth	70x1,240x800			70x1,440x800
	Weight		8.5			9.5
Fan-Air flow rate - 50Hz	Cooling	High/Low	11/9		13/10	18/15
Sound power level	Cooling	Nom.	-			
Sound pressure level	Cooling	High/Low	38.0/33.0		40.0/34.0	42.0/37.0
Refrigerant	Type		R-410A			
Piping connections	Liquid/OD/Gas/OD/Drain	mm	6.35/12.7/VP25 (O.D. 32 / I.D. 25)			9.52/15.9/VP25 (O.D. 32 / I.D. 25)
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/60/220-240/220			
Current - 50Hz	Maximum fuse amps (MFA)	A	15			

See databook for option details.



Daikin's unique position as a manufacturer of air conditioning equipment, compressors and refrigerants has led to its close involvement in environmental issues. For several years Daikin has had the intention to become a leader in the provision of products that have limited impact on the environment. This challenge demands the eco design and development of a wide range of products and an energy management system, resulting in energy conservation and a reduction of waste.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.



Daikin products are distributed by: