FXLQ-MA

Floor Standing Unit

BRC1D52

BRC4C62

FXLQ20,25MA

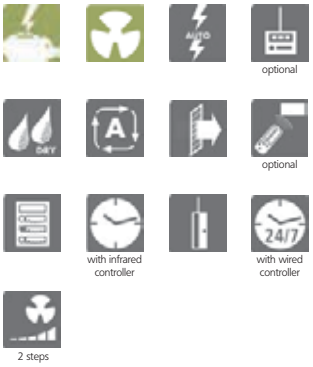

- Ideal for installation beneath a window
- Requires very little installation space
- Running the pipes from connections at the back, enables the unit to be wall mounted which in turn allows cleaning beneath the unit where dust tends to accumulate

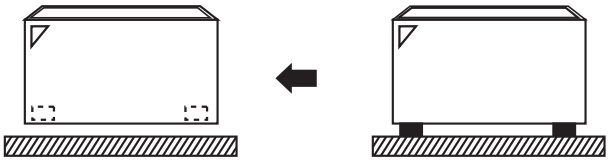

- Long life filter fitted as standard

FXLQ-MAVE									
Indoor Units				**20**	**25**	**32**	**40**	**50**	**63**
Capacity	Cooling		kw	2.20	2.80	3.60	4.50	5.60	7.10
	Heating		kw	2.50	3.20	4.00	5.00	6.30	8.00
Power input	Cooling		kw	0.049		0.090		0.110	
	Heating		kw	0.049		0.090		0.110	
Dimensions	(Height x Width x Depth)		mm	600x1000x222		600x1,140x222		600x1,420x222	
Weight			kg	25		30		36	
Air Flow Rate	Cooling	High/Low	m³/min	7.00 / 6.00		8.00 / 6.00	11.00 / 8.50	14.00 / 11.00	16.00 / 12.00
Sound Pressure	Cooling	High/Low	dBA	35.0 / 32.0			38.0 / 33.0	39.0 / 34.0	40.0 / 35.0
Refrigerant				R-410A					
Power Supply				1~/220-240V/50Hz					
Piping connections	Liquid (OD)/Gas/Drain (OD)		mm	6.4 / 12.7 / 21					9.5 / 15.9 / 21