



INVERTER

FXLQ-P

Floor Standing Unit



BRC1E51



BRC1D52




BRC7C62



FXLQ20-25P

- New stylish modern casing: finished in RAL 9010 colour
- Unit can be installed as free standing model by use of optional back plate
- Ideal for installation beneath a window
- The use of inverter type outdoor units results in an air conditioning system with a high energy efficiency
- Home leave operation saves energy during absence
- Requires very little installation space
- Running the pipes from connections at the back, enables the unit to be wall mounted which in turn allows cleaning beneath the unit where dust tends to accumulate

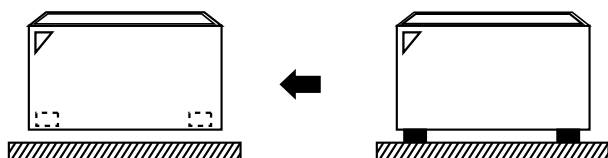

- Wired remote control can easily be integrated in the unit

FXLQ-P										
Indoor Units				20	25	32	40	50	63	
Capacity	Cooling	Nominal	kW	2.20	2.80	3.60	4.50	5.60	7.10	
	Heating	Nominal	kW	2.50	3.20	4.00	5.00	6.30	8.00	
Power input (50Hz)	Cooling	Nominal	kW	0.049		0.090		0.110		
	Heating	Nominal	kW	0.049		0.090		0.110		
Dimensions	(Height x Width x Depth)		mm	600x1,000x232		600x1,140x232		600x1,420x232		
Weight			kg	27		32		38		
Air Flow Rate	Cooling	HH/H/M/L	m³/min	- / 7 / - / 6		- / 8 / - / 6		- / 11 / - / 8.5	- / 14 / - / 11	- / 16 / - / 12
Refrigerant				R-410A						
Sound Power	Cooling	Nominal	dBA	-						
Sound Pressure	Cooling	HH/H/M/L	dBA	- / 35 / - / 32		- / 38 / - / 33		- / 39 / - / 34	- / 40 / - / 35	
Power Supply				1~/220-240V/50Hz						
Piping connections	Liquid (OD)/Gas/Drain		mm	6.35 / 12.7 / 21					9.52 / 15.9 / 21	
Casing colour				Pure white (RAL9010) + Iron gray (RAL7011)						