



# FXLQ-P

Floor standing unit



BRC1E51




BRC7C62



FXLQ20-25P

- New stylish modern casing: finished in RAL 9010 colour
- Unit can be installed as free standing model by use of optional back plate
- Ideal for installation beneath a window
- The use of inverter type outdoor units results in an air conditioning system with a high energy efficiency
- Home leave operation saves energy during absence
- Requires very little installation space
- Running the pipes from connections at the back, enables the unit to be wall mounted which in turn allows cleaning beneath the unit where dust tends to accumulate

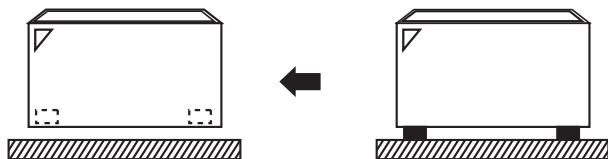

- Wired remote control can easily be integrated in the unit
- **BRC1E51A – new wired controller:** allows easy navigation through menu items, via a personalised display and minimal number of buttons. Provides a 7-day schedule timer, enabling the user to program the air conditioning daily or weekly, with up to 5 different actions per day possible

| FXLQ-P             |  |          |        | INVERTER         |      |                 |               |                  |                  |
|--------------------|--|----------|--------|------------------|------|-----------------|---------------|------------------|------------------|
| Indoor Units       |  |          |        | 20               | 25   | 32              | 40            | 50               | 63               |
| Capacity           | Cooling                                    | Nominal  | kW     | 2.20             | 2.80 | 3.60            | 4.50          | 5.60             | 7.10             |
|                    | Heating                                    | Nominal  | kW     | 2.50             | 3.20 | 4.00            | 5.00          | 6.30             | 8.00             |
| Power input (50Hz) | Cooling                                    | Nominal  | kW     | 0.049            |      | 0.090           |               | 0.110            |                  |
|                    | Heating                                    | Nominal  | kW     | 0.049            |      | 0.090           |               | 0.110            |                  |
| Dimensions         | (Height x Width x Depth)                   |          | mm     | 600x1,000x232    |      |                 | 600x1,140x232 |                  |                  |
| Weight             |  |          | kg     | 27               |      |                 | 32            |                  |                  |
| Air Flow Rate      | Cooling                                    | HH/H/M/L | m³/min | - / 7 / - / 6    |      | - / 8 / - / 6   |               | - / 11 / - / 8.5 | - / 14 / - / 11  |
| Refrigerant        |  |          |        | R-410A           |      |                 |               |                  |                  |
| Sound Power        | Cooling                                    | Nominal  | dBA    | -                |      |                 |               |                  |                  |
| Sound Pressure     | Cooling                                    | HH/H/M/L | dBA    | - / 35 / - / 32  |      | - / 38 / - / 33 |               | - / 39 / - / 34  | - / 40 / - / 35  |
| Power Supply       |  |          |        | 1~/220-240V/50Hz |      |                 |               |                  |                  |
| Piping connections | Liquid (OD)/Gas/Drain                      | mm       |        | 6.35 / 12.7 / 21 |      |                 |               |                  | 9.52 / 15.9 / 21 |
| Casing colour      | Pure white (RAL9010) + Iron grey (RAL7011) |          |        |                  |      |                 |               |                  |                  |