



Air Conditioning Technical Data

Large concealed ceiling unit



EEEN13-204

FXMQ-MA

TABLE OF CONTENTS

FXMQ-MA

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	3
3	Electrical data.....	5
	Electrical Data	5
4	Safety device settings	6
	Safety Device Settings	6
5	Options	7
	Options	7
6	Capacity tables	8
	Cooling Capacity Tables	8
	Heating Capacity Tables	9
	Capacity Correction Factor	10
7	Dimensional drawings	12
	Dimensional Drawings	12
8	Centre of gravity	13
	Centre of Gravity	13
9	Piping diagrams	14
	Piping Diagrams	14
10	Wiring diagrams	15
	Wiring Diagrams - Single Phase	15
11	Sound data.....	16
	Sound Level Data	16
	Sound Pressure Spectrum	17
12	Fan characteristics	18
	Fan Characteristics	18

1 Features

- Up to 270Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- Up to 31.5kW in heating mode

1



Inverter



Home leave operation



Fan only



Auto cooling-heating changeover



Fan speed steps



Dry programme



Air filter



Weekly timer



Infrared remote control



Wired remote control



Centralised control



Auto-restart



Self diagnosis



Drain pump kit

2 Specifications

2-1 Technical Specifications				FXMQ200MA		FXMQ250MA		
Cooling capacity	Nom.		kW	22.4 (1)		28.0 (1)		
Heating capacity	Nom.		kW	25.0 (2)		31.5 (2)		
Power input - 50Hz	Cooling	Nom.	kW	1.294		1.465		
	Heating	Nom.	kW	1.294		1.465		
Power input - 60Hz	Cooling	Nom.	kW	1.490		1.684		
	Heating	Nom.	kW	1.490		1.684		
Casing	Material			Galvanised steel plate				
Dimensions	Unit	Height	mm	470				
		Width	mm	1,380				
		Depth	mm	1,100				
Weight	Unit		kg	137				
Heat exchanger	Rows	Quantity		3				
	Fin pitch		mm	2.0				
	Face area		m²	0.68				
	Stages	Quantity		26				
Fan	Type			Sirocco fan				
	Quantity			2				
	Air flow rate - 50Hz	Cooling	High	m³/min	58	72		
			Low	m³/min	50	62		
	Air flow rate - 60Hz	Cooling	High	m³/min	58	72		
			Low	m³/min	50	62		
	External static pressure - 50Hz	High		Pa	221	270		
		Nom.		Pa	132	191		
	External static pressure - 60Hz	High		Pa	270			
		Nom.		Pa	132	147		
Fan motor	Quantity			2				
	Model			D13/4G2DA1				
	Output	High	W	380				
	Drive			Direct drive				
Sound pressure level	Cooling	High	dBA	48				
		Low	dBA	45				
Refrigerant	Type			R-410A				
	Control			Electronic expansion valve				
Piping connections	Liquid	Type		Flare connection				
		OD	mm	9.52				
	Gas	Type		Brazed connection				
		OD	mm	19.1		22.2		
	Drain			PS1B				
	Heat insulation			Glass fiber				
	Sound absorbing insulation			Glass fiber				
Temperature control				Microprocessor thermostat for cooling and heating				
Safety devices	Item	01		Fuse				
		02		Fan motor thermal protection				

Standard Accessories : Screws;
 Standard Accessories : Clamps;
 Standard Accessories : Sealing pads;
 Standard Accessories : Connection pipes;
 Standard Accessories : Installation and operation manual;

2-2 Electrical Specifications				FXMQ200MA	FXMQ250MA
Power supply	Name			VE	
	Phase			1~	
	Frequency		Hz	50/60	
	Voltage		V	220-240/220	
Voltage range	Min.		%	-10	
	Max.		%	10	

2 Specifications

2-2 Electrical Specifications				FXMQ200MA	FXMQ250 MA
Current - 50Hz	Minimum circuit amps (MCA)		A	8.1	9.0
	Maximum fuse amps (MFA)		A	15	
	Full load amps (FLA)	Total	A	6.5	7.2
Current - 60Hz	Minimum circuit amps (MCA)		A	9.0	10.1
	Maximum fuse amps (MFA)		A	15	
	Full load amps (FLA)	Total	A	7.2	8.1

Notes

- (1) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 7.5m (horizontal)
- (2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 7.5m (horizontal)
- (3) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.
- (4) The external static pressure is changeable: change the connectors inside the electrical box, this pressure means: High static pressure - Standard
- (5) The air filter is not a standard accessory, but please mount it in the duct system of the suction side. Select its colorimetric method (gravity method) 50% or more.
- (6) Sound pressure levels are measured at 220V.
- (7) Reference acoustic pressure 0 dB = 20 Pa.
- (8) Sound values are measured in an anechoic room.
- (9) Operation sound differs with operation and ambient conditions
- (10) Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
- (11) Maximum allowable voltage range variation between phases is 2%.
- (12) MCA/MFA: $MCA = 1.25 \times FLA$
- (13) $MFA \leq 4 \times FLA$
- (14) Next lower standard fuse rating minimum 15A
- (15) Select wire size based on the value of MCA
- (16) Instead of a fuse, use a circuit breaker

3 Electrical data

3 - 1 Electrical Data

FXMQ-MA

Units					Power supply		IFM		Input (W)	
Model	Type	Hz	Volts	Voltage range	MCA	MFA	kW	FLA	Cooling	Heating
FXMQ200MA	VE	50	220-240V	Max. 264V	8.1	15	0.380 x 2	6.5	1294	1294
FXMQ250MA				Min. 198V	9.0	15	0.380 x 2	7.2	1465	1465
FXMQ200MA	VE	60	220	Max. 242V	9.0	15	0.380 x 2	7.2	1490	1490
FXMQ250MA				Min. 198V	10.1	15	0.380 x 2	8.1	1684	1684

SYMBOLS

MCA	: Min. Circuit Amps. (A)
MFA	: Max. Fuse Amps. (See note 5)
kW	: Fan Motor Rated Output (kW)
FLA	: Full Load Amps. (A)
IFM	: Indoor Fan Motor.

NOTES

- 1 Voltage range
Units are suitable for use on electrical systems where the voltage supplied to the unit terminals is not below or above the listed range limits.
- 2 Maximum allowable voltage unbalance between phases is 2%.
- 3 MCA/MFA
MCA=1.25xFLA
MFA≤4xFLA
(next lower standard fuse rating, min.15A)
- 4 Select wire size based on the MCA.
- 5 Instead of fuse, use circuit breaker.

4D040330A

4 Safety device settings

4 - 1 Safety Device Settings

FXMQ-MA

Safety devices		200	250
PC board fuse		250V 10A	250V 10A
Fan motor thermal fuse	°C	-	-
Fan motor thermal protector	°C	OFF: 135 ^{±5} (ON: 87 ^{±15})	OFF: 135 ^{±5} (ON: 87 ^{±15})

3D034597J

5 Options

5 - 1 Options

FXMQ-MA

Item	Model	Duct Type	
		FXMQ200MA	FXMQ250MA
Drain pump kit	Type	KDU30L250VE	
	Z No.	Z980500	
High efficiency filter	65%	Type	KAFJ372L280
		AS No.	AS3600873
	90%	Type	KAFJ373L280
		AS No.	AS36000873
Filter chamber	Type	KDJ3705L280	
	AS No.	AS3600874	
Long life replacement filter	Type	KAFJ371L280	
	AS No.	AS3600872	

3D040334C

NOTE

- See the latest for the modification marks.

FXMQ-MA

Item	Type		FXMQ-MA
	Infrared	H/P	
Remote controller	Infrared	H/P	BRC4C62
	Wired		BRC1D52 / BRC1E52A/B
Simplified remote controller			BRC2C51
Remote control for hotel use			BRC3A61
Adapter for wiring			KRP1B61
Wiring adapter for electrical appendices (1)			KRP2A61
Wiring adapter for electrical appendices (2)			KRP4AA51
Remote sensor			KRCS01-1B
Central remote control			DCS302C51
Electric box with earth terminal - 3 blocks			KJB311AA
Unified ON/OFF control			DCS301B51
Electric box with earth terminal - 2 blocks			KJB212AA
Noise filter (for electromagnetic interface use only)			KEK26-1A
Schedule timer			DST301B51
External control adapter for outdoor unit (must be installed on indoor unit)			DTA104A61

3D034600F

Notes:

- (1):Up to 2 installation boxes can be installed for each indoor unit.
 (2):Installation box (No. 7) is necessary for each adaptor.

6 Capacity tables

6 - 1 Cooling Capacity Tables

FXMQ-MA

TC: Total capacitykW – SHC: Sensible capacitykW

Unit size	Nominal capacity	Outdoor air temp.	Indoor air temperature													
			14.0WB		16.0WB		18.0WB		19.0WB		20.0WB		22.0WB		24.0WB	
			20.0DB		23.0DB		26.0DB		27.0DB		28.0DB		30.0DB		32.0DB	
			°CDB	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC
200	22.4	10.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.8	17.6	29.4	17.8
		12.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.8	17.6	29.0	17.6
		14.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.8	17.6	28.7	17.4
		16.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.8	17.6	28.3	17.2
		18.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.8	17.6	27.9	16.9
		20.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.8	17.6	27.5	16.7
		21.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.8	17.6	27.4	16.6
		23.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.4	17.3	27.0	16.4
		25.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	26.1	17.1	26.6	16.2
		27.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	25.7	16.8	26.2	16.1
		29.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	25.3	16.6	25.8	15.9
		31.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	24.9	16.4	25.4	15.7
		33.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.8	17.0	24.5	16.3	25.0	15.6
		35.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.6	17.0	24.2	16.1	24.6	15.4
		37.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	23.2	16.8	23.8	16.0	24.3	15.3
		39.0	15.1	13.4	18.0	14.9	21.0	16.3	22.4	16.8	22.8	16.6	23.4	15.8	23.9	15.1
250	28.0	10.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	33.5	22.1	36.8	22.1
		12.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	33.5	22.1	36.3	21.8
		14.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	33.5	22.1	35.9	21.6
		16.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	33.5	22.1	35.4	21.3
		18.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	33.5	22.1	34.9	21.0
		20.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	33.5	22.1	34.4	20.7
		21.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	33.5	22.1	34.2	20.6
		23.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	33.0	21.7	33.7	20.3
		25.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	32.6	21.5	33.2	20.2
		27.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	32.1	21.2	32.8	20.0
		29.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	31.6	20.9	32.3	19.9
		31.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	31.1	20.6	31.8	19.7
		33.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.8	21.2	30.6	20.4	31.3	19.5
		35.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.5	21.1	30.2	20.2	30.8	19.4
		37.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	20.9	29.0	20.9	29.7	20.0	30.4	19.2
		39.0	18.9	16.9	22.5	18.5	26.2	20.4	28.0	21.0	28.5	20.6	29.2	19.8	29.9	19.0

6 Capacity tables

6 - 2 Heating Capacity Tables

FXMQ-MA

Unit Size	Nominal capacity	Outdoor air temperature		Indoor air temperature °CDB					
				16.0	18.0	20.0	21.0	22.0	24.0
		°CDB	°CWB	kW	kW	kW	kW	kW	kW
200	25.0	-19.8	-20.0	14.8	14.7	14.7	14.7	14.6	14.6
		-18.8	-19.0	15.2	15.2	15.1	15.1	15.1	15.0
		-16.7	-17.0	16.1	16.0	16.0	16.0	16.0	15.9
		-14.7	-15.0	17.0	16.9	16.9	16.9	16.8	16.8
		-12.6	-13.0	17.9	17.8	17.8	17.7	17.7	17.7
		-10.5	-11.0	18.7	18.7	18.6	18.6	18.6	18.6
		-9.5	-10.0	19.2	19.1	19.1	19.1	19.0	19.0
		-8.5	-9.1	19.6	19.5	19.5	19.5	19.4	19.4
		-7.0	-7.6	20.2	20.2	20.2	20.1	20.1	20.1
		-5.0	-5.6	21.1	21.1	21.0	21.0	21.0	20.9
		-3.0	-3.7	22.0	21.9	21.9	21.9	21.8	21.8
		0.0	-0.7	23.3	23.2	23.2	23.2	23.2	21.8
		3.0	2.2	24.6	24.5	24.5	24.2	23.4	21.8
		5.0	4.1	25.4	25.4	25.0	24.2	23.4	21.8
		7.0	6.0	26.2	26.2	25.0	24.2	23.4	21.8
		9.0	7.9	27.1	26.6	25.0	24.2	23.4	21.8
		11.0	9.8	27.9	26.6	25.0	24.2	23.4	21.8
		13.0	11.8	28.2	26.6	25.0	24.2	23.4	21.8
		15.0	13.7	28.2	26.6	25.0	24.2	23.4	21.8
250	31.5	-19.8	-20.0	18.6	18.5	18.5	18.5	18.4	18.4
		-18.8	-19.0	19.2	19.1	19.0	19.0	19.0	18.9
		-16.7	-17.0	20.3	20.2	20.2	20.1	20.1	20.0
		-14.7	-15.0	21.4	21.3	21.3	21.2	21.2	21.2
		-12.6	-13.0	22.5	22.4	22.4	22.4	22.3	22.3
		-10.5	-11.0	23.6	23.6	23.5	23.5	23.4	23.4
		-9.5	-10.0	24.2	24.1	24.1	24.0	24.0	23.9
		-8.5	-9.1	24.7	24.6	24.6	24.5	24.5	24.4
		-7.0	-7.6	25.5	25.4	25.4	25.4	25.3	25.3
		-5.0	-5.6	26.6	26.6	26.5	26.5	26.4	26.4
		-3.0	-3.7	27.7	27.6	27.6	27.5	27.5	27.5
		0.0	-0.7	29.3	29.3	29.2	29.2	29.2	27.5
		3.0	2.2	31.0	30.9	30.8	30.5	29.5	27.5
		5.0	4.1	32.0	32.0	31.5	30.5	29.5	27.5
		7.0	6.0	33.1	33.0	31.5	30.5	29.5	27.5
		9.0	7.9	34.1	33.5	31.5	30.5	29.5	27.5
		11.0	9.8	35.2	33.5	31.5	30.5	29.5	27.5
		13.0	11.8	35.5	33.5	31.5	30.5	29.5	27.5
		15.0	13.7	35.5	33.5	31.5	30.5	29.5	27.5

6 Capacity tables

6 - 3 Capacity Correction Factor

FXMQ-MA

		Capacity correction factor Te = 9°C							
	Indoor air temperature	14.0 °CWB	16.0 °CWB	18.0 °CWB	19.0 °CWB	20.0 °CWB	22.0 °CWB	24.0 °CWB	
		20.0 °CDB	23.0 °CDB	26.0 °CDB	27.0 °CDB	28.0 °CDB	30.0 °CDB	32.0 °CDB	
FXMQ200MA	TC	0.679	0.701	0.762	0.788	0.810	0.836	0.859	
	SHF	1.136	1.164	1.109	1.085	1.070	1.060	1.051	
FXMQ250MA	TC	0.687	0.717	0.781	0.800	0.815	0.841	0.864	
	SHF	1.129	1.151	1.099	1.081	1.069	1.053	1.056	

3D079901

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - Примечания - NOTLAR

How to use this table - So verwenden Sie diese Tabelle - Πώς θα χρησιμοποιήσετε αυτό τον πίνακα - Cómo utilizar esta tabla - Utilisation de ce tableau - Come utilizzare questa tabella - Gebruik van deze tabel - Как пользоваться этой таблицей - Bu tablo nasıl kullanılır?:

- Capacity : Total capacity for High sensible mode = Total capacity for normal capacity table X TC ratio.

Leistung: Gesamtleistung für hochfühlbaren Leistungsmodus = Gesamtleistung für normale Leistungstabelle x GL-Verhältnis.

Απόδοση: Συνολική απόδοση για τη λειτουργία υψηλής ευαισθησίας = Συνολική απόδοση για τον πίνακα κανονικών αποδόσεων X αναλογία TC

Capacidad: Capacidad total para el modo de alta sensibilidad = Capacidad total para la tabla de capacidad normal X relación TC.

Capacité sensible (FCS) (Facteur de chaleur sensible) – en anglais : SHF) : FCS pour le mode sensibilité élevée (« High ») = FCS du tableau des capacités normales x rapport FCS.

Capacità: Capacità totale per modalità ad alta capacità sensibile = Capacità totale per tabella capacità normali X rapporto TC.

Capaciteit: totale capaciteit in modus grote ("High") gevoeligheid = totale capaciteit uit de tabel met normale capaciteiten x TC-ratio.

Производительность: Общая производительность для режима с высоким коэфф. ошутимого охлаждения = Общая производительность для нормального режима, таблица X коэфф. TC.

Kapasite: Yüksek algı modu için toplam kapasite = Normal kapasite tablosundaki toplam kapasite değeri x TC oranı.

- Sensible capacity (SHF): SHF for High sensible mode = SHF for normal capacity table X SHF ratio .

Fühlbare Leistung (SHF): SHF für hochfühlbaren Leistungsmodus = SHF für normale Leistungstabelle x SHF-Verhältnis.

Αισθητή απόδοση (SHF): SHF για λειτουργία υψηλής ευαισθησίας = SHF για πίνακα κανονικών αποδόσεων X αναλογία SHF .

Capacidad sensible (FCS): SHF para el modo de alta sensibilidad = SHF para la tabla de capacidad normal X relación SHF.

Capacité sensible (FCS) (Facteur de chaleur sensible) – en anglais : SHF) : FCS pour le mode sensibilité élevée (« High ») = FCS du tableau des capacités normales x rapport FCS.

Capacità sensibile (SHF): SHF per modalità ad alta capacità sensibile = SHF per tabella capacità normali X rapporto SHF.

Gevoeligheidsfactor (WGF (warmtegevoelsfactor) – in het Engels "SHF"): WGF voor de modus grote ("High") gevoeligheid = WGF uit de tabel met normale capaciteiten x WGF-ratio.

Ощутимая производительность (SHF): SHF для режима с высоким коэфф. ошутимого охлаждения = SHF для нормального режима, таблица X коэфф. SHF. Algılanabilir kapasite (SHF): Yüksek algı modu için SHF = Normal kapasite tablosundaki SHF değeri x SHF oranı.

- In case of SHF is bigger than 1 , SHF is "1"
Für den Fall, dass SHF größer als 1 ist, wird SHF als "1" angenommen.
Σε περίπτωση που το SHF είναι μεγαλύτερο από 1, το SHF είναι "1"
En caso de que SHF sea superior a 1 , SHF equivale a "1"
Si FCS est supérieure à 1, utilisez « 1 » pour FCS.
Qualora il valore SHF sia maggiore di 1 , SHF è "1"
Indien WGF groter is dan 1, neem dan "1" voor WGF.
Если SHF больше 1, то SHF равен "1"
SHF değeri 1'den büyükse, SHF değeri "1" kabul edilmelidir

6 Capacity tables

6 - 3 Capacity Correction Factor

6

FXMQ-MA

		Capacity correction factor Te = 11°C						
	Indoor air temperature	14.0 °CWB	16.0 °CWB	18.0 °CWB	19.0 °CWB	20.0 °CWB	22.0 °CWB	24.0 °CWB
		20.0 °CDB	23.0 °CDB	26.0 °CDB	27.0 °CDB	28.0 °CDB	30.0 °CDB	32.0 °CDB
FXMQ200MA	TC	0.544	0.563	0.593	0.634	0.668	0.722	0.759
	SHF	1.136	1.226	1.253	1.195	1.155	1.114	1.097
FXMQ250MA	TC	0.548	0.578	0.617	0.657	0.685	0.728	0.765
	SHF	1.129	1.209	1.230	1.178	1.146	1.108	1.095

3D079901

NOTES - ANMERKUNGEN - Σημειώσεις - NOTAS - REMARQUES - NOTE - OPMERKINGEN - Примечания - NOTLAR

How to use this table - So verwenden Sie diese Tabelle - Πώς θα χρησιμοποιήσετε αυτό τον πίνακα - Cómo utilizar esta tabla - Utilisation de ce tableau - Come utilizzare questa tabella - Gebruik van deze tabel - Как пользоваться этой таблицей - Bu tablo nasıl kullanılmalı?:

- Capacity : Total capacity for High sensible mode = Total capacity for normal capacity table X TC ratio.

Leistung: Gesamtleistung für hochfühlbaren Leistungsmodus = Gesamtleistung für normale Leistungstabelle x GL-Verhältnis.

Απόδοση: Συνολική απόδοση για τη λειτουργία υψηλής ευαισθησίας = Συνολική απόδοση για τον πίνακα κανονικών αποδόσεων X αναλογία TC

Capacidad: Capacidad total para el modo de alta sensibilidad = Capacidad total para la tabla de capacidad normal X relación TC.

Capacité sensible (FCS (Facteur de chaleur sensible) – en anglais : SHF) : FCS pour le mode sensibilité élevée (« High ») = FCS du tableau des capacités normales x rapport FCS.

Capacità: Capacità totale per modalità ad alta capacità sensibile = Capacità totale per tabella capacità normali X rapporto TC.

Capaciteit: totale capaciteit in modus grote ("High") gevoeligheid = totale capaciteit uit de tabel met normale capaciteiten x TC-ratio.

Производительность: Общая производительность для режима с высоким коэфф. охлуждения = Общая производительность для нормального режима, таблица X коэфф. TC.

Kapasite: Yüksek algı modu için toplam kapasite = Normal kapasite tablosundaki toplam kapasite değeri x TC oranı.

- Sensible capacity (SHF): SHF for High sensible mode = SHF for normal capacity table X SHF ratio .

Fühbare Leistung (SHF): SHF für hochfühlbaren Leistungsmodus = SHF für normale Leistungstabelle x SHF-Verhältnis.

Αισθητή απόδοση (SHF): SHF για λειτουργία υψηλής ευαισθησίας = SHF για πίνακα κανονικών αποδόσεων X αναλογία SHF .

Capacidad sensible (FCS): SHF para el modo de alta sensibilidad = SHF para la tabla de capacidad normal X relación SHF.

Capacité sensible (FCS (Facteur de chaleur sensible) – en anglais : SHF) : FCS pour le mode sensibilité élevée (« High ») = FCS du tableau des capacités normales x rapport FCS.

Capacità sensibile (SHF): SHF per modalità ad alta capacità sensibile = SHF per tabella capacità normali X rapporto SHF.

Gevoeligheidscapaciteit (WGF (warmtegevoelsfactor)– in het Engels "SHF"): WGF voor de modus grote ("High") gevoeligheid = WGF uit de tabel met normale capaciteiten x WGF-ratio.

Ощутимая производительность (SHF): SHF для режима с высоким коэфф.

ощутимого охлаждения = SHF для нормального режима, таблица X коэфф. SHF. Algılanabilir kapasite (SHF): Yüksek algı modu için SHF = Normal kapasite tablosundaki SHF değeri x SHF oranı.

- In case of SHF is bigger than 1 , SHF is "1"

Für den Fall, dass SHF größer als 1 ist, wird SHF als "1" angenommen.

Σε περίπτωση που το SHF είναι μεγαλύτερο από 1, το SHF είναι "1"

En caso de que SHF sea superior a 1 , SHF equivale a "1"

Si FCS est supérieur à 1 , utilisez « 1 » pour FCS.

Qualora il valore SHF sia maggiore di 1 , SHF è "1"


Indien WGF groter is dan 1, neem dan "1" voor WGF.

Если SHF больше 1, то SHF равен "1"

SHF değeri 1'den büyükse, SHF değeri "1" kabul edilmelidir

7 - 1 Dimensional Drawings


7 - 1 Dimensional Drawings

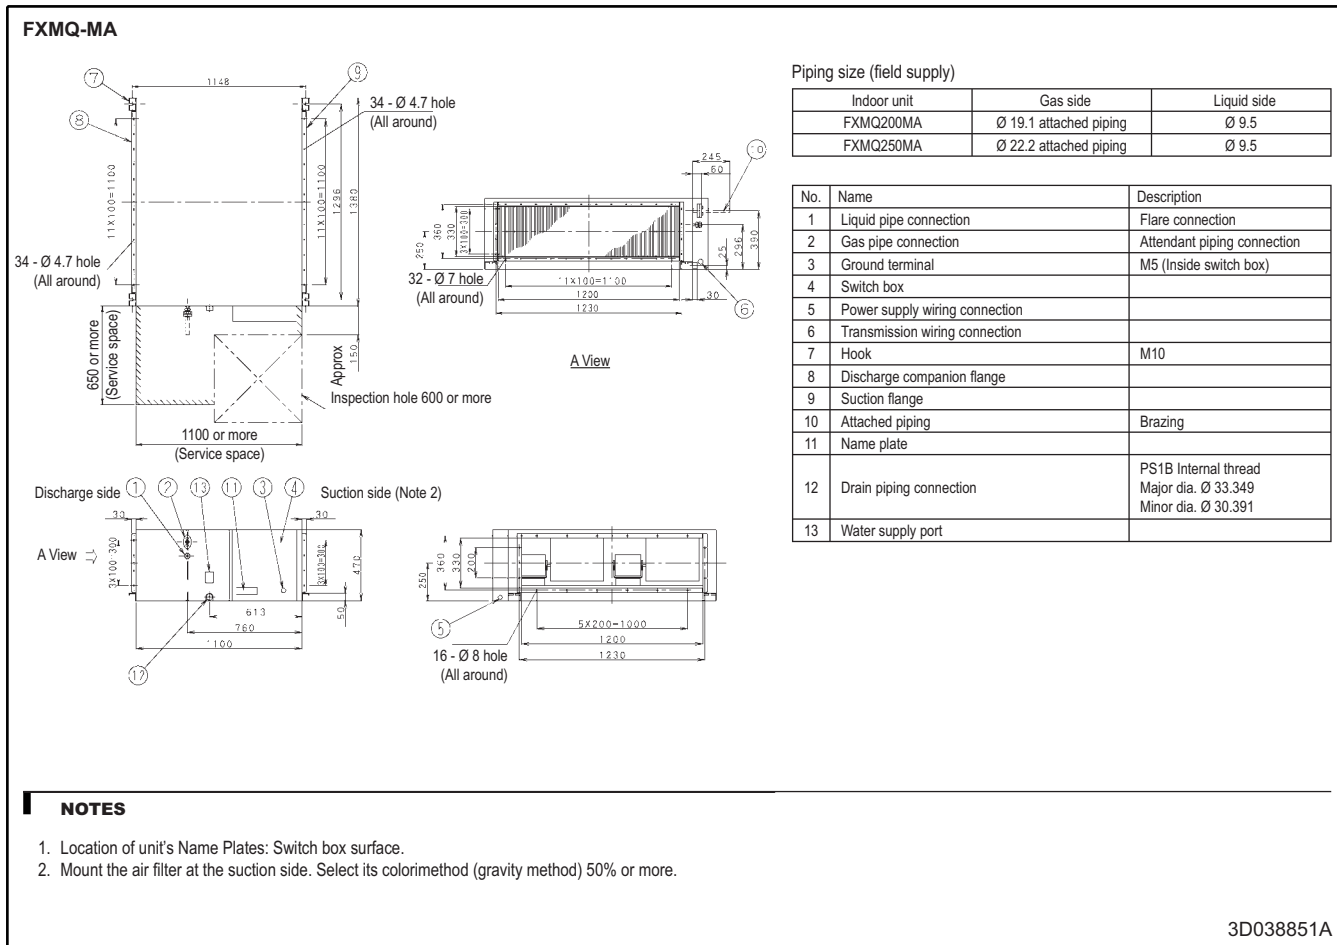

8 Centre of gravity

8 - 1 Centre of Gravity

FXMQ200,250MA

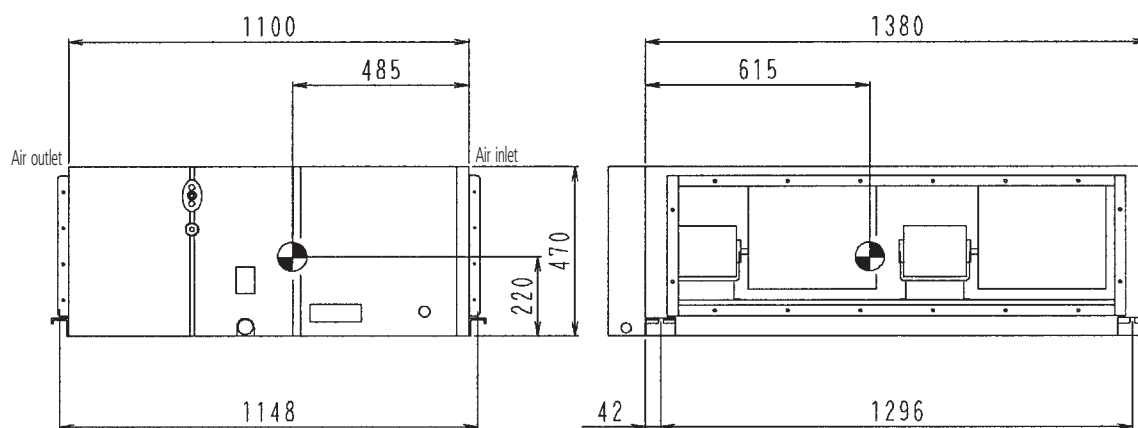


4D035171

9 Piping diagrams

9 - 1 Piping Diagrams

FXMQ-MA

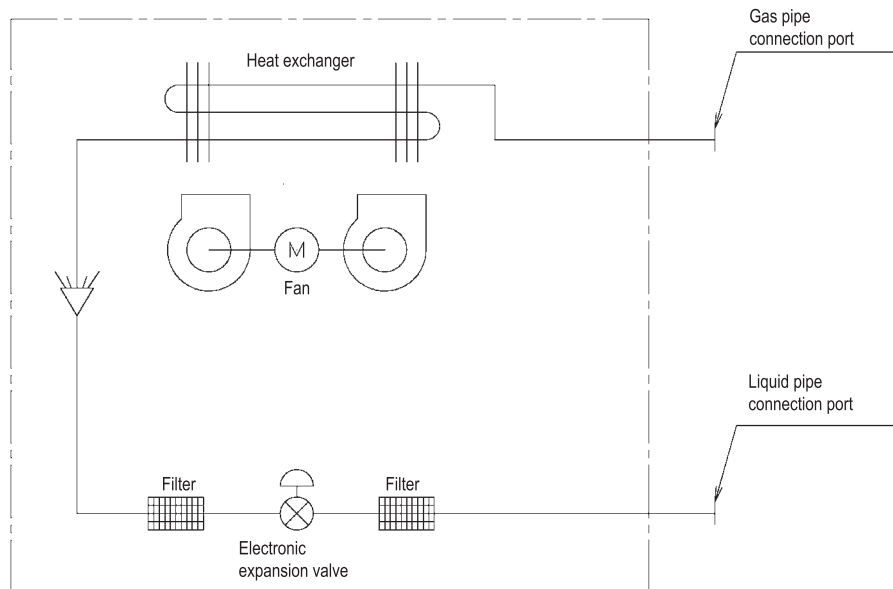


4D034245G

10 Wiring diagrams

10 - 1 Wiring Diagrams - Single Phase

FXMQ200,250MA

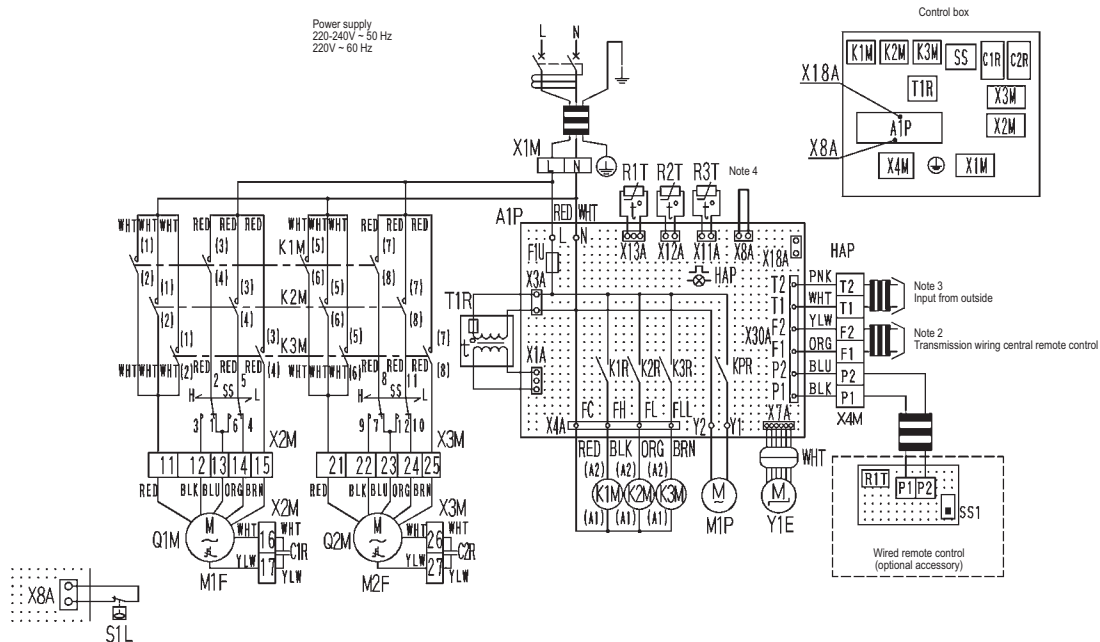

Indoor unit		R2T, R3T	Thermistor (coil)	Wired remote control	
A1P	Printed circuit board	SS	Selector switch (static pressure)	R1T	Thermistor (air)
C1R, C2R	Capacitor (M1F, 2F)	T1R	Transformer (220-240V/22V)	SS1	Select switch (main/sub)
F1U	Fuse (5A, 250V)	X1M	Terminal block (power)	Connector for optional parts	
HAP	Light emitting diode (service monitor-green)	X2M, X3M	Terminal block	X8A	Connector (float switch)
K1M	Magnetic contactor (M1F, 2F)	X4M	Terminal block (control)	X18A	Connector (wiring adapter for electrical appendices)
K2M	Magnetic contactor (M1F, 2F)	Y1E	Electronic expansion valve		
K3M	Magnetic contactor (M1F, 2F)	Optional parts			
K1R - K3R	Magnetic relay (M1F, 2F)	M1P	Motor (drain pump)		
KPR	Magnetic relay (M1P)				
M1F, M2F	Motor (indoor fan)				
Q1M, Q2M	Thermo switch (M1F, 2F embedded)				
R1T	Thermistor (air)				

PNK: pink	WHT: white
YLW: yellow	ORG: orange
BLU: blue	BLK: black
RED: red	BRN: brown

3D039621D


NOTES

- : terminal block, □□□□ : connector, —○— : terminal, □□□□ : short circuit connector, —□— : field wiring
- In case using central remote control, connect it to the unit in accordance with the attached instruction manual.
- When connecting the input wires from outside, forced off or on/off control operation can be selected by remote control. In details, refer to the installation manual attached to the unit.
- In case installing the drain pump, remove the short circuit connector of X8A and execute the additional wiring for float switch and drain pump.
- Use copper conductors only.
- In case high E.S.P. operation, change the switch (SS) for 'H'.

11 Sound data

11 - 1 Sound Level Data

FXMQ-MA

Model	Sound pressure level - 220V			Sound power level
	H	L	Measuring location	
FXMQ200MA	48	45		*
FXMQ250MA	48	45		*

NOTES


- 1 Reference acoustic pressure 0 dB = 20 Pa.
- 2 Measuring place: anechoic chamber
- 3 Operation noise differs with operation and ambient conditions.
*Data were not available at the time of publication

11 Sound data

11 - 2 Sound Pressure Spectrum


FXMQ200MA

4D035168

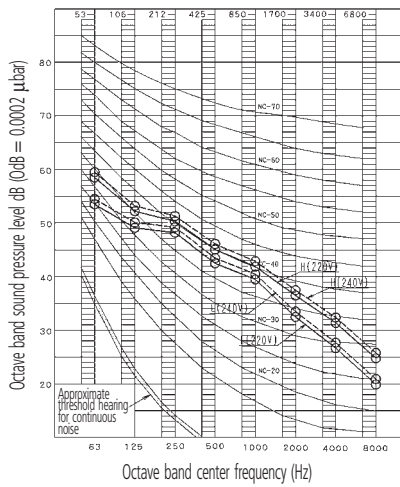

FXMQ250MA

4D035169

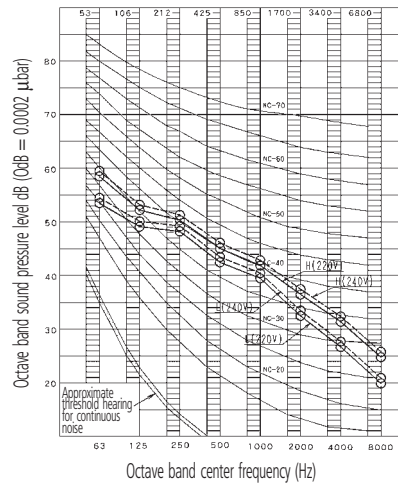


12 Fan characteristics

12 - 1 Fan Characteristics

12

FXMQ200MA

50Hz 220V
(mmH₂O) (PA)

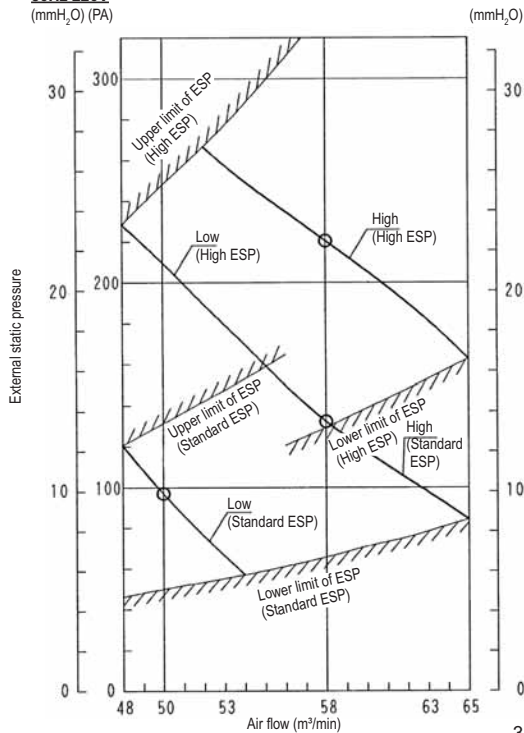


3D035172

NOTES

1. The remote control can be used to switch between "high" and "low".
2. The air flow is set to "standard" before leaving the factory. It is possible to switch between "standard ESP" and "high ESP" by changing the switch in the indoor unit electrical box.

FXMQ200MA

60Hz 220V
(mmH₂O) (PA)

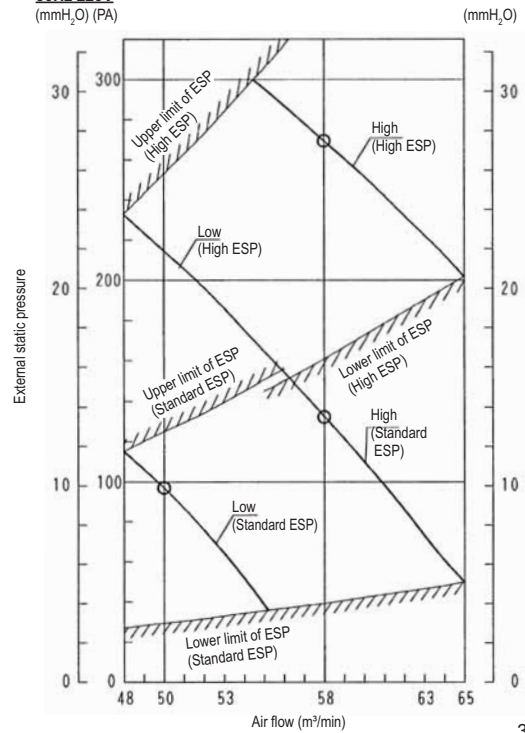


3D035172

NOTES

1. The remote control can be used to switch between "high" and "low".
2. The air flow is set to "standard" before leaving the factory. It is possible to switch between "standard ESP" and "high ESP" by changing the switch in the indoor unit electrical box.

FXMQ250MA

60Hz 220V
(mmH₂O) (PA)

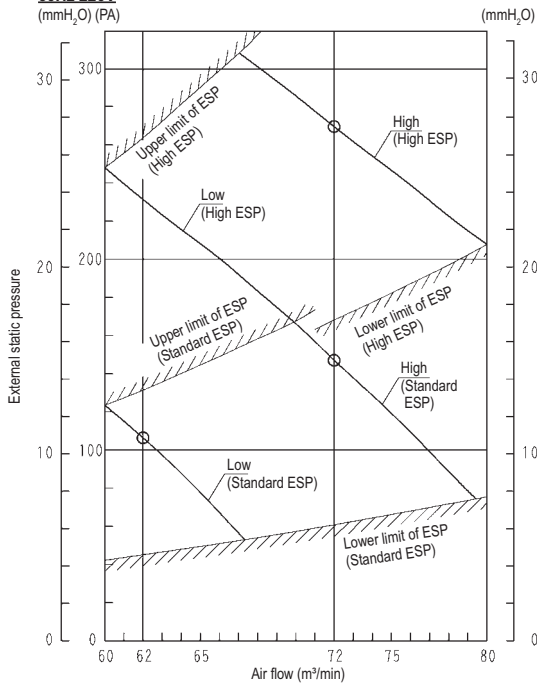


3D035173A

NOTES

1. The remote control can be used to switch between "high" and "low".
2. The air flow is set to "standard" before leaving the factory. It is possible to switch between "standard ESP" and "high ESP" by changing the switch in the indoor unit electrical box.

FXMQ250MA

50Hz 220V
(mmH₂O) (PA)

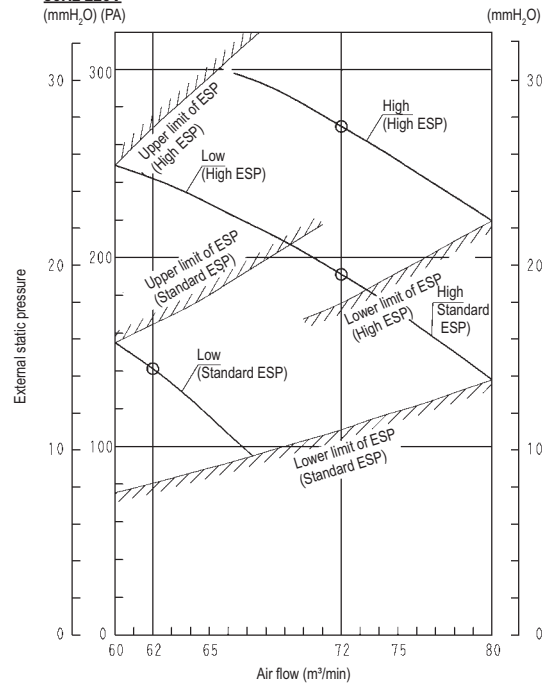

3D035173A

NOTES

1. The remote control can be used to switch between "high" and "low".
2. The air flow is set to "standard" before leaving the factory. It is possible to switch between "standard ESP" and "high ESP" by changing the switch in the indoor unit electrical box.



These products are not within the scope of the Eurovent certification program

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.

BARCODE

Daikin products are distributed by: