



FXMQ-PVE

Concealed Ceiling Unit (Inverter Fan)



BRC1D52




BRC4C66/C65



FXMQ40PVE

- Compact height of 300mm, allows installation in narrow ceiling voids
- More than 200 Pa external static pressure allows extensive ductwork runs and flexible application
- Possibility to change ESP through wired remote control allows optimisation of the supply air volume (changeable in 13 or 14 stages)
- Reduction of power consumption through use of new DC fan motor technology
- Built-in drain pump

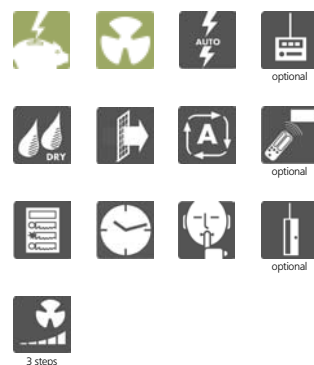

FXMQ-PVE

Indoor Units			40	50	63	80	100	125	
Capacity	Cooling	kw	4.50	5.60	7.10	9.00	11.20	14.00	
	Heating	kw	5.00	6.30	8.00	10.00	12.50	16.00	
Power input (Nominal)	Cooling	kw	0.194	0.215	0.23	0.298	0.376	0.461	
	Heating	kw	0.182	0.203	0.218	0.286	0.364	0.449	
Dimensions	(Height x Width x Depth)	mm	300x700x700		300x1000x700		300x1400x700		
Weight		kg	28		36		46		
Air Flow Rate	Cooling	High/Low	m ³ /min	13.00 / 11.0	16.5/15.0	17.5/16.0	22.5 / 20.0	27.0 / 23.0	33.0 / 28.0
Refrigerant			R-410A						
Power Supply			1~/220-240V/50Hz						
Piping connections	Liquid (OD)/Gas/Drain	mm	6.4 / 12.7 / 32		9.5 / 15.9 / 32				