




FXMQ-P

Concealed Ceiling Unit (Inverter Fan)



BRC1D52 BRC4C65 FXMQ40P

- Reduction of power consumption through use of new DC fan motor technology
- Improved comfort thanks to 3-step airflow control
- Compact height of 300mm, allows installation in narrow ceiling voids
- Up to 200 Pa external static pressure allows extensive ductwork runs and flexible application
- Possibility to change ESP through wired remote control allows optimisation of the supply air volume (changeable in 13 or 14 stages)
- Built-in drain pump with 700mm lift fitted as standard
- Allows multi tenant applications (option PCB required)

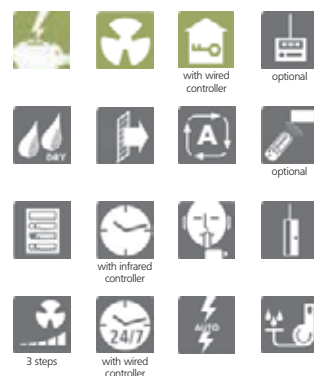

FXMQ-PVE									
Indoor Units			40	50	63	80	100	125	
Capacity	Cooling	kW	4.50	5.60	7.10	9.00	11.20	14.00	
	Heating	kW	5.00	6.30	8.00	10.00	12.50	16.00	
Power input (Nominal)	Cooling	kW	0.194	0.215	0.23	0.298	0.376	0.461	
	Heating	kW	0.182	0.203	0.218	0.286	0.364	0.449	
Dimensions	(Height x Width x Depth)	mm	300x700x700			300x1000x700		300x1400x700	
Weight		kg	28		36		46		
Air Flow Rate	Cooling	HH/H/L	m³/min	16.0 / 13.0 / 11.0	18.0 / 16.5 / 15.0	19.5 / 17.5 / 16.0	25.0 / 22.5 / 20.0	32.0 / 27.0 / 23.0	39.0 / 33.0 / 28.0
External Static Pressure	H/S/L	Pa	160 / 100 / 30		200 / 100 / 50				
Refrigerant			R-410A						
Power Supply			1~220-240V/50Hz						
Piping connections	Liquid (OD)/Gas/Drain (OD)	mm	6.4 / 12.7 / 32			9.5 / 15.9 / 32			