



# FXNQ-MA

## Concealed floor standing unit



FXNQ20,25MA

 new



- Ideal for installation beneath a window
- All models are available with remote control
- The floor standing model requires very little installation space

- The connecting port faces downward, eliminating the need to attach auxiliary piping (FXNQ-M)

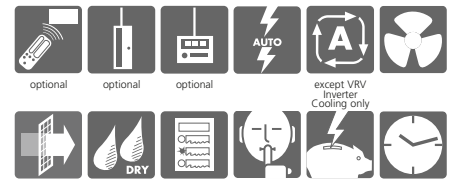

### FXNQ-MA

INDOOR UNIT			20	25	32	40	50	63	
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1	
Heating capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0	
Nominal input	cooling	W	49	49	90	90	110	110	
	heating	W	49	49	90	90	110	110	
Dimensions (HxWxD)		mm	610x930x220		610x1070x220		610x1350x220		
Weight		kg	19		23		27		
Air flow rate (H/L)		m <sup>3</sup> /min	7/6	7/6	8/6	11/8.5	14/11	16/12	
Sound pressure level (H/L)(220V)		dB(A)	35/32	35/32	35/32	38/33	39/34	40/35	
Sound power level		dB(A)	*	*	*	*	*	*	
Refrigerant type			R-410A						
Power supply		VE	1~, 50Hz, 220-240V						
Piping connections	liquid/gas	mm	ø6.4/ø12.7					ø9.5/ø15.9	
Infrared remote control	cooling		BRC4C64						
	heating		BRC4C62						
Wired remote control			BRC1D52						

\* Sound power levels were not available at time of publication